



SALISBURY

by Honeywell

YOUR SINGLE SOURCE FOR
INDUSTRIAL ELECTRICAL PROTECTION



His world in your hands, your safety in ours.



Come Home Safe.

Your profession relies on you to operate safely among electrical and arc flash hazards. You can rely on Salisbury to provide head-to-toe PPE solutions to protect you from harm. We are committed to putting the best products on the market and standing behind them with a name that has been trusted for over 150 years.

Lives depend on you. Protect yourself with Salisbury

SALISBURY
by Honeywell

World leader in electrical safety PPE

www.SalisburybyHoneywell.com | 877.406.4501

© 2015 Honeywell International Inc.

CONTENTS



SALISBURY ASSESSMENT SOLUTIONS (SAS)

Salisbury Assessment Solutions (SAS) 6-13



FACE, HEAD AND NECK PROTECTION & ACCESSORIES

AS1000 – AS2000 Series Face Shields	15-24
Replacement Lenses	15, 17, 19
Replacement Brackets	20
Protective Nets & Glasses	20
HRC2 Face, Head & Neck Protection Kit	21
AFHOOD's	22
NEW 40 cal/cm ² Lift Front Hood	22-23
Air Flow Hood Systems	24



PRO-WEAR® ARC FLASH PROTECTION CLOTHING & KITS

Sizing & Material Weights.	26
Quick Reference Chart & CE Information	27
PRO-HOOD®	24, 28
Coats	29
Bib Overalls.	30
Coveralls & Overpants	25
Coveralls & Overpants Kits.	32-33
HRC2 8, 12, 20 cal/cm ² Kits &	
HRC3 31 cal/cm ² Kit	34
PRO-WEAR® Premium Light Weight 40 cal/cm ²	35
HRC4 40 cal/cm ² Kit &	
HRC4 55 & 75 cal/cm ² Kit	36
HRC4 100 cal/cm ² Kit	37
Arc Rated Rain Wear & Hi-Vis Vest	38
Work Gloves	39
Backpack, Tool & Storage Bags	40
Salisbury HRC Category PPE Chart	41



PERSONAL ELECTRICAL SHOCK PROTECTION & ACCESSORIES

Protective Rubber Equipment Labeling Chart.	42
Personal Electrical Shock Protection Information.	43
Low Voltage Molded Sleeves	44
Rubber Insulating Gloves	45
Leather Protectors & Liners	46
Glove Kits	47
Arc Flash Protection Gloves	47
Glove Accessories	48, 55
Dielectric Footwear	48
Protective Blankets, Matting & Accessories	49-50
Rescue Hook & Static Discharge Stick	51
Clampsticks & Switch Sticks	52
Grounding Equipment.	53-54
Voltage Detectors, General Cleaners &	
Glove Dust.	55
Important Safety Information for PPE	56



INSULATED HAND TOOLS & KITS

Salisbury Insulated Products	57
Insulated Hand Tool Kits.	58-63, 65-66, 68
Individual Insulated Hand Tools & Sets	64-65, 67-82
Ratchet & Sockets Sets	85-86
Specialized Tools, Boxes & Rolls	87
Non-Conductive Tools	88, 89
Non-Sparking & Non-Magnetic	
Insulated Tools	90-92
Definitions	93
Index	94-98
Limited Warranty	98

SALISBURY
by Honeywell

*The most comprehensive
electrical safety PPE
solutions in the industry.*



SALISBURY

EYE PROTECTION p. 20

- Safety Glasses

HEAD, FACE & NECK PROTECTION p. 15-24

- Hard Hats and Face shields
- **NEW** Lift Front Hood
- AFHOOD's, PRO-HOOD® and Protective Nets

BODY PROTECTION p. 26-39, 44 PRO-WEAR®

- Arc Flash Protection Clothing
- HRC2 Coveralls and Overpants
- HRC2-HRC4 PRO-HOOD®
- HRC2-HRC4 Coats and Bib Overalls
- Arc Rated Rainwear
- Low Voltage Sleeves

HAND PROTECTION p. 39, 45-47

- Insulating Rubber Gloves
- Leather Protectors and Kits
- HRC2 - HRC4 Arc Flash Protection Gloves
- Work gloves

DIELECTRIC FOOTWEAR p. 48

- Protective Boots and Overshoes

ELECTRICAL SHOCK PROTECTIVE EQUIPMENT p. 49-55

- Rubber Insulating Blankets and Accessories
- Hot Sticks and Accessories
- Grounding Equipment

INSULATED TOOLS p. 58-92

- S.I.P. Insulated Hand Tools

HELPING TO MEET YOUR NEEDS.

Salisbury is the most complete Personal Protective Equipment (PPE) provider for all electrical workers. The need for a comprehensive electrical safety program that's easy to use has never been more critical.

The NFPA 70E Standard and OSHA Regulations have been established to protect workers from electrical shock and arc flash hazards and to educate workers about the protection needed from these dangers.

For example, the NFPA 70E Standard specifies areas where arc flash protection is required for workers involved in the maintenance of energized or potentially energized electrical equipment. All personnel within the defined boundaries must wear specified protective equipment, even on circuits as low as 50 volts.

The NFPA 70E Standard and OSHA Regulations MUST be met, and Salisbury has made it easy to meet them.

To ease the burden of meeting all the necessary safety standards and requirements, we've developed convenient Personal Protective Equipment Kits. All of the arc flash and shock protection PPE kits meet the safety standards categorized by the PPE Category for each job.

Salisbury electrical safety products are tested and comply with ASTM (American Society for Testing and Materials) standards and regulations.

Only Salisbury can provide the complete list of Personal Protective Equipment required to protect workers against electrical hazards as defined by OSHA Regulations and the NFPA 70E Standard for Electrical Safety in the Workplace.

Salisbury is the world leader in Electrical Safety PPE and live line tools. For over 150 years, our products have helped protect electrical workers from the hazards of their job.

SALISBURY HAS YOU COVERED, FROM HEAD TO TOE.



SALISBURY is a Platinum Level Training Partner

DID YOU KNOW?

- 3 of OSHA's top 10 most frequently cited standards are electrical
- 97% of electricians have been shocked or injured on the job.
- Every 30 minutes during the work day, a worker suffers an electrically induced injury that requires time off the job for recovery.
- Over the last ten years, more than 46,000 workers have been injured from on-the-job electrical hazards.
- Medical costs for severe electrical burns can exceed \$4M per person.
- Work-related injuries can cost businesses well over \$30M in fines, medical costs, litigation, lost business and equipment costs.

HAVE SALISBURY ASSESSMENT SOLUTIONS WORK FOR YOU.

Contact your local Salisbury representative or visit ArcSafety.com and request a FREE quote to get started.



SALISBURY ASSESSMENT SOLUTIONS (SAS)



SERVICES

Salisbury Assessment Solutions (SAS) provides a full range of services to ensure your compliance with NFPA 70E and ASTM F18 standards as well as OSHA government regulations. Our goal is to assist you in the process of creating, implementing and maintaining an electrical safety program.

Keeping your employees safe involves a thorough assessment of your facility, its hazards and potential risk levels. The purpose of an Arc Flash Risk Assessment is to determine how much danger is present and what electrical personal protective equipment (PPE) is required to protect your workers.

An electrical safety program audit can provide the baseline on what your electrical safety program needs to meet the NFPA 70E, ASTM F18 standards and OSHA regulations. Results of the audit allow you to create goals for the future state or development of your program. SAS can support and guide you toward meeting those goals through the numerous additional services offered. We can offer all of the tools you need to achieve the defined goals of your electrical safety program.



SAFETY TRAINING

Our training offerings include NFPA 70E and OSHA compliance, certification for electrical worker qualification, PPE training, electrical safe work practices and more. Our seminars, conferences and trade shows also provide additional learning opportunities. Our goal is to provide ongoing and continuous learning opportunities for you and your employees to ensure the safest possible working environment.



RESOURCES

Salisbury Assessment Solutions provides a full range of services, training opportunities and resources for safety professionals seeking to create, implement and maintain a written electrical safety program. We strive to provide a community of safety leaders with relevant news, information and resources.

Our goal is to support you with the knowledge, tools and services you need to lead your team to complete electrical safety compliance. Available resources include videos, articles, news, literature and more.



EDUCATION

Salisbury Assessment Solutions offers a wide range of educational opportunities. We invite you to attend our training sessions, regional seminars and trade shows to learn more about electrical safety and work practices. Our goal is to educate safety leaders and electrical professionals to ensure safe work practices are understood and implemented as well as keeping up with all the very latest changes regarding the many electrical standards.



SAS IS YOUR SINGLE SOURCE FOR ELECTRICAL SAFETY PROGRAM SUPPORT AND COMPLIANCE

To learn more about electrical safety, news and upcoming events visit www.arcsafety.com

COMMITTED TO SAFETY

Salisbury by Honeywell is the world leader in electrical safety PPE. For over 160 years, our products and services have helped keep electrical workers safe on the job. Our protective clothing and tools save lives by enabling electrical workers to operate safely in hazardous conditions.

Hundreds of deaths and thousands of injuries occur each year due to shock and arc flash. Almost all of these tragic events are preventable. The NFPA 70E Standard for Electrical Safety in the Workplace provides guidelines and principles to follow to ensure worker and workplace safety. NFPA 70E is the guideline for compliance with OSHA 1910 Subpart S and OSHA 1926 Subpart K.

OSHA takes electrical safety seriously with nearly 100 standards that are deemed necessary for the practical safeguarding of employees in their workplaces. Of OSHA's top 10 list of most frequently cited violations, 3 of the standards are electrical.

We are committed to your protection, and that means more than head to toe personal protective equipment, or PPE. It means a safer workplace that mitigates risk.

It also means expert training, engineering services, safety audits and a complete electrical safety program for your workplace that ensures your compliance with OSHA, ASTM and NFPA 70E standards and regulations.

Salisbury Assessment Solutions (SAS) offers a team of electrical engineers and safety experts offering individualized services to meet your needs for electrical safety compliance and to help you achieve your electrical safety program goals.

SAS offers electrical hazard risk assessments, arc flash risk assessments, compliance support, electrical engineering, assistance and support with written electrical safety programs and electrical training. SAS is a customized service that can meet the unique needs of each customer.

No matter what stage in the process of developing a safe and compliant workplace you are in, SAS can help.



SALISBURY ASSESSMENT SOLUTIONS AVAILABLE OFFERINGS

- Arc Flash Risk Assessments
- Electrical Hazard Risk Assessments
- Electrical Engineering
- Written Electrical Safety Program Assistance & Support
- Thermography
- Assistance with Personal Protective Equipment Selection
- NFPA 70E Compliance Support

ARC FLASH RISK ASSESSMENT

An arc flash is an explosion of electrical energy that can cause substantial damage, injury and death. Analyzing the arc flash hazards is critical to the worker and workplace safety. NFPA 70E calls for an arc flash hazard analysis and risk assessment procedure to maintain a safe workplace.

An arc flash risk assessment, per NFPA 70E, is a study investigating a worker's potential exposure to arc flash energy. This is conducted for the purpose of injury prevention as well as the confirmation of safe work practices. The determination of the arc flash boundaries and the appropriate levels of personal protective equipment (PPE) needed are critical deliverables of an arc flash risk assessment.

There are three steps to completing an arc flash hazard analysis as outlined by NFPA 70E Article 130.5 (2015 Edition):

- 1. Arc Flash Boundary** - When an arc flash hazard exists, distance a person can receive a 2nd degree burn from an arc flash source is the arc flash boundary. This is noted with an arc flash label placed on the electrical equipment. Incident energy and arc flash boundary calculation methods are provided in Annex D.
- 2. PPE for Application** - Within an arc flash boundary, the amount of personal protective equipment (PPE) is based on either an incident energy analysis or Hazard/Risk Categories. Table H.3(b) in Annex H of the NFPA 70E offers information on selection of arc-rated clothing and other PPE.

When it comes to selecting Arc Flash PPE, only 1 of the following methods shall be used for the selection of PPE. (The results of an incident energy analysis to specify an arc flash PPE Category in Table 130.7(C)(16) shall not be permitted.)

- (1) Incident Energy Analysis Method.** The incident energy exposure level shall be based on the working distance of the employee's face and chest areas from a prospective arc source for the specific task to be performed. Arc-rated clothing and other PPE shall be used by the employee based on the incident energy exposure associated with the specific task. Recognizing that incident energy increases as the distance from the arc flash decreases, additional PPE shall be used for any parts of the body that are closer than the distance at which the incident energy was determined.

Informational Note: For information on estimating the incident energy, see Informative Annex D. For information on selection of arc-rated clothing and other PPE, see Table H.3(b) in Informative Annex H.

- (2) Arc Flash PPE Categories Method.** The requirements of 130.7(C)(15) and 130.7(C)(16) shall apply when the arc flash PPE category method is used for the selection of arc flash PPE.

- 3. Equipment Labeling** - Electrical equipment that is likely to require examination, adjustment, servicing or maintenance shall be field marked with a label containing the following:

- (1) Nominal system voltage
- (2) Arc flash boundary
- (3) At least one of the following:
 - a. Available incident energy and the corresponding working distance, or the arc flash PPE category in Table 130.7(C)(15)(A)(b) or Table 130.7(C)(15)(B) for the equipment, but not both
 - b. Minimum arc rating of clothing
 - c. Site-specific level of PPE

The process of data collection, calculation, analysis, PPE selection and labeling are critical and complex tasks. The best way to avoid compliance and regulation issues and protect your workers is to allow an experienced, qualified electrical engineering team complete the analysis and work with you on creating and maintaining an electrical safety program.

SAS has a highly trained team of experts that will work with you every step of the way toward an electrically safe workplace. SAS offers services that ensure your workplace is compliant and that your workers are protected.



SALISBURY ASSESSMENT SOLUTIONS (SAS)

ELECTRICAL HAZARD RISK ASSESSMENTS

Salisbury's Electrical Hazard Risk Assessment is a thorough data collection process that allows us to understand your site, its equipment and the specific needs within your facility. After the data collection has been completed, Salisbury will provide a gap analysis. The gap analysis will allow us to offer a complete site assessment that explains potential hazards and recommendations for improving your program. SAS will assist you every step of the way.

These electrical hazard risk assessments are especially important in electrical environments due to the risk of arc flash. A hazard risk assessment and the use of appropriate PPE is a requirement by OSHA 29 CFR 1910.132(d): (1) The employer shall assess the workplace to determine if hazards are present, or are likely to be present, which necessitate the use of personal protective equipment (PPE).

ELECTRICAL ENGINEERING

An unsafe environment puts your workers and electrical equipment at risk. Electrical incidents can result in injury, costly repairs, penalties and even death. Companies can protect their workers, equipment and their bottom line by hiring an electrical engineering team like Salisbury Assessment Solutions to analyze their equipment.

SAS begins by performing a short circuit analysis and time current coordination study to evaluate your equipment and the risks it presents to your workplace. SAS will analyze the data to provide engineered solutions to improve the safety and efficiency of your electrical system.

Reliable equipment creates a safer more efficient workplace and lowers operating costs. SAS has licensed electrical engineers who can find ways to make your electrical system safer and more efficient.

ASSISTANCE WITH PERSONAL PROTECTIVE EQUIPMENT SELECTION

The arc flash risk assessment allows for calculation of Arc Flash Incident Energy levels (AFIE). The arc flash PPE categories (1 - Dangerous) determine the amount of protective clothing and personal protective equipment. Table 130.7(C)(16) in the NFPA 70E carefully outlines the requirements for each category.

Salisbury is the world leader in electrical safety PPE. Our SAS team understands the requirements and can help you with all aspects of PPE including:

- PPE Selection - SAS and the Salisbury team are experts in electrical PPE and can assist and ensure the proper electrical PPE is selected.
- Testing, Care & Maintenance – Helping you understand the equipment you need and how to care for it. PPE generally requires periodic testing and a maintenance plan for each piece to ensure that it will properly protect the worker.
- Electrical Safety Training– PPE should be inspected prior to each use and tested regularly. SAS can educate your staff on PPE testing and how to use their PPE.



WRITTEN ELECTRICAL SAFETY PROGRAM ASSISTANCE & SUPPORT

SAS has a dedicated team to assist you in developing and defining a corporate electrical safety program for your organization. Our goal is to help you establish a program that is manageable and enforceable so that you can ensure company-wide compliance as well as consistency in regards to safety across your entire business. Whether starting from scratch or looking to refresh your existing program, SAS can help.

THERMOGRAPHY

All electrical equipment is rated based on the maximum temperature that each component can safely be operated. As we know, electrical current flowing through any conductor or component produces heat and since the amount of heat produced varies, the ability of the conductor or component to dissipate that heat into the ambient environment is paramount. Electrical components operating at elevated temperatures will cause accelerated deterioration of both the component and the insulation protecting the component. Thermographic scanning of electrical components can identify these elevated temperatures and indicate the necessity for corrective action before a failure.

Thermography uses infrared cameras to measure temperature or excessive heat build-up. This method is not only accurate, but cost-effective and noninvasive. Maintenance personnel and engineers have long used thermography as it is very beneficial in detecting loose connections, damaged or overloaded components, and weak or poor wiring. This routine inspections and reporting can save a company from having to deal with emergency situations where equipment fails and production comes to a halt.

By combining your on-site data collection (done during the arc flash risk assessment) and thermal imaging, your costs per service are reduced as the panels only need to be accessed one time.

NFPA 70E COMPLIANCE SUPPORT

SAS has a staff of highly experienced loss control and risk managers. They can assist you in avoiding OSHA fines and citations. If you have already been cited or are involved in a worker's compensation claim, the SAS staff can assist you in meeting all requirements to help mitigate penalties and reduce possible costs on claims.

SAS is here to work with you to prevent injury and penalty by helping you establish and maintain a complete electrical safety program.

NFPA 70E DEFINES A QUALIFIED PERSON AS FOLLOWS:

One who has skills and knowledge related to the construction and operation of the electrical equipment and installations and has received safety training to recognize and avoid the hazards involved.

NFPA 70E Article 110.6(D)(1)

- (a) Such persons shall also be familiar with the proper use of the special precautionary techniques, personal protective equipment, including arc-flash, insulating and shielding materials, insulated tools and test equipment. A person can be considered qualified with respect to certain equipment and methods but still be unqualified for others.
- (b) Such persons permitted to work within the Limited Approach Boundary of exposed energized electrical conductors and circuit parts operating at 50 volts or more shall, at a minimum, be additionally trained in all of the following:
 - (1) The skills and techniques necessary to distinguish exposed energized electrical conductors and circuit parts from other parts of electrical equipment
 - (2) The skills and techniques necessary to determine the nominal voltage of exposed energized electrical conductors and circuit parts
 - (3) The approach distances specified in Table 130.2(C) and the corresponding voltages to which the qualified person will be exposed
 - (4) The decision-making process necessary to determine the degree and extent of the hazard and the personal protective equipment and job planning necessary to perform the task safely
- (c) An employee who is undergoing on-the-job training and who, in the course of such training, has demonstrated an ability to perform duties safely at his or her level of training and who is under the direct supervision of a qualified person shall be considered to be a qualified person for the performance of those duties.
- (d) Tasks that are performed less often than once per year shall require retraining before the performance of the work practices involved.
- (e) Employees shall be trained to select an appropriate voltage detector and shall demonstrate how to use a device to verify the absence of voltage, including interpreting indications provided by the device. The training shall include information that enables the employee to understand all limitations of each specific voltage detector that may be used.

NOT SURE YOU NEED SAS?

Look over our evaluation to see if SAS is right for you at ArcSafety.com.

Get a free quote and learn more about electrical safety at www.arcsafety.com



SALISBURY ASSESSMENT SOLUTIONS (SAS)

ARC FLASH LABELS PER NFPA 70E 130.5

* ARE YOUR LABELS UP TO DATE?

NFPA 70E requires an updates to your study every five years, or when there is a major modification to your distribution system.

This would include updating labels to the current standard. Please see NFPA 70 2015 for additional information or contact Salisbury.

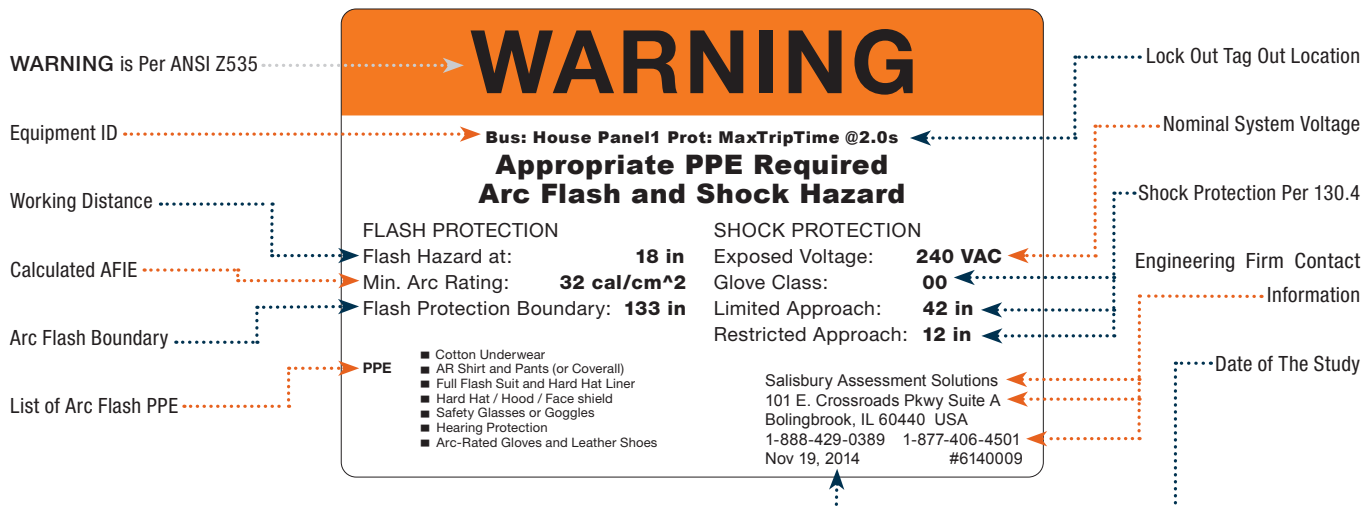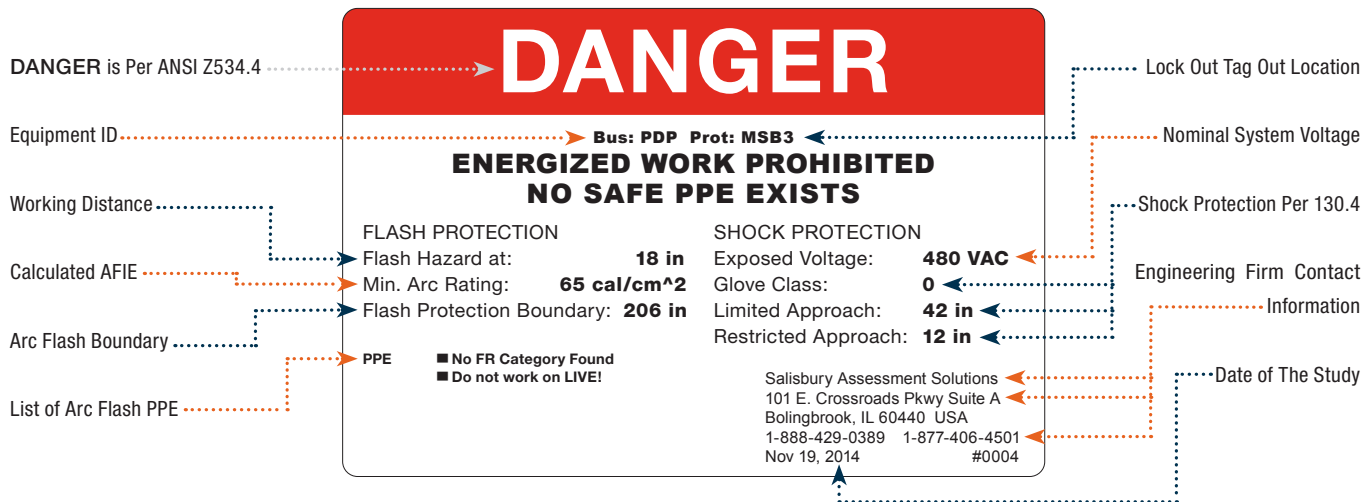

* AFIE - Arc flash incident energy (quantity of heat produced by an arc flash)



ON-SITE TRAINING

An essential element of any electrical safety program is professional training. When employers invest in continuous education for their employees, the result is a safer workplace. Salisbury Assessment Solutions offers on-site seminars to develop and enhance employee knowledge and confidence levels.

Companies that have invested in Salisbury's educational trainings and seminars realize the benefits in having a workforce where employees are educated to better understand codes, standards, regulations and safe work practices.

Electrical safety courses are available for both qualified and unqualified electrical workers. Courses are also available on the selection and maintenance of PPE. SAS has expert trainers with the credentials and industry knowledge to provide training that ensures a safe workplace.

ARC FLASH AND SHOCK HAZARD FOR NON-MAINTENANCE PERSONNEL

2 HOURS – AFT1002

The purpose of this session is to provide training on NFPA 70E Article 130. This training is for personnel who are required to function near or interface with electrical equipment but are not qualified to be within the approach boundaries specified in NFPA 70E.

ARC FLASH AND SHOCK HAZARD FOR MAINTENANCE PERSONNEL

4 HOURS – AFT1004

The purpose of this session is to provide training on NFPA 70E Article 130. This training is for personnel who are required to examine, adjust, service or maintain electrical equipment while it is energized and meet the standards required for qualified personnel as defined in NFPA 70E.

OSHA 10-HOUR FOR THE ELECTRICAL INDUSTRY*

10 HOURS – OSHA10

The purpose of this multi-day session is to provide a safer work environment and protect electrical workers by keeping them informed about OSHA's latest standards, regulations and best practices. This 10-hour program is OSHA's basic safety outreach class and is designed to introduce workers to a variety of general industry guidelines and requirements with an emphasis placed on those sections of 29 CFR 1910 which are appropriate for workers who work on or near electrical power systems. After completion, participants will receive an OSHA 10 hour card.

** The OSHA 10 card may be a requirement of your facility or one of your customer's facilities (i.e. steel mills, utility power plants, heavy industrials, etc.)*

WHAT YOU WILL LEARN

SAS TRAININGS COVER A VARIETY OF TOPICS

- How to keep one-lines up to date
- What is involved in performing an engineering study
- The differences of doing an arc flash risk assessment versus using the NFPA 70E tables
- Gain knowledge on how mitigation can reduce your arc flash PPE category levels to 1 - 2
- When existing arc flash labels need to be replaced
- How long an arc flash risk assessment is valid
- What to consider when adding a circuit or service entrance
- How to perform an arc flash risk assessment in accordance with the latest codes and standards
- And much more.....

REGIONAL TRAININGS

Trainings can be hosted at your location, at another local facility of your choosing or at one of the following Honeywell training centers:

Albuquerque, NM
Anniston, AL
Cincinnati, OH
Colorado Springs, CO
Fombell, PA
Greer, SC
Kansas City, MO
Minneapolis, MN
Phoenix, AZ

Allentown, PA
Bolingbrook, IL
Clearwater, FL
Columbia, MD
Fresno, CA
Houston, TX
Memphis, TN
Morristown, NJ
Plymouth, MN

** If your location does not appear above, please contact us for activity in your area.*

*** All electrical safety trainings are also available in Spanish.*



FACE, HEAD & NECK PROTECTION



SALISBURY

by Honeywell

AS2000HAT PROTECTIVE FACE SHIELD

12-20 CAL/CM² WEIGHT BALANCING ARC FLASH PROTECTION FACE SHIELD

AS2000HAT - Salisbury by Honeywell's NEW revolutionary AS2000HAT is a Weight Balancing Arc Flash Protection Face Shield. The shield stows in a balanced, compact position, centered over the top of the hard hat when not in use. The AS2000HAT has an ATPV rating of 20 cal/cm² and utilizes nanotechnology to provide a clearer, more transparent window for improved visibility. The face shield unit includes ventilation ribs that allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort.

AS1200HAT & AS2000HAT SERIES

7.5" x 20" Viewing area
Extra light tint
.06" Thick
Absorbs >99.9% of harmful UV radiation
Resistant to fogging
Meets current ANSI Z87.1 and is CSA standard compliant
Tested to ASTM F2178 specifications



AS2000HAT-CLR

AS1200HAT - Salisbury by Honeywell's revolutionary AS1200HAT is a Weight Balancing Arc Flash Protection Face Shield, that stows in a balanced, compact position, centered over the top of the hard hat when not needed. The AS1200HAT has an ATPV rating of 12 cal/cm² and utilizes nanotechnology to provide a more transparent window for improved visibility. The shield/window is designed to be easily replaced without tools. The face shield unit includes ventilation ribs that allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.


Features and Benefits of Premium Poly Carbonate face shields.

Anti-fog and anti-scratch resistant coating
Improved outdoor exposure
Increased warp resistance
Enhanced color recognition



AS2000

AS2000FB

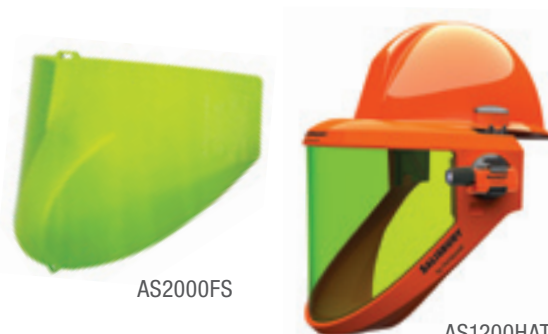

AS2000FS

AS1200HAT

CAT. NO.	DESCRIPTION
AS2000HAT	20 cal/cm ² , arc flash protection face shield unit w/SA79R03 hard hat
AS2000HAT-CLR	20 cal/cm ² , arc flash protection face shield unit w/SA79R03 hard hat and transparent chin guard
AS2000	20 cal/cm ² , arc flash protection face shield unit
AS2000FB	20 cal/cm ² , arc flash protection face shield unit for full brim hard hats
AS2000FS	Replacement face shield/window
AS1200HAT	12 cal/cm ² weight balancing arc flash protection face shield unit w/hard hat
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard
AS1200PPC	12 cal/cm ² weight balancing arc flash protection face shield unit. Made of Premium Polycarbonate with permanent anti-fog/anti-scratch coating
AS1200CLR-PPC	12 cal/cm ² weight balancing arc flash protection face shield unit with transparent chin protector. Made of Premium Polycarbonate with permanent anti-fog/anti-scratch coating
AS1200	12 cal/cm ² weight balancing arc flash protection face shield unit.



NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.

NFPA 70E: AN ARC RATED HOOD SHALL BE USED WHEN THE ANTICIPATED INCIDENT ENERGY EXPOSURE EXCEEDS 12 CAL/CM².

AS1200 UNIVERSAL FIT PROTECTIVE FACE SHIELD FOR FULL OR FRONT BRIM - HRC 2

12 CAL/CM²

UNIVERSAL FIT AS1200FB & AS1200U - Salisbury by Honeywell's NEW revolutionary AS1200FB and AS1200U are weight balancing arc flash protection face shield that fit ALL popular full brim (AS1200FB) or front brim (AS1200U) hard hats.

The AS1200FB and AS1200U assembly attaches to the full or front brim hard hat with an elastomeric band that secures the bracket onto the brim. All parts are dielectric and specifically designed for arc flash protection.

The AS1200FB and AS1200U have an ATPV rating of 12 cal/cm² (NFPA 70E PPE category 2) and utilizes nanotechnology and an anti-fog coating, to provide a clearer, more transparent window for improved visibility. The face shield unit includes an upper bracket ventilation feature that allows a natural air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.

OPTIONAL ACCESSORIES

TRANSPARENT CHIN GUARD

The Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly-transparent chin guard allows improved awareness and greater safety.

AS1200FB with
Full Brim Hard Hat
& FLKIT



REVOLUTIONARY AS1200FB & AS1200U


- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications
- Unique weight balancing design
- Optional task light feature
- Replaceable window, no tools required
- AS1200FB fits all popular full brim hard hats
- AS1200U fits all popular front brim hard hats
- Ventilated design
- Adjustable pivot tension
- Can be easily removed from the hard hat
- One hand operation



IMPROVED NOW 35 LUMENS



AFLENS



AS1200FS-FB



ASFL



FLCLIP (1)



AS12CLIP



FLKIT

AFLENSU



SALISBURY ADVANTAGE ANTI-FOG LENS



AS1200HAT-CLR

If you need it, request it. Call customer service if you need something not seen here.

PROTECTIVE FACE SHIELD OPTIONAL ACCESSORIES

AFLENS ANTI-FOG INNER LENS

- Includes an air spaced design that decreases fogging
- Natural convection air flow design also helps minimize fogging
- Shield meets the ASTM requirements for an Anti-Fog Lens

ASFL FLAME RESISTANT ATTACHABLE TASK LIGHTS

The arc tested ASFL arc rated task light features a high intensity long lasting white LED lamp with an overall brightness of 35 lumens. From a 24 inch distance, the beam is approximately 6-7 inch in diameter. The high intensity illumination is very useful when working up close. 2 AAA batteries provide 14-15 hours of high brightness.

NOTE: The AS1200HAT can hold 2 ASFL task lights. The FLKIT only contains 1 task light and 1 clip.

AS12CLR TRANSPARENT CHIN GUARD

The AS12CLR Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly transparent chin guard allows improved awareness and greater safety.

CAT. NO.	DESCRIPTION
AS1200	Weight balancing arc flash protection face shield unit
AS1200FB	12 cal/cm ² , Universal fit, arc flash protection face shield unit for full brim hard hats
AS120RG-FB	Orange chin guard for AS1200FB
AS12CLR-FB	Transparent chin guard for AS1200 series full brim
AS1200FS-FB	Replacement face shield/window 12 cal/cm ² for AS1200FB full brim
AS1200U	12 cal/cm ² , Universal fit, arc flash protection face shield unit for front brim hard hats
AS1200FS	Replacement window for AS1200 series front brim
AS1200HAT	Weight balancing arc flash protection face shield unit w/ hard hat
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard
AFLENS	Anti-fog inner lens
ASFL	Arc rated attachable task light (1)
AS12CLIP	Replacement clips set (2) for AS1200HAT shield
FLCLIP	Attachable task light clip (1)
FLKIT	Attachable task light (1) & FLCLIP
AS12CLR	Transparent chin guard
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®

AS12CLR



NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.

NFPA 70E: AN ARC RATED HOOD SHALL BE USED WHEN THE ANTICIPATED INCIDENT ENERGY EXPOSURE EXCEEDS 12 CAL/CM².

AS1000 SERIES PROTECTIVE FACE SHIELD UNITS & ACCESSORIES - PPE CATEGORY 2

10 CAL/CM²

AS1000 SERIES

10 cal/cm² ATPV rating when used with the included chin cup

7.5" x 20" Viewing area

Extra light tint

Face shield made from Standard Poly Carbonate

.06" Thick

Absorbs >99.9% of harmful UV radiation

Resistant to fogging

Shield meets current ANSI Z87.1 and tested to ASTM F2178 specifications

Made with standard poly-carbonate material



AS1000HAT



AS1000



AS1000FB



ASBAG

CAT. NO.	DESCRIPTION
AS1000	AS1000FS Shield w/ integrated chin protector & slotted ASSLB BRACKET. Fits most slotted front brim hard hats.
AS1000U	AS1000FS Shield w/ integrated chin protector & universal BRACKET. Fits most front brim hard hats.
AS1000FB	AS1000FS Shield w/ integrated chin protector & universal FB BRACKET. Fits most full brim hard hats.
AS1000HAT	AS1000 w/ SA79R front brim hard hat.
ASBAG	Large face shield storage bag w/ drawstring closure with fleece lined interior (21"L X 19"W X 14"H).
SA79*	Peak front brim hard hat with rain trough, 4-Point nylon suspension, pin-lock adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003
SA79R*	Peak front brim hard hat with rain trough, 4-Point nylon suspension, ratcheting adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003

4-POINT RATCHETING REPLACEMENT NYLON SUSPENSION




REPLACEMENT ARC FLASH PROTECTION LENSES

8 - 100 CAL/CM²

UPGRADE YOUR PRO-HOOD® LENS:

IF YOUR FH31RB, FH40GY, OR FH55GY LENS HAS MODEL # IM22-ARCAF6FL-2, YOU SHOULD UPGRADE TODAY TO THE 4000 CLEARER LENS FOR GREATER VISIBILITY.

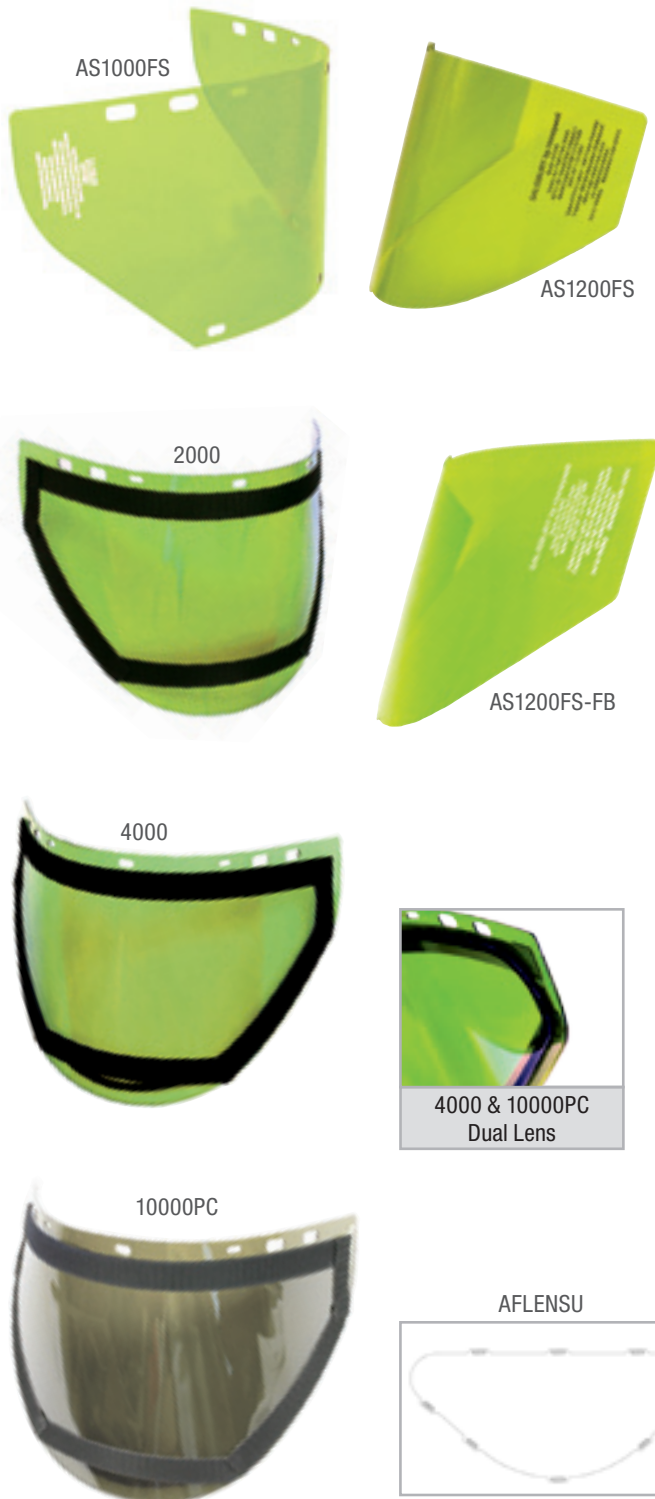

AS1000/AS1200 & PRO-HOOD®

8 cal/cm² to 100 cal/cm² ATPV ratings
 7.5" x 20" Viewing area for replacement AS1000 protective shield lenses
 10" x 20" Viewing area for replacement PRO-HOOD® lenses
 4000V and 10000V lenses have two layers of protection
 Extra light tint
 .06" Thick
 Absorbs >99.9% of harmful UV radiation
 Resistant to fogging
 Meets current ANSI Z87.1 and tested to ASTM F2178 specifications

AFLENSU - The universal inner lens is a field installed anti-fog lens for PRO-HOOD® arc flash protective switching hoods. Installs quickly without tools to the inside of the PRO-HOOD® face shield and can be removed for cleaning or replacement.

CAT. NO.	DESCRIPTION
AS1000PC	Replacement face shield for AS1000HAT, AS1000FB and AS1000U. Used with the ASSLB, FBBrACKET, or BRACKET brackets. Includes chin guard.
AS1200FS	Replacement window for AS1200HAT, 12 cal/cm ² .
AS1200FS-FB AS1200FB	Replacement face shield/window 12 cal/cm ² for full brim
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®.
2000	Replacement lens, with hook & pile attachment, for OLDER DESIGN 8 cal/cm ² to 20 cal/cm ² PRO-HOOD®. Single layer lens. Used with the ASSLB, FBBrACKET, or BRACKET brackets. Made from Standard Poly-Carbonate.
4000	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 40 cal/cm ² PRO-HOOD®. Dual layer lens. Used with the ASSLB, FBBrACKET, or BRACKET brackets. Premium Poly-Carbonate.
10000PC	Replacement lens, with hook & pile attachment, for 75 cal/cm ² to 100 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Used with the ASSLB, FBBrACKET, or BRACKET brackets. Premium Poly-Carbonate.

REPLACEMENT BRACKETS, PROTECTIVE NETS & SAFETY GLASSES

REPLACEMENT BRACKETS

CAT. NO.	DESCRIPTION
BRACKET	Universal dielectric hard hat bracket. Used with front brim hard hats.
FBBRACKET	Universal dielectric hard hat bracket. Used with full brim hard hats.
ASSLB	Dielectric bracket, fits slotted front brim hard hats. Used with all AS1000 Series lenses.

SALISBURY'S FIRE RESISTANT HAIRNET AND BEARDNET give added protection in any industry that requires the worker to wear a hairnet or beardnet. The hairnet and beardnet have an ATPV rating of 2.4 cal/cm² and are available in gray. These items are made with washable 1.7 oz/yd² (58 g/m²) woven Nomex[®] fabric and meets current ASTM F1959 standards.

CAT. NO.	DESCRIPTION
HN-1	Arc Rated protective hairnet, 2.4 cal/cm ² 1.7 oz/yd ² (58 g/m ²) woven Nomex [®]
BN-1	Arc Rated protective beardnet, 2.4 cal/cm ² 1.7 oz/yd ² (58 g/m ²) woven Nomex [®]

SAFETY GLASSES are anti-fogging, anti-scratch and anti-static with 99.9% UV protection. These glasses meet current ANSI Z87.1, 2003 and CSA Z94.3* standards.

*The CSA Z94.3 standard applies to eye and face protectors used in all occupational and educational operations or processes involving hazards to the eyes or face.

CAT. NO.	DESCRIPTION
S3200	Clear lens, Dark gray frame
TS56505GRY	Clear lens, gray frame
TS56505GRYA	Amber lens, gray frame
TS56505GRYS	Smoke lens, gray frame



ARC FLASH PROTECTION AS1000HAT & AFHOOD KIT



The **AS1000HAT, AS1200HAT & AS2000HAT KITS** make your Personal Protective Equipment purchasing even easier. These convenient kits contain a AS1000HAT or AS1200HAT or AS2000HAT, a 10 cal/cm² or 12 cal/cm², or 20 cal/cm² ATPV rated AFHOOD, safety glasses and an ASBAG.

The AS2000HAT has an ATPV rating of 20 cal/cm² and utilizes nanotechnology to provide a clearer, more transparent window for improved visibility. The AS1200HAT has an ATPV rating of 12 cal/cm² and includes ventilation ribs that allow a natural convection air flow through the top of the face shield. The AS1000HAT has an ATPV rating of 10 cal/cm². The lens provides a 7.5" x 20" viewing area with an extra light tint.

The SKA kits are an ideal kit to use with PPE programs that exceed 8 cal/cm² or with 8 cal/cm² to 12 cal/cm². ATPV rated coveralls and coats.

NOTE: DUE TO AS1000HAT ATPV RATING OF 10 CAL/CM², PROTECTION GREATER THAN 10 CAL/CM² CANNOT BE ACHIEVED.
DUE TO AS1200HAT ATPV RATING OF 12 CAL/CM², PROTECTION GREATER THAN 12 CAL/CM² CANNOT BE ACHIEVED.



SKA12

CAT. NO.	DESCRIPTION
SKA10	ATPV 10 cal/cm ² Kit - 10 cal/cm ² AFHOOD With 10 cal/cm ² AS1000HAT, ANSI rated safety glasses and ASBAG.
SKA12	ATPV 12 cal/cm ² Kit - 15 cal/cm ² AFHOOD With 12 cal/cm ² AS1200HAT, ANSI rated safety glasses and ASBAG.
SKA20	ATPV 20 cal/cm ² Kit - 20 cal/cm ² AFHOOD With 20 cal/cm ² AS2000HAT, ANSI rated safety glasses and ASBAG.



NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.

NFPA 70E: AN ARC RATED HOOD SHALL BE USED WHEN THE ANTICIPATED INCIDENT ENERGY EXPOSURE EXCEEDS 12 CAL/CM².



IMPORTANT: THE MAXIMUM ARC FLASH PROTECTION OF A KIT IS EQUAL TO THE LOWEST CAL/CM² RATING OF ANY COMPONENT IN THE SELECTED SAFETY KIT.



SKA10

ARC FLASH PROTECTION HOODS - AFHOODS (BALACLAVA)

10 - 28 CAL/CM²

SALISBURY'S ARC FLASH RATED HOODS (Balacava) create 360° head and neck protection from arc flash dangers when used with a AS1000, AS1200 or AS2000 Series Face Shield/Hard Hat/Chin Cup Unit. Each Arc Flash Hood is made from two layers of rib knit material and has an elastic face opening that maintains its shape and size.

The AFHOOD10 has an ATPV rating of 10 cal/cm². The AFHOOD15 has an ATPV rating of 15 cal/cm². The AFHOOD20 has an ATPV rating of 20 cal/cm². Both the AFHOOD28FF and the AFHOOD28EO have an ATPV rating of 28 cal/cm².

CAUTION: Arc Flash Hoods must be worn in combination with a face shield in order to comply with the requirements of NFPA 70E and will protect 360° inside the arc flash boundary.

CAT. NO.	DESCRIPTION
AFHOOD10	10 cal/cm ² Protection
AFHOOD15	15 cal/cm ² Protection
AFHOOD20	20 cal/cm ² Protection
AFHOOD28FF	28 cal/cm ² Protection
AFHOOD28EO	28 cal/cm ² Protection, 2-eye hood



AFHOOD15



AFHOOD10



AFHOOD20



AFHOOD28EO

PRO-WEAR® LIFT FRONT HOOD

40 CAL/CM² HRC 4

SALISBURY BY HONEYWELL'S LIFT FRONT HOOD IS A LIGHTER, MORE COMFORTABLE ARC FLASH HOOD THAT PROVIDES USERS WITH INCREASED VISIBILITY, BREATHABILITY AND SAFETY.

Visibility

- Shield and chin guard offer an additional 45 degrees of vertical view over standard hoods.
- Vertical peripheral vision field increases by 109% which allows for a clearer view of surroundings.
- Contoured lens naturally extends range of peripheral vision giving user a greater outward visibility and more access to natural light.
- Allows for use of task lights to add much needed convenience lighting in dark work places.

Comfort

- Contains 60% less fabric weight than standard hoods which makes it lighter and more comfortable to wear.
- Reduction in fabric allows for more natural head movement and eliminates the need for frequent hood adjustments due to shifts in the excess fabric.

Ventilation & Breathability

- Industrial design creates a natural ventilation system beneath the brim of the hard hat.
- Ventilated bracket design allows carbon dioxide and heat to escape as it rises from the body.



A REVOLUTIONARY HYBRID IN ARC FLASH PROTECTION INTRODUCING THE NEXT GENERATION IN ARC FLASH HEAD PROTECTION.

Salisbury by Honeywell's revolutionary Lift Front Hood is a unique hybrid combination hood that is lighter and more comfortable to wear than a standard arc flash hood. The combination of a wider face shield and transparent chin guard more than doubles the vertical peripheral vision one would experience while wearing a standard hood and offers the user greater outward visibility and access to natural light.

The Lift Front Hood is comprised of 60% less fabric than standard arc flash hoods. This reduction in fabric allows for more natural head movement and eliminates the need for frequent hood adjustments due to shifts in the excess fabric.

In addition to increased visibility and comfort, the Lift Front Hood offers an extra level of safety protection for the user as it allows for increased breathability. The industrial bracket design creates a natural ventilation system that allows carbon dioxide and heat to escape as it rises from the body.

Lift Front Hood's visibility, fabric weight, breathability and lifting features make it a pioneer in the fusion of comfort and safety in arc flash protection products and Salisbury by Honeywell is proud to take the lead in introducing this revolutionary product to the marketplace.

FEATURES AND BENEFITS OF PREMIUM POLY-CARBONATE FACE SHIELDS

- Anti-fog and anti-scratch resistant coating
- Increased warp resistance
- Improved outdoor exposure
- Enhanced color recognition

Breathability matters. According to OSHA, workers are at greater risk of heat stress while using bulky or non-breathable protective clothing and equipment.

If the body cannot get rid of excess heat, it will store it. When this happens, the body's core temperature rises and the heart rate increases. As the body continues to store heat, the person begins to lose concentration and has difficulty focusing on a task, may become irritable or sick, and often loses the desire to drink. Exposure to heat can also increase the risk of injuries because of sweaty palms, lens fogging and dizziness.

CAT NO.	DESCRIPTION
LFH40	40 cal, 2 layer, 9oz/yd ² over 9oz/yd ²
LFH40-FL	40 cal, 2 layer, 9oz/yd ² over 9oz/yd ² includes two ASFL and two FLCLIP
LFH40PLT	40 cal Premium Light Weight, 2 layer, 5oz/yd ² over 6oz/yd ²
LFH40PLT-FL	40 cal Premium Light Weight, 2 layer, 5oz/yd ² over 6oz/yd ² includes two ASFL and two FLCLIP

ACCESSORIES

ASFL	Attachable Task Light (1)
AS12CLIP	Replacement Clips Set (2)
FLCLIP	Attachable Task Light Clip (1)
FLKIT	Attachable Task Light (1) & FLCLIP



FLKIT



ASFL



FLCLIP (1)



IMPROVED NOW 35 LUMENS



ARC FLASH PRO-AIR™ AIR FLOW HOOD SYSTEM

8-100 CAL/CM²

SALISBURY PRO-AIR™ AIR FLOW HOOD SYSTEM

is integrated with Salisbury's PRO-HOOD® Arc Flash Protection Hood. Now, all Salisbury PRO-HOOD® Arc Flash Protection Hoods are available with an optional integrated cooling system. This newest addition to the PRO-AIR™ line of products provides additional air flow and cools the worker. This unit is excellent in warm conditions or confined spaces. The easy to wear system is light weight, compact and easy to use. The system is designed to provide the worker with approximately 80cfm of air flow throughout the breathing zone. The unit is powered by 8 AA batteries and is designed to maintain a useful continuous life of up to 35hrs at 80cfm. The unit is non-filtered and is not considered a respirator.

CAT. NO.	DESCRIPTION
FH8BL-C	8 cal/cm ² Arc flash hood w/ air system
FH11BL-C	12 cal/cm ² Arc flash hood w/ air system
FH20BL-C*	20 cal/cm ² Arc flash hood w/ air system
FH31RB-C*	31 cal/cm ² Arc flash hood w/ air system
FH40GY-C*	40 cal/cm ² Arc flash hood w/ air system
LFH40*	NEW 40 cal/cm ² Arc flash lift front hood (pg.16)
LFH40PLT*	NEW 40 cal/cm ² Arc flash lift front hood (pg.17)
FH40PLT-C*	NEW 40 cal/cm ² , Arc flash hood w/ air system
FH55GY-C*	55 cal/cm ² Arc flash hood w/ air system
FH75GY-C*	75 cal/cm ² Arc flash hood w/ air system
FH100TW-C*	100 cal/cm ² Arc flash hood w/ air system

* Includes Premium Poly-Carbonate Faceshield

FH8BL-C



FH20BL-C



FH31RB-C



LFH40PLT
W/FLKIT



FH40PLT-C



FH40GY-C



FH55GY-C



LFH40
W/FLKIT

NOTE: UNITS PROVIDED WITH STANDARD U.S. TWO PRONG BLADE ELECTRICAL PLUGS. THE PLUGS ARE FOR USE IN NORTH AND CENTRAL AMERICA AND JAPAN. FOR ALL OTHER REQUIREMENTS, PLEASE CONTACT SALISBURY INTERNATIONAL CUSTOMER SERVICE.

PRO-WEAR® ARC FLASH PROTECTION CLOTHING & KITS



ALL PRO-WEAR® ARC FLASH PROTECTION CLOTHING KITS

MATERIAL WEIGHTS & SIZING

MATERIAL WEIGHT FOR ATPV RATINGS

ATPV Rating cal/cm ²	Material Weight oz./yd ²
8	7 oz./yd ² (237 g/m ²)
12	9 oz./yd ² (305 g/m ²)
20	13 oz./yd ² (441 g/m ²)
31	2 layers - 7 oz./yd ² (237 g/m ²) over 7 oz./yd ² (237 g/m ²)
40	2 layers - 9 oz./yd ² (305 g/m ²) over 9 oz./yd ² (305 g/m ²)
40-PLT	Approximately 30% lighter fabric weight than standard 40 calorie garment. 2 layers – 5 oz./yd ² (141.747 g/m ²) & 6 oz./yd ² (170.097 g/m ²)
55	2 layers - 13 oz./yd ² (441 g/m ²) & 13 oz./yd ²
75	3 layers - 13 oz./yd ² (441 g/m ²) over 9 oz./yd ² (305 g/m ²) over 7 oz./yd ² (237 g/m ²)
100	Fabric ensemble composed of six fabric layers as follows: 10 oz./yd ² , 8.0 oz./yd ² , & 4 layer quilt with a total quilt weight 10 oz./yd ² .

PRODUCT FEATURE

THE SALISBURY ADVANTAGE

LIGHTER MATERIAL MAKES ALL THE DIFFERENCE

THE SALISBURY **NEW** PREMIUM LIGHT WEIGHT 40 CAL/CM² PLT ARC FLASH MATERIAL MAKES WORKING MORE COMFORTABLE THAN EVER.

Salisbury by Honeywell's **NEW** Premium Light Weight 40 cal/cm² Arc Flash Protection Suit has a total fabric weight of 11 oz./yd². This is approximately 30% lighter than Salisbury's standard HRC 4 suit with a total fabric weight of 18.5 oz./yd². Keep cooler and improve worker comfort without compromising safety.

SALISBURY PRO-HOOD® ARC FLASH PROTECTION HOODS ARE ONE SIZE FITS ALL.

PRODUCT: COVERALL

in/cm (ACCA8, ACCA12, ACCA20)

Measurements in inches (maximum allowed)				
SIZE	A	B	D	E
Small	40/102	34/86	36/91	29/74
Medium	44/112	35/86	40/102	30/75
Large	48/122	36/91	44/112	30/79
XLarge	52/132	38/91	48/122	30/79
2XLarge	56/142	39/94	52/132	31/79
3XLarge	60/152	39/94	56/142	31/79
4XLarge	64/163	40/102	60/152	32/79
5XLarge	68/173	40/102	64/163	32/79
6XLarge	72/183	40/102	68/173	32/79

PRODUCT: COAT in/cm (ACC8, ACC12, ACC20),

(ACC31, ACC40, ACC40PLT, ACC55, ACC75, ACC100TW)

Measurements in inches (maximum allowed)			
SIZE	A	B	C
Small	44/112	35/89	32/81
Medium	48/122	36/91	32/81
Large	52/132	37/94	32/81
XLarge	56/142	38/97	32/81
2XLarge	60/152	39/99	32/81
3XLarge	64/163	40/102	32/81
4XLarge	68/173	40/102	32/81
5XLarge	72/183	40/102	32/81
6XLarge	76/193	40/102	32/81

PRODUCT: BIB OVERALL in/cm (ACB8, ACB12,

ACB20, ACB31, ACB40, ACB40PLT, ACB55)

Measurements in inches (maximum allowed)			
SIZE	D	E	F
Small	44/112	30/76	54/137
Medium	48/122	30/76	55/140
Large	52/132	30/76	56/142
XLarge	56/142	30/76	57/145
2XLarge	60/152	30/76	58/147
3XLarge	64/163	30/76	59/150
4XLarge	68/173	30/76	60/152
5XLarge	72/183	30/76	61/155
6XLarge	76/193	30/76	62/157

PRODUCT: OVERPANTS

in/cm (ACP8, ACP12, ACP20)

Measurements in inches (maximum allowed)		
SIZE	D	E
Small	38/97	30/76
Medium	42/107	30/76
Large	46/117	30/76
XLarge	50/127	30/76
2XLarge	54/137	30/76
3XLarge	58/147	30/76
4XLarge	62/157	30/76
5XLarge	66/168	30/76
6XLarge	70/178	30/76


PRODUCT: BIB OVERALL

in/cm (ACB75, ACB100TW)

Measurements in inches (maximum allowed)			
SIZE	D	E	F
Small	44/112	30/76	53/135
Medium	48/122	30/76	54/137
Large	52/132	30/76	55/140
XLarge	56/142	30/76	56/142
2XLarge	60/152	30/76	57/145
3XLarge	64/163	30/76	58/147
4XLarge	68/173	30/76	59/150
5XLarge	72/183	30/76	60/152
6XLarge	76/193	30/76	61/155

HOW TO MEASURE

- A Chest** - Measure across front from underarm to underarm
- B Sleeve** - Measure from center/back neck (base of collar) out to end of cuff
- C Length** - Measure from back of neck down to hem
- D Waist** - Measure from waist side seam to side seam (flares open)
- E Inseam** - Measure from mid crotch down to leg hem
- F Length** - Measure from top of bib down to pant hem

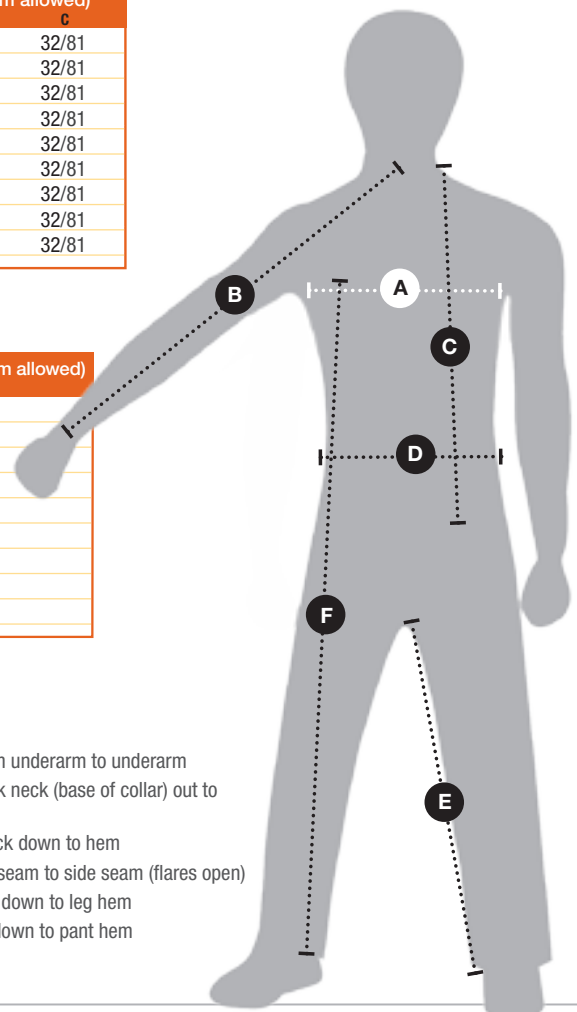

ALL PRO-WEAR® ARC FLASH PROTECTION CLOTHING KITS

QUICK REFERENCE CHARTS & INFORMATION

SALISBURY ADVANTAGE



CE MARKING

Salisbury PRO-WEAR® Arc Flash Protection Clothing and Salisbury PRO-HOOD® Arc Flash Protection Hoods that have the CE 0120 marked on the inner garment label has received the coveted CE certification. This Salisbury advantage is one more reason why Salisbury provides the best personal protective equipment available today.

CE MARKING ON A PRODUCT:

- Indicates that the product complies with the essential health and safety requirements of all applicable EU directives.
- A declaration by the manufacturer, its representative or the importer that those requirements have been met in full.
- A declaration that all conformity procedures have been completed. The product is allowed in the European market.

ALL PRO-WEAR® ARC FLASH PROTECTION CLOTHING

QUICK REFERENCE PRODUCT NUMBERING CHART

Salisbury CAT. NO.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE
SK8	S, M, L, XL, 2XL or 3XL	8	2
SKCA8*	S, M, L, XL, 2XL or 3XL	8	2
SK11	S, M, L, XL, 2XL or 3XL	12	2
SKCA11*	S, M, L, XL, 2XL or 3XL	12	2
SK20	S, M, L, XL, 2XL or 3XL	20	2
SK31	S, M, L, XL, 2XL or 3XL	31	3
SK40	S, M, L, XL, 2XL or 3XL	40	4
SK40PLT	S, M, L, XL, 2XL or 3XL	40	4
SK55	S, M, L, XL, 2XL or 3XL	55	4
SK75	S, M, L, XL, 2XL or 3XL	75	4
SK100	S, M, L, XL, 2XL or 3XL	100	4
Example:			
SK20	XL	20	2

SK20XL is a clothing kit with a rating of 20 cal/cm² that contains coat and bib overalls size extra large, hard hat, hood, safety glasses and storage bag.

LIGHTEST HRC 4 SUIT AVAILABLE

Keep cooler and improve worker comfort without compromising safety.



SALISBURY PRO-WEAR® Color Code

PPE Category

Clothing Description (Typical Number of clothing layers given in parentheses)

Minimum Arc Rating of PPE

Navy Blue	2	Arc rated long-sleeve shirt and pants or arc rated coverall plus arc rated face shield with a balaclava or switching hood (1 or 2)	8 cal/cm ²
Royal Blue	3	Arc rated long-sleeve shirt, pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	25 cal/cm ²
Gray / Khaki	4	Arc rated long-sleeve shirt and pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	40 cal/cm ²
Green	4	PLT Arc rated long-sleeve shirt and pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	40 cal/cm ²

PRO-HOOD® ARC FLASH PROTECTION HOOD

8 - 100 CAL/CM²

OPTIONAL INTEGRATED LIGHT WEIGHT AIR SYSTEM

SEE PAGE 18 FOR MORE INFORMATION

LIGHTER MATERIAL THAN EVER

40 CAL/CM² & 100 CAL/CM²

IMPROVED LENS CLARITY

31 CAL/CM², 40 CAL/CM² & 55 CAL/CM²

FH8BL-C



FH40GY



FH31RB



PRO-HOOD® ARC FLASH PROTECTION HOODS

8 cal/cm² to 100 cal/cm²* ATPV ratings

8 cal/cm² to 75 cal/cm²* Hoods are made from arc flash resistant material

100 cal/cm²* Hood is made from proprietary fabric blend

Sewn with Nomex® thread

Arc rated 10" x 20" anti-fogging replaceable lens

Slotted bracket

Hook and pile tabs to attach Salisbury's PRO-AIR™ belt mounted compact air system

One size fits all

Meet current ASTM F2178 and NFPA 70E standards and the flammability requirements for ASTM F1506

CAT. NO.	DESCRIPTION
FH8BL	8 cal/cm ² , Navy blue
FH11BL	12 cal/cm ² , Navy blue
FH20BL	20 cal/cm ² , Navy blue
FH31RB	31 cal/cm ² , Royal blue
FH40GY	40 cal/cm ² , Gray
LFH40	NEW 40 cal/cm ² Arc flash lift front hood (pg.17)
FH40PLT	NEW 40 cal/cm ² , Premium Light Weight, Green
FH55GY*	55 cal/cm ² , Gray
FH75GY*	75 cal/cm ² , Gray
FH100TW*	100 cal/cm ² , Khaki, TuffWeld®

Add suffix "-C" to include integrated air flow hood system.

NOTE: Garments that have received CE 1020 certification will be marked accordingly.

OPTIONAL: Universal Inner Anti-Fog Lens (see page 13 for more information)

OPTIONAL: Integrated Air Flow Hood System (see page 18 for more information)



FH40PLT



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

PRO-WEAR® FLASH PROTECTION COATS

8 - 100 CAL/CM²

**PREMIUM LIGHT WEIGHT 40 CAL/CM²
LIGHTEST MATERIAL IN THE INDUSTRY.**



ARC FLASH PROTECTION COATS

8 cal/cm² to 100 cal/cm²* ATPV ratings

8 cal/cm² to 75 cal/cm²* coats are made from arc flash resistant material

100 cal/cm²* coat is made from TuffWeld® and Q/9® material layers
Sewn with Nomex® thread

32" Long

Nomex® wristlets

Dual stage front closure with high temperature plastic zipper on the
31 - 100 cal/cm²* coats

Arc Rated hook & pile storm flap

Coats are intended to be used with PRO-HOODS

Meets current ASTM F1506 and NFPA 70E standards

Standard sizing includes size S-3XL. Other sizes are available by special order.

NOTE: Garments that have received CE 1020 certification will be marked accordingly.



ACC4032PLT

CAT. NO.	DESCRIPTION
ACC832BL	8 cal/cm ² , Navy blue
ACC1132BL	12 cal/cm ² , Navy blue
ACC2032BL	20 cal/cm ² , Navy blue
ACC3132RB	31 cal/cm ² , Royal blue
ACC4032GY	40 cal/cm ² , Gray
ACC4032PLT	40 cal/cm ² , Premium Light Weight, Green
ACC5532GY*	55 cal/cm ² , Gray
ACC7532GY*	75 cal/cm ² , Gray
ACC10032TW*	100 cal/cm ² , Khaki, TuffWeld®

NOTE: Add suffix for desired size: S, M, L, XL, 2XL, or 3XL

EXCLUSIVE FEATURE



Dual stage front closure with high temperature plastic zipper and arc rated hook & pile storm flap on 31-100 cal/cm² coat designs.



ACC3132RB



ACC10032TW



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

PRO-WEAR® FLASH PROTECTION BIB OVERALLS

8 - 100 CAL/CM²

ARC FLASH PROTECTION BIB OVERALLS

8 cal/cm² to 100 cal/cm²* ATPV ratings

8 cal/cm² to 75 cal/cm²* Bib overalls are made from arc flash resistant material

100 cal/cm²* bib overalls are made from TuffWeld® and Q/9® Material layers

Sewn with Nomex® thread

Integrated heavy duty suspenders

Relaxed cut for greater mobility

30" inseam

Adjustable hook and pile waist straps

Bib front for added protection

Adjustable gussets on pant cuffs

Standard sizing includes size S-3XL. Other sizes are available by special order.

Meets current ASTM F1506 and NFPA 70E standards

NOTE: Garments that have received CE 1020 certification will be marked accordingly.



ACB2030BL



ACB3130RB

CAT. NO.	DESCRIPTION
ACB830BL	8 cal/cm ² , Navy blue
ACB1130BL	12 cal/cm ² , Navy blue
ACB2030BL	20 cal/cm ² , Navy blue
ACB3130RB	31 cal/cm ² , Royal blue
ACB4030GY	40 cal/cm ² , Gray
ACB4030PLT	40 cal/cm ² , Premium Light Weight, Green
ACB5530GY*	55 cal/cm ² , Gray
ACB7530GY*	75 cal/cm ² , Gray
ACB10030TW*	100 cal/cm ² , Khaki, TuffWeld®

NOTE: Add suffix for desired size: S, M, L, XL, 2XL, or 3XL

LIGHTEST IN THE INDUSTRY
11 OZ/YD² TOTAL FABRIC WEIGHT



ACB10030TW



ACB4030PLT

If You Need it, Request it. Call customer service if you need something not seen here.



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

PRO-WEAR® ARC FLASH PROTECTION PREMIUM COVERALLS

8 - 20 CAL/CM²

ACCA11BL



ARC FLASH PROTECTION COVERALLS

8 cal/cm² to 20 cal/cm² ATPV ratings

Made from arc flash resistant material

Sewn with Nomex® thread

Full cut with set in sleeves

Arc rated hook and pile front closure

30" Inseam

Expansion back

2-Ply Nomex® wristlets

Hook and pile cuff opening

Meets current ASTM F1506 and NFPA 70E standards.

Standard sizing includes size S-3XL. Other sizes are available by special order.

NOTE: Garments that have received CE 1020 certification will be marked accordingly.

CAT. NO.	DESCRIPTION
ACCA8BL	8 cal/cm ² , Navy blue
ACCA11BL	12 cal/cm ² , Navy blue
ACCA20BL	20 cal/cm ² , Navy blue

NOTE: Add suffix for desired size: S, M, L, XL, 2XL or 3XL

PRO-WEAR® ARC FLASH PROTECTION PREMIUM OVERPANTS

8 - 20 CAL/CM²

ACP830BL



Elastic waistband for maximum comfort.



ARC FLASH PROTECTION OVERPANTS

Overpants have full elastic waistband with arc rated hook and pile front closure

30" Inseam

Overpants have hook and pile cuff adjustment

SALISBURY EXCLUSIVE

The Salisbury overpants provide a quick and cost-effective way to maximize protection. Loose design and flared legs make it easy to put on and take off over existing work clothing.

CAT. NO.	DESCRIPTION
ACP830BL	8 cal/cm ² , Overpants, Navy blue
ACP1130BL	12 cal/cm ² , Overpants, Navy blue*
ACP2030BL	20 cal/cm ² , Overpants, Navy blue*

NOTE: Add suffix for desired size: S, M, L, XL, 2XL or 3XL

PRO-WEAR® ARC FLASH PROTECTION PREMIUM COAT AND PANT KITS

8 - 12 CAL/CM²

ARC FLASH SAFETY PROTECTIVE EQUIPMENT

8 & 12 CAL/CM² KITS - Salisbury's line of Pro-Wear® arc flash protective apparel has expanded to include HRC2 Coat and Pant Kits. These new kits provide everything needed for eye, face, head and body protection and are available in several configurations to make ordering easier and more convenient.

As with all products that carry the Salisbury by Honeywell Pro-Wear® name, the HRC2 Coat and Pant Kits are made from industry leading materials. The HRC2 Coat and Pant Kits contain premium grade garments that offer increased breathability and comfort. The face shields are made utilizing nanotechnology which produces a clearer, more transparent window, thus improving user visibility. Additionally, the ventilation ribs featured on the face shield unit allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.

Standard sizing includes size S-3XL. Other sizes are available by special order.



CAT NO.	DESCRIPTION
---------	-------------

8 CAL/CM² COAT AND PANT KITS

SKC8	ACC832BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKCP8	ACC832BL, ACP830BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKCP8-1200	ACC832BL, ACP830BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG

10 CAL/CM² COAT AND PANT KITS

SKCP11	ACC1132BL, ACP1130BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
--------	--

12 CAL/CM² COAT AND PANT KITS

SKCP11-1200	ACC1132BL, ACP1130BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG
-------------	--

NOTE: Add suffix for desired size: S, M, L, XL, 2XL or 3XL. Available in larger sizes upon request.
Contact your local Salisbury Representative for details.



NOTE: STANDARD SIZING FOR PRO-WEAR® GARMENTS IS S-3XL. GUARANTEED FLAME RESISTANCE FOR THE LIFE OF THE GARMENT WHEN WASHED ACCORDING TO CARE INSTRUCTIONS. PLEASE CONTACT SALISBURY BY HONEYWELL CUSTOMER SERVICE FOR ADDITIONAL SIZING OPTIONS AND AVAILABILITY.



***IMPORTANT:** THE MAXIMUM ARC FLASH PROTECTION OF A KIT IS EQUAL TO THE LOWEST CAL/CM² RATING OF ANY COMPONENT IN THE SELECTED SAFETY KIT.

ARC FLASH PROTECTION PREMIUM COVERALL KITS

8 & 12 CAL/CM² HRC 2

THESE KITS MEET NFPA 70E
PPE CATEGORY 2.



SALISBURY PRO-WEAR® ARC FLASH PROTECTION COVERALL KITS are clothing kits containing arc flash coveralls in an ATPV rating of either 8 cal/cm² or 12 cal/cm², an AS1000HAT, ATPV rated AFHOOD, an appropriate ASBAG, SKBAG and safety glasses.

Standard sizing includes size S-3XL. Other sizes are available by special order.



SKCA8-1200

PRODUCT NUMBERING CHART FOR PPE KITS W/ COVERALLS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE	Description
SKCA8	S, M, L, XL, 2XL or 3XL	8	2	Navy
SKCA11	S, M, L, XL, 2XL or 3XL	10	2	Navy
Example: SKCA8L	L	8	2	Navy

Add suffix "-1200" to replace AS1000HAT w/ AS1200HAT.

SKCA8L is a large clothing kit containing a coveralls in an ATPV rating of 8 cal/cm², AS1000HAT, AFHOOD, storage bags and safety glasses.

NOTE: Available in larger sizes upon request. Contact your local Salisbury Representative for details.

NOTE: Garments that have received CE 1020 certification will be marked accordingly.



***IMPORTANT:** THE MAXIMUM ARC FLASH PROTECTION OF A KIT IS EQUAL TO THE LOWEST CAL/CM² RATING OF ANY COMPONENT IN THE SELECTED SAFETY KIT.

SALISBURY ADVANTAGE
LARGEST SELECTION OF KIT
OPTIONS AVAILABLE.



PRO-WEAR® PERSONAL PROTECTION EQUIPMENT KITS

8 - 12 - 20 CAL/CM² HRC 2 & 31 CAL/CM² HRC 3

SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTIVE EQUIPMENT KITS AVAILABLE IN ATPV RATINGS OF 8, 12 AND 20 CAL/CM². These kits contain arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

Standard sizing includes size S-3XL. Other sizes are available by special order.

These kits meet NFPA 70E PPE Category 2.

PRODUCT NUMBERING CHART FOR 8 CAL/CM² TO 20 CAL/CM² PPE KITS

Salisbury Cat. No.	SIZE of Garments (choose one below)	ATPV Rating cal/cm ²	PPE	COLOR
SK8	S, M, L, XL, 2XL or 3XL	8	2	Navy
SK11	S, M, L, XL, 2XL or 3XL	12	2	Navy
SK20	S, M, L, XL, 2XL or 3XL	20	2	Navy
Example: SK8M	M	8	2	Navy

SK8M is a medium clothing kit with a rating of 8 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.



SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTIVE EQUIPMENT KITS ARE AVAILABLE IN AN ATPV RATING OF 31 CAL/CM². This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

Standard sizing includes size S-3XL. Other sizes are available by special order.

This kit meets NFPA 70E PPE Category 3.

PRODUCT NUMBERING CHART FOR 31 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE
SK31	S, M, L, XL, 2XL or 3XL	31	3
Example: SK31S	S	31	3

SK31S is a small clothing kit with a rating of 31 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.



SK11



SK31

PRO-WEAR® PREMIUM LIGHT WEIGHT

40 CAL/CM² HRC 4 PREMIUM LIGHT WEIGHT



SALISBURY PREMIUM LIGHT WEIGHT PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT -

Salisbury by Honeywell's NEW Premium Light Weight 40 cal/cm² Arc Flash Protection Suit has a total fabric weight of 11 oz/yd² as compared to the standard 40 calorie garment with a fabric weight of 18 oz/yd². This material is the lightest available and meets all the necessary standards to keep you safe from arc flash. Keep cooler and improve worker comfort without compromising safety. Better products means better work performance. Trust Salisbury to always provide the best possible products available.

Complies with NFPA 70E PPE Category 4

Meets ASTM F1506-02A, ASTM F1959M/F1959M-99

Made from synthetic fiber blend

Arc rated for the life of the garment

Available individually (coat, hood, overalls) or in kits

Heat attenuation factor of 93.20% (meaning the garment is not only flame resistant, but it resists 93.2% of the heat experienced in an Arc Flash).

THE SALISBURY ADVANTAGE

11 oz/yd² total fabric weight - **LIGHTEST IN THE INDUSTRY**

Added ease of movement

Keeps user cooler longer

PRO-HOOD® includes the most transparent lens available

Integrated cooling system available for PRO-HOOD®

Longer coat creates better body coverage while working overhead

Adjustable gussets on overall cuffs

Standard sizing includes size S-3XL. Other sizes are available by special order, contact Salisbury customer service.



SK40PLT-LFH40



***IMPORTANT: NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.**

CAT. NO.	DESCRIPTION	SIZES
FH40PLT	40 cal/cm ² , Hood, Premium Light Weight	S, M, L, XL, 2XL or 3XL**
ACC4032PLT	40 cal/cm ² , Coat, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
ACB4030PLT	40 cal/cm ² , Overall, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
SK40PLT	40 cal/cm ² , Kit, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
SK40PLT-LFH40	40 cal/cm ² , Kit, Premium Light Weight W/LFH40 PLT	S, M, L, XL, 2XL or 3XL*
FH40PLT-C	40 cal/cm ² , Hood w/ cooling, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
SK40PLT-C	40 cal/cm ² , Kit w/ cooling, Premium Light Weight	S, M, L, XL, 2XL or 3XL*

NOTE: Add suffix for desired size: S, M, L, XL, 2XL, or 3XL. Available in larger sizes upon request. Includes Premium Poly-Carbonate Faceshields. Contact your local Salisbury Representative for details.



FH40PLT

PRO-WEAR® PERSONAL PROTECTION EQUIPMENT KITS

40 CAL/CM² HRC 4 & 55 - 75 CAL/CM² HRC 4

SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT KITS AVAILABLE IN ATPV RATING OF 40 CAL/CM². This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses. Includes premium poly-carbonate faceshields.

2-COLOR PRO-WEAR® ARC FLASH PROTECTION PPE KITS AVAILABLE.

Standard sizing includes size S-3XL. Other sizes are available by special order.

These kits meet NFPA 70E PPE 4

PRODUCT NUMBERING CHART FOR 40 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE	Description
SK40	S, M, L, XL, 2XL or 3XL	40	4	Gray kit
SK40PLT	S, M, L, XL, 2XL or 3XL	40	4	Premium Light Weight
Example:				
SK402XL	2XL	40	4	Gray Kit

SK402XL is an extra extra large clothing kit with a rating of 40 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

Add – “LFH40” to any 40 calorie kit to replace the standard hood with our **NEW** Lift Front Hood.



SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT KITS AVAILABLE IN ATPV RATING OF 55 AND 75 CAL/CM²*. These kits contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

Standard sizing includes size S-3XL. Other sizes are available by special order.

These kits meet NFPA 70E PPE 4.

PRODUCT NUMBERING CHART FOR 55 CAL/CM² & 75 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE
SK55*	S, M, L, XL, 2XL or 3XL	55	4
SK75*	S, M, L, XL, 2XL or 3XL	75	4
Example:			
SK55XL	XL	55	4

SK552XL is an extra large clothing kit with a rating of 55 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

LIGHTER MATERIAL THAN EVER 40 CAL/CM² “PLT” MATERIAL OFFERS EXTREMELY LIGHT WEIGHT OPTION.



SK40



SK75



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

PRO-WEAR® PERSONAL PROTECTION EQUIPMENT KITS

100 CAL/CM² HRC 4

LIGHTER MATERIAL THAN EVER. 100 CAL/CM² MATERIALS OFFERS A LIGHTER WEIGHT OPTION.



SALISBURY PRO-WEAR® ARC PERSONAL PROTECTION EQUIPMENT KITS ARE AVAILABLE IN AN ATPV AN RATING OF 100 CAL/CM²*. This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses. Made from an exclusive Salisbury brand which offers inherent arc rated protection with a high level of comfort and durability. Exceptional light weight comfort with superb wicking so you can stay cooler and drier even under demanding conditions.

Standard sizing includes size S-3XL. Other sizes are available by special order.

This kits meet NFPA 70E PPE Category 4.

PRODUCT NUMBERING CHART FOR 100 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	PPE
SK100*	S, M, L, XL, 2XL or 3XL	100	4
Example: SK100L	L	100	4

SK1002XL is an arge clothing kit with a rating of 100 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

If you need it, request it. Call customer service if you need something not seen here.



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.



Stay Compliant with OSHA

1910.269 & 1926.960
UPDATES

BE PREPARED FOR THE NEWEST OSHA REVISIONS

ARC FLASH FACE PROTECTION

Salisbury's weight Balancing Arc Flash Protection Face Shield series with an ATPV rating of 12-20 cal/cm².*

Satisfies the requirements of Paragraph (g)(5)(iv)&(v)

NEXT GENERATION OF ARC FLASH HOODS

Salisbury's revolutionary 40 cal/cm² Lift Front Hood (LFH40PLT) combines the award winning weight balancing face shield, a transparent chin guard and premium lightweight fabric. The LFH40PLT also provides increased visibility and airflow to unite comfort and safety.

Satisfies the requirements of Paragraph (g)(5)(iv)&(v)

DIELECTRIC FOOTWEAR

Salisbury's ASTM dielectric footwear is 100% waterproof and made from premium grade, ozone resistant rubber and tested to 20 KV.

Satisfies the requirements of Paragraph (g)(5)(ii)

INSULATED RUBBER GLOVES

Available in Class 00-4, sizes 7 through 12, including some half sizes, Salisbury's insulating Rubber Gloves are all extremely flexible and make working with small parts easy.

Satisfies the requirements of Paragraph (g)(5)(i)

ARC FLASH SAFETY KITS

These new kits provide everything needed for eye, face, head and body protection and are available in several configurations to make ordering easier and more convenient.

Satisfies the requirements of Paragraph (g)(5)

PREMIUM LIGHTWEIGHT ARC FLASH SUIT

Salisbury by Honeywell's Premium Light Weight 40 cal/cm² Arc Flash Protection Suit is approximately 30% lighter than Salisbury's standard HRC 4 suit. Keep cooler and improve worker comfort without compromising safety.

Satisfies the requirements of Paragraph (g)(5)(iv)&(v)

ARC FLASH FACE PROTECTION 12-40 CAL/CM²



DIELECTRIC FOOTWEAR Whole Sizes 7-17



INSULATED RUBBER GLOVES AVAILABLE IN SIZES 7 THROUGH 12, INCLUDING SOME HALF SIZES



ARC FLASH SAFETY CLOTHING & KITS



ARC FLASH SAFETY KITS: Sizes available S, M, L, XL, L, 2XL, 3XL

SKCP8-1200	8 cal/cm ² Coat & Pants with AS1200HAT
SKCP11-1200	12 cal/cm ² Coat & Pants with AS1200HAT
SKCA8	8 cal/cm ² Coveralls with AS1000HAT
SKCA11	10 cal/cm ² Coveralls with AS1000HAT
SK40PLT	40 cal/cm ² Bib overalls, Coat, Hard Hat, Pro-Hood, Safety Glasses & SKBAG



IMPORTANT: THE MAXIMUM ARC FLASH PROTECTION OF A KIT IS EQUAL TO THE LOWEST CAL/CM² RATING OF ANY COMPONENT IN THE SELECTED SAFETY KIT.

SALISBURY
by Honeywell

**WE HAVE YOU COVERED
FROM HEAD TO TOE.**



***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.
NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.



PERFORMANCE WORK GLOVES. These high quality performance work gloves are constructed of a synthetic and natural material blend. These gloves are highly durable and comfortably form-fit to the hand without inhibiting dexterity.

EXTENSIVE REINFORCEMENT: Salisbury by Honeywell work gloves have extensive palm and finger coverage. The PVC based asphalt reinforcement material is tacky, making the gloves more dexterous, durable and provides a secure grip even in wet conditions.

CUFF: Some of these gloves feature a FlexMesh™ cuff which is a protective, breathable and comfortable cuff closing system that does not require constant adjusting.

THUMB CUT: The unique 3-D palm construction design prevents bunching between the thumb and index finger.

STREAMLINED KNUCKLE PROTECTION: The knuckle protection on the back of the hand is internalized and will NOT get “caught up” when reaching into a tool pouch or pocket.

DURABLE SYNTHETIC LEATHER ON BASE OF PALM: The base layer is synthetic suede called SupraTex™. This material is highly breathable and durable. The material wicks away heat and moisture which prevents sweat and heat from building up.



UWG-GPU

UWG-GPU - UTILITY PLUS GLOVE - ABRASION RESISTANT - ALL PURPOSE

This glove features asphalt reinforcement on the palm to resist abrasion. The top of the hand is made out of a stretchable, light weight and breathable reinforced nylon for comfort. The glove also features internal knuckle protection.



UWG-KLG

UWG-KLG - KEVLAR® UTILITY GLOVE - CUT RESISTANT - ALL PURPOSE

This all purpose work glove is highly cut-resistant and features a 100% KEVLAR® lining. This glove has great dexterity and durability.



UWG-WPSC

UWG-WPSC - WATERPROOF PRO UTILITY GLOVE - WINTER - ALL PURPOSE

This all purpose waterproof/breathable work glove is designed for cooler weather. It features stretch nylon on the top of the hand and an extended FlexMesh™ cuff. The inner liner is made with a warm microfleece. The glove is entirely waterproof, windproof and breathable. The palm features a SupraTex™ base layer with a durable asphalt palm reinforcement.



UWG-HUXT

UWG-HUXT - PRO UTILITY GLOVE - MAX ABRASION RESISTANT - ALL PURPOSE

This all purpose work glove has maximum abrasion resistance, good dexterity and breathability. The top of the hand features stretch nylon and the extended cuff includes asphalt reinforcement on the palm side.

UWG-WPGC



UWG-WPGC - WATERPROOF WINTER UTILITY GLOVE - GAUNTLET STYLE

This work glove is a warm and durable glove. This glove is 100% waterproof, windproof and breathable. It features a Sportwool™ liner that allows the hand to remain comfortable for long periods of time in extreme weather conditions. 3M Thinsulate™ Insulation lines the top of the hand, fingers and cuff.

All gloves are available in sizes S-2XL.

CAT. NO.	DESCRIPTION
UWG-GPU	Utility plus glove - abrasion resistant - all purpose
UWG-KLG	KEVLAR utility glove - cut resistant - all purpose
UWG-WPSC	Waterproof winter pro utility glove - all purpose
UWG-HUXT	Pro utility glove - max abrasion resistant - all Purpose
UWG-WPGC	Waterproof winter utility glove - gauntlet style

EXAMPLE: Add suffix: “/S” for Small, “/M” for Medium, “/L” for Large, “/XL” for Extra Large, or “/2XL” for 2XLarge.



WARNING: NOT CUT PROOF, PUNCTURE PROOF OR FIRE RETARDANT. DO NOT EXPOSE NEAR OPEN FLAMES, SPARKS OR ARC ZONES.
WARNING: THESE GLOVES ARE NOT INTENDED FOR ENERGIZED ELECTRICAL USE.

THE ULTIMATE BACK PACK, STORAGE BAG & FACE SHIELD BAG

EVERYTHING YOU NEED IN ONE CONVENIENT LIGHT WEIGHT BACKPACK. The **Salisbury SK BACKPACK** is specifically designed to hold virtually everything from tools to full Personal Protective Equipment (PPE) kits. Specialized reinforced compartments with flap closures are located on both sides of the pack and include flexible slots designed specifically to keep your hand tools in place. The individual compartments make finding the right tool a snap. The backpack can even be personalized to hold your very own PPE kit - clothing, head and face protection, insulated tool kit and much more. The interior includes extra large compartments to hold voltage detectors or other specialized tools, as well as numerous, smaller partitions and a specific area for first aid items.

The rugged **SK BACKPACK** is manufactured from water resistant, reinforced fabric. The SK BACKPACK is resistant to cuts and abrasion. The adjustable, heavy duty straps are wide and padded making it very comfortable to wear regardless of the load. The SK BACKPACK includes an exterior hard hat strap, D-rings and universal snap hook. It even includes a built-in integrated handle for those on the move.

LARGE STORAGE BAG for storing Salisbury PRO-WEAR® Arc Flash Clothing, gloves and other accessories. Comes standard in most PRO-WEAR kits. Bag is 24" long x 15" high x 12" deep.

The **ASBAG** is specially designed to protect and store Salisbury face shields with hard hat combinations. The soft-napped fleece liner on the inside of the bag provides protection from scratches and protects the face shield from coming into contact with dirt and dust.

CAT. NO.	DESCRIPTION
SKBACKPACK	Reinforced specialty backpack (14"L x 8"W x 18"H)
SKBAG	Large storage bag (24"L x 12"W x 15"H)
ASBAG	Large face shield storage bag w/ drawstring closure with fleece lined interior (21"L X 19"W X 14"H).



SKBACKPACK



SKBAG



ASBAG

Salisbury PPE Category Chart



PPE CATEGORY

Required minimum Arc Rating
of PPE 4CAL/CM²

1

Arc-Rated Long-Sleeve Shirt and Pants or
Arc-Rated Coverall
Arc-Rated Face shield or Arc Flash Suit hood
Arc-Rated Jacket, Parka, or Rainwear (AN)
Hard Hat
Safety Glasses or Safety Goggles (SR)
Hearing Protection (Ear Canal Inserts)
Heavy Duty Leather Gloves*
Leather work Shoes (AN)

PPE CATEGORY

Required minimum Arc Rating
of PPE 8CAL/CM²

2

Arc-Rated Long-Sleeve Shirt and Pants or
Arc-Rated Coverall
Arc Flash Suit Hood or Arc-Rated Face
shield and Arc-Rated Balaclava
Arc-Rated Jacket, Parka, or Rainwear (AN)
Hard Hat
Safety Glasses or Safety Goggles (SR)
Hearing Protection (Ear Canal Inserts)
Heavy Duty Leather Gloves*
Leather work Shoes



NOTE:

**ALWAYS WEAR VOLTAGE
RATED RUBBER GLOVES WITH
PROTECTORS WHEN WORKING
ON VOLTAGES OPERATING AT
50V OR MORE.**

*Leather Gloves made entirely of leather with a minimum thickness of .03, are unlined or lined with nonflammable non-melting fabrics.

PPE CATEGORY

Required minimum Arc Rating
of PPE 25CAL/CM²

3

Arc-Rated Long-Sleeve Shirt (AR)
Arc-Rated Pants (AR)
Arc-Rated Coverall (AR)
Arc-Rated Arc Flash Suit Jacket (AR)
Arc-Rated Arc Flash Suit Pants (AR)
Arc-Rated Arc Flash Suit Hood
Arc-Rated Gloves or Rubber Insulating
Gloves with Leather Protectors (SR)
Arc-Rated Jacket, Parka, Rainwear or Hard
Hat Liner (AN)
Hard Hat
Safety Glasses or Safety Goggles (SR)
Hearing Protection (Ear Canal Inserts)
Leather Work Shoes

PPE CATEGORY

Required minimum Arc Rating
of PPE 40CAL/CM²

4

Arc-Rated Long-Sleeve Shirt (AR)
Arc-Rated Pants (AR)
Arc-Rated Coverall (AR)
Arc-Rated Arc Flash Suit Jacket (AR)
Arc-Rated Arc Flash Suit Pants (AR)
Arc-Rated Arc Flash Suit Hood
Arc-Rated Gloves or Rubber Insulating
Gloves with Leather Protectors (SR)
Arc-Rated Jacket, Parka, Rainwear or Hard
Hat Liner (AN)
Hard Hat
Safety Glasses or Safety Goggles (SR)
Hearing Protection (Ear Canal Inserts)
Leather Work Shoes

AN = As Needed (optional)
AR = As Required
SR = Selection Required



SALISBURY

by Honeywell

Protective Rubber Equipment Labeling Chart

for Salisbury Natural Rubber and SALCOR® Rubber Protective Equipment

Class Color	Proof Test Voltage AC / DC	Max. Use Voltage* AC / DC	Rubber Molded Products Label	Insulating Rubber Glove Label	Insulating Rubber Dipped Sleeve Label
00 Beige	2,500 / 10,000	500 / 750			
0 Red	5,000 / 20,000	1,000 / 1,500			
1 White	10,000 / 40,000	7,500 / 11,250			
2 Yellow	20,000 / 50,000	17,000 / 25,500			
3 Green	30,000 / 60,000	26,500 / 39,750			
4 Orange	40,000 / 70,000	36,000 / 54,000			

ASTM Specification Reference

D120	Rubber Insulating Gloves
D178	Rubber Insulating Matting
D1048	Rubber Insulating Blankets
D1049	Rubber Insulating Covers
D1050	Rubber Insulating Line Hose
D1051	Rubber Insulating Sleeves
F478	In-Service Care of Line Hose & Covers
F479	In-Service Care of Insulating Blankets
F496	In-Service Care of Gloves & Sleeves
F696	Leather Protectors for Insulating Gloves and Mittens
F1236	Inspection Guide for Rubber Products

F1742	PVC Insulating Sheeting
F2320	Rubber Insulating Sheeting
F2677	Electrically Insulating Aprons
Type I-	Designates natural rubber.
Type II-	Designates SALCOR® UV and ozone resistant rubber.

* Max. Use Voltage when worn with leather protectors.

Insulating Gloves and Sleeves must have a color coded label to meet appropriate ASTM Specifications.

SALISBURY
by Honeywell

PERSONAL ELECTRICAL SHOCK PROTECTION & ACCESSORIES

THE SALISBURY ADVANTAGE
LEADING MANUFACTURER OF INSULATING RUBBER GLOVES

INSULATING RUBBER GLOVES ARE AMONG THE MOST IMPORTANT ARTICLES OF PERSONAL PROTECTION FOR ELECTRICAL WORKERS. Combining high dielectric and physical strength, flexibility and durability, Salisbury insulating rubber gloves have earned the reputation for superior performance-meeting and exceeding the requirements of current ASTM D120 specifications and NFPA 70E standards.

SALISBURY OFFERS THE MOST COMPLETE SELECTION OF INSULATING RUBBER GLOVES IN THE WORLD.

Salisbury recommends an alternating glove color program to ensure all gloves are in the proper test cycle per OSHA and ASTM requirements. This program creates a visual reminder of the test cycle period by using one glove color for the first test period and a different color for the following test period. Continue alternating these two colors when a new test period begins. For example: Red Class 00 gloves are worn for first test cycle period. The black Class 00 gloves are worn during the second test cycle period.

WE TAKE YOUR SAFETY SERIOUSLY.

EFFECTS OF ELECTRICAL SHOCK

CURRENT	EFFECTS
1-3Milliamps	Tingling Sensation
3+Milliamps	Shock (pain)
10+Milliamps	Muscular Contractions (can't let go)
30+Milliamps	Respiratory Paralysis (may be fatal)
60+Milliamps	Ventricular Fibrillation (usually fatal)
4+Amps	Heart Paralysis (fatal)
5+Amps	Tissue Burning (fatal, vital organs destroyed)

LOW VOLTAGE MOLDED SLEEVES & ACCESSORIES

MOLDED SLEEVES are manufactured by either injection or compression molding methods. The advantage these methods offer is the ability to produce sleeves of Type I or SALCOR® Type II synthetic rubber. SALCOR® sleeves provide the same high quality and electrical protection as natural rubber, with the added benefit of being resistant to ozone and ultraviolet radiation. Type I sleeves are available in black, yellow or maroon. Type II SALCOR® sleeves are black or orange. Molded sleeves are available in curved arm style only.

PROPER STORAGE EXTENDS THE SERVICE LIFE OF MOLDED SLEEVES. Folds and creases strain rubber and cause it to crack from ozone prematurely. By storing rubber sleeves in the right size bag, and never forcing more than one pair into each bag, equipment will lie flat and extend the life of the product. Salisbury bags are constructed of heavy duty canvas duck and are double stitched and riveted at stress points for extra durability. Canvas bags feature a D ring for hanging in trucks or on work belts. Bags feature tapered gussets with wide opening tops for easy insertion.

SLEEVE BUTTONS, STRAPS AND HARNESSES are required to wear rubber insulating sleeves properly. Four buttons are required per pair of sleeves. Two straps are required per pair of sleeves. One harness is required per pair of sleeves.

Black Type I 2RB



Yellow Type I 3LY



Orange Type II 2ROS



CAT. NO. BREAKDOWN FOR MOLDED TYPE I SLEEVES

VOLTAGE CLASS	SIZE	COLOR
1	R or L	Y
2	R, L or XL	B, Y, M
3	R or L	Y, M
4	R or L	M

R=Regular L=Large XL=Extra Large B=Black Y=Yellow
Example: 2LB M=Maroon

CAT. NO. BREAKDOWN FOR MOLDED TYPE II SLEEVES

VOLTAGE CLASS	SIZE	COLOR
1	R or L	BS or OS
2	R, L or XL	BS or OS

R=Regular L=Large XL=Extra Large BS=Black SALCOR
Example: 2LOS OS=Orange SALCOR

CAT. NO.	FOR SLEEVE LENGTH in. (mm)	DIMENSIONS inches (mm)	WEIGHT EA. lbs. (kgs)
----------	------------------------------	--------------------------	-------------------------

CANVAS SLEEVE BAG

T31	—	30" x 9.5" (762 x 241mm)	1.5 (. 7)
T32	—	30" x 13" (762 x 330 mm)	3 (1.4)

BUTTONS

B2	—	One Piece Sleeve Button	.2 (.01)
B22	—	4 Screw Type Buttons	.8 (.04)

STRAPS

S1	15"(381mm) Strap w/ 4 B2 Buttons	.1 (.005)
----	----------------------------------	-------------

HARNESS

H1	Harness w/ 4 B2 Buttons	1 (.45)
----	-------------------------	-----------



INSULATING RUBBER GLOVES



SALISBURY INSULATING RUBBER GLOVES are available in sizes 7 through 12, including some half sizes. Proper fit is important to minimize chafing and fatigue. To determine glove size, measure the circumference around the palm. Allow for additional room if fabric glove liners are to be worn, especially with thermal liners.

Class 00 gloves are available in red and black, Type I Natural Rubber or blue and contrasting blue/orange Type II Salcor® ozone resistant rubber. Class 0 gloves are available in red, yellow and black, Type I Natural Rubber or blue Type II Salcor® ozone resistant rubber. The contrast between the thin outer orange color against the inner blue color makes inspecting for cuts and tears easier when the glove is inflated or stretched.

Class 2 gloves are available in Type I Natural Rubber only. All insulating rubber gloves are extremely flexible and make working with small parts easy. The gloves meet or exceed ASTM D120 and IEC EN60903 Standards.

INSULATED RUBBER GLOVES

CLASS	LENGTH	COLOR	SIZE (choose one below)
E 00	11 or 14	R, BL, B, Y or BLO	7, 8, 8H, 9, 9H 10, 10H, 11, 12
E 0	11 or 14	R, BL, B, Y or BLO	
E 1	14,16 or 18	B, YB or RB	
E 2	14,16 or 18	B, YB or RB	

Class 3 and Class 4 Available.

EXAMPLE: E011R10 is a Class 0 11" red glove size 10.

Type I Natural Rubber available in: R=Red, Y=Yellow, B=Black, RB=Red in, Black out, YB=Yellow in, Black out.

Type II Salcor® Rubber available in: BL=Blue, BLO=Blue in, Orange out.



E011BL8



E0011B8



E0014R8



E218YB10



TEN-FOUR® GLOVE DUST is a cooling, frictionless powder that absorbs moisture and perspiration when wearing rubber gloves. The 5-oz. bottle easily fits in a pocket or glove bag. The 4-quart bulk package is used in test labs as a dusting powder.

TEN-FOUR® GLOVE DUST

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
10-4	12, 5 oz. Squeeze bottles	5.5 (12)
10-4-QT	4 qt. Bulk, single	8 (19)

INSULATING RUBBER GLOVES MAXIMUM USAGE

CLASS	PROOF TEST VOLTAGE AC / DC	MAX. USE VOLTAGE AC / DC
00	2500 / 10,000	500 / 750
0	5,000 / 20,000	1,000 / 1,500
1	10,000 / 40,000	7,500 / 11,250
2	20,000 / 50,000	17,000 / 25,500
3	30,000 / 60,000	26,500 / 39,750
4	40,000 / 70,000	36,000 / 54,000



MEASURE THE CIRCUMFERENCE AROUND THE PALM TO DETERMINE THE SIZE OF THE GLOVE.

Contact a Salisbury customer service representative for extensive arc flash testing data performed on the insulating rubber gloves.

LEATHER PROTECTORS AND GLOVE LINERS

LEATHER PROTECTOR GLOVES should always be worn over insulating rubber gloves to provide the needed mechanical protection against cuts, abrasions and punctures. The ILP Series is manufactured from top grain cowhide or goatskin. Cowhide cuffs are tough leather on palm side and orange vinyl on the back, while the goatskin cuffs are green leather on palm side and orange vinyl on back. The ILP10 gloves do not have a cuff. Full complement of styles from low-volt through 16" contour cuff. Leather protector gloves come in dual sizes 7/7.5 through 11/11.5 and 12. Protectors for Class 00 and 0 are available with non-metallic buckle and pull strap or elastic wrist.

It is the responsibility of the purchaser to specify the overall length of the protector gloves. The Clearance Table shows the minimum distance which shall be allowed between the top of the protector glove cuff and the top end of the bead of the rubber glove per ASTM F496 Specifications.

WARNING: Do not use leather protectors alone for protection against electric shock. Serious injury or death will result. Always use proper insulating rubber gloves.

Proper care of leather protectors is essential to user safety. Inspect the leather protectors when inspecting rubber gloves. Metal particles, imbedded wire, abrasive materials or any substance that could physically damage the rubber gloves must be removed from the protector before use.

LINER GLOVES reduce the discomfort of wearing Insulating Rubber Gloves in all seasons. For year round use, liners provide warmth in cold weather while they absorb perspiration in the warm months. Many styles and fabrics are available with either a open or knit wrist.

The knit wrist style grips the wrist rather than allowing the cuff to roll down and bunch at the palm. All Liner Gloves are for year round use with Insulating Rubber Gloves and Mittens. All liners are made from stretch fabric that can fit any hand size.

The L Series has a tough outer cotton fabric while the inner lining is soft and comfortable. The LMKC Series is light, airy and allows ease of movement. The LMKW Series is made from a fabric that moves easily yet gives a substantial layer of lining.

LINER GLOVES

CAT. NO.	DESCRIPTION	WRIST Style	LENGTH in. (mm)	WEIGHT EA. lbs. (kgs)
L10JK	Jersey style, light weight, seams out	Knit	10 (254)	.14 (.06)
L12J	Jersey style, light weight, seams out	Open	12 (305)	.14 (.06)
L10MKW	Machine knit, cotton/wool blend	Knit	10 (254)	.14 (.06)

One size fits all.



ILP10 ILPG10 ILPG7C

LEATHER PROTECTOR CLEARANCE TABLE

GLOVE CLASS	MIN. DISTANCE BETWEEN TOP OF PROTECTORS AND RUBBER GLOVES	
	in.	mm
00, 0	1/2	13
2	2	51

LEATHER PROTECTORS

CAT. NO.		OAL LENGTH in. (mm)	WEIGHT lbs. (kgs)
Cowhide	Goatskin		
ILP3S	ILPG3S	12 (305)	1 (.5)
ILP5S	ILPG5S	14 (356)	1.2 (.5)
ILP7C	ILPG7C	16 (406)	1.5 (.7)
ILP10	ILPG10	10 (254)	.7 (.32)
ILP10A	ILPG10A	10 (254)	.7 (.32)

S=straight cuff, C=contour cuff, A=w/ pull strap.

Sizes: 7/7.5, 8/8.5, 9/9.5, 10/10.5, 11/11.5, 12



L10MKW

L10JK

L12J

INSULATING GLOVES AND PROTECTORS KITS

SHOCK PROTECTION



GLOVE KITS - Salisbury's insulating rubber gloves are necessary for every electrical worker's complete safety. Salisbury's leather protectors provide needed protection from cuts, abrasions and punctures. To keep these safety items in top condition, proper storage is very important.

Proper storage extends the service life of gloves. Folds and creases strain natural rubber and cause it to cut from ozone prematurely. Storing rubber gloves in the right size bag and never forcing more than one pair into each bag, equipment will lie flat and last longer.

PRODUCT NUMBERING CHART FOR GLOVE KITS

CLASS	LENGTH (inches)	COLOR	GLOVE SIZE (choose one below)
GK 00	11 or 14	B, BL, Y, R	7, 8, 8H, 9, 9H
GK 0	11 or 14	B, BL, Y, R	10, 10H, 11, 12
GK 2	14, 16, or 18	B, RB	
Example: GK011BL9	11	BL	9

GK011BL9 is a glove kit with a Blue Class 0 glove 11" long size 9. The appropriate glove bag and leather protectors will be included.

Type I Natural Rubber available in: R=Red, Y=Yellow, B=Black

RB=Red in, Black out.

Type II Salcor® Rubber available in: BL=Blue



MEASURE THE CIRCUMFERENCE AROUND THE PALM TO DETERMINE THE SIZE OF THE GLOVE.

NOTE: If you require test date stamping, please specify when ordering.



GK011BL8

PRO-WEAR® ARC FLASH GLOVES

12 - 100 CAL/CM²

SALISBURY PRO-WEAR® ARC FLASH GLOVES are available in ATPV ratings of 12 to 100 cal/cm²*. These gloves are sewn with Nomex® thread. All gloves are made with arc rated material.

All Arc Flash Gloves are 14" long and designed in a clute cut style. One size fits most.

CAT. NO. DESCRIPTION

AFG11	12 cal/cm ² , Navy blue,
AFG20	20 cal/cm ² , Navy blue
AFG31	31 cal/cm ² , Royal blue
AFG40	40 cal/cm ² , Gray
AFG55*	55 cal/cm ² , Gray
AFG100*	100 cal/cm ² , khaki



CAUTION: ARC FLASH GLOVES DO NOT PROVIDE ELECTRICAL PROTECTION. DO NOT USE WHEN INSULATING RUBBER GLOVES ARE REQUIRED.
***IMPORTANT:** NFPA 70E DOES NOT HAVE A PPE CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

GLOVE BAGS, GLOVE INFLATOR AND DIELECTRIC FOOTWEAR

SHOCK PROTECTION

GLOVE BAGS - Salisbury bags are constructed of heavy duty canvas duck and are double stitched at stress points for extra durability. Canvas bags feature a snap hook for hanging on work belts. Bags feature tapered gussets with wide opening tops for easy insertion.

PRODUCT NUMBERING CHART FOR GLOVE BAGS

CAT. NO.	GLOVE Length in. (mm)	DIMENSIONS in (mm)	WEIGHT lbs. (kgs)
GB112	11 (280)	9" X 14" (229 X 356)	1 (.5)
GB114	14 (356)	9" X 16" (229 X 406)	1 (.5)
GB116	16 (406)	9" X 18" (229 X 457)	1.2 (.6)
GB118	18 (457)	9" X 20" (229 X 508)	1.5 (.7)

GLOVE INFLATOR - Electrical insulating gloves must be inspected before each use. Inspection is simplified by using a portable glove inflator such as the Salisbury G99 and the G100 with adapter for Class 00 and 0 and smaller size gloves. The Patented G99 is a simple, easy to use, portable glove inflator. The G99 provides a quality means of inspecting gloves in the field. The glove is secured to the inflator using a nylon strap and fastened with hook and pile. Inflation is accomplished by pumping the bellows of the inflator.

GLOVE INFLATOR

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
G99	Glove inflator kit	2 (.91)
G99B	Replacement bag	-
G99S	Replacement strap	-
G99V	Replacement check valve	-
G100	Glove inflator kit w/ adapter	-
G100A	Small low-volt glove adapter	-

ASTM DIELECTRIC FOOTWEAR - 100% TESTED TO 20KV - Salisbury's ASTM dielectric footwear is 100% waterproof and made from premium grade, ozone resistant rubber. The flexible hand-layered construction includes a durable, nylon lining for easy on/off. The sole has a durable construction with a non-skid, bar tread outsole. The attached buckle and hardware is nonmetallic. All of Salisbury's ASTM Dielectric Footwear conforms with ASTM F2413 and is 100% tested to the electrical hazard requirements of ASTM F2413 at 20,000 volts.

DIELECTRIC FOOTWEAR

CAT. NO.	DESCRIPTION	SIZES	WEIGHT PR. lbs. (kgs)
21402	17", 1 Buckle overboot	Whole sizes 7 - 17	5.8 (2.6)
51530	2-Buckle Overshoe	Whole sizes 6 - 17	4.4 (.2)
51581	Non-buckle overshoe	Whole sizes 7 - 17	3.3 (1.5)
31924	11" 4-Buckle Artic Overboot	Whole sizes 6 - 17	4.6 (2.1)
51824	Storm Rubber Overshoe	Whole sizes 7 - 16	3.25 (1.5)
31910	11" 4 Buckle Overboot-V-Grip	Whole sizes 7 - 17	3.8 (1.7)
51510	Deep Heel Rubber Overshoe	Whole sizes 6 - 12	3.1 (1.4)

NOTE: When ordering, add size as suffix to part number. Be sure to add a space between the part number and size. Example: 51511 7

GB114



G99



G100 WITH INFLATED LOW-VOLT GLOVE READY FOR INSPECTION.

G100



21402



31924



31910



SERVUS
by Honeywell

51824



51530



51581



51510



ARC PROTECTION BLANKETS AND SWITCHBOARD MATTING

MEETS THE ASTM F2676 STANDARD



ARC45-40



ARC45-15



WARNING: BECAUSE OF THE UNPREDICTABILITY OF ELECTRICAL ARCS, THE ARC PROTECTIVE BLANKET (APB) MAY NOT TOTALLY CONTAIN THE ARC AND FLASHES, BUT ONLY REDUCE OR LIMIT EXPLOSIVE AND INCENDIARY EFFECTS. PROPERLY INSTALLED APBS CAN REDUCE THE RISK OF INJURY FROM THE BLAST AND HEAT, HOWEVER THEY DO NOT PROVIDE ANY PERSONAL PROTECTION FOR BUT NOT LIMITED TO HEARING, EYES, SMOKE/ HAZARDOUS GASES INHALATION AND BURNS.

WARNING: ARC PROTECTIVE BLANKETS ARE NOT DESIGNED FOR ELECTRICAL INSULATING PROTECTION. USING THE ARC PROTECTIVE BLANKET FOR ELECTRICAL INSULATING PROTECTION CAN RESULT IN SERIOUS INJURY OR DEATH.



M36-2

SWITCHBOARD MATTING

CAT. NO.	DIMENSIONS in. (mm)	WEIGHT lbs. (kgs)
M24-2	1/4 x 24" (6 x 610)	9 (4.1)
M30-2	1/4 x 30" (6 x 762)	12 (5.4)
M36-2	1/4 x 36" (6 x 914)	15 (6.8)
M48-2	1/4 x 48" (6 x 1219)	18 (8.2)
M36-4*	1/2 x 36" x 60 feet long (12 x 914 mm x 18.3 m long)	684 (307.8)

All switchboard matting complies with current ASTM D178 standards

*Sold in full rolls only.

ARC PROTECTION BLANKET - Salisbury by Honeywell arc protection blankets are now available in 4' x 5' and 4' x 8' sizes. Each size is available in 15kA or 40kA ratings. The 15kA blankets include convenient loops, and the 40kA blankets include grommets to easily keep the blanket in place. These new blankets are sold individually or with a storage bag or storage bag and tie-strap kit.

The arc protection blanket is used as a barrier for protection from the explosive and incendiary effects of electrical arcs and flashes. These hazardous electrical discharges can be caused by faults in cables, in cable splices and joints and at transformer terminals. They may also be generated by the operation of switch gear, circuit breakers and lightning arrestors. The blanket can be used for worker protection in underground vaults, switchyards and other locations where electrical equipment poses a risk of exposure to explosive electrical discharges.

MEETS THE ASTM F2676 STANDARD.

NOTE: These products do not eliminate or reduce requirements of proper PPE for arc flash protection

ARC PROTECTION BLANKET

CAT. NO.	DIMENSIONS in. (mm)	DESCRIPTION
ARC45-15	48 x 60 (1219 x 1524)	15kA Rating - navy blue
ARC45-40	48 x 60 (1219 x 1524)	40kA Rating -gray/khaki
ARC48-15	48 x 96 (1219 x 2438)	15kA Rating - navy blue
ARC48-40	48 x 96 (1219 x 2438)	40kA Rating -gray/khaki
ARC142	1 x 42 (25.4 x 1067)	Single Kevlar Strap w/ Buckle
ARC142-K16		Arc48 Strap Kit With 16 Buckles
ARC142-K12		Arc45 Strap Kit With 12 Buckles

EXAMPLE:

-Add suffix "P" to include storage bag. -Add suffix "PS" to include storage bag and tie-straps.

-Add suffix "C" to include P4 canister. -Add suffix "CS" to include P4 canister and tie-straps.

SWITCHBOARD MATTING is placed permanently in front of switchgear, motor control centers and other high voltage apparatus to provide an additional level of protection for electrical workers. Switchboard matting is made from 1/4" (6.4 mm) thick and tested to 20kV to comply with ASTM D178, Class 2 specifications. The corrugated surface acts as a safety tread while reducing the possibility of metal particles becoming embedded. Class 2, switchboard matting is made in 25 yard rolls which can be custom cut to specified lengths as per customer request. Class 4 is sold in full 60' rolls only.

Class 2 Maximum Use Voltage: 17,000 VAC

Class 4 Maximum Use Voltage: 36,000 VAC



LOW-VOLT BLANKETS AND ACCESSORIES

SHOCK PROTECTION

ROLL BLANKETS - Salisbury has gone to great lengths to protect workers from low voltage electrical hazards by now offering insulating blanket material on a roll. Salisbury's insulating roll blankets, made from a high strength fabric reinforced Type II rubber, allow workers to custom-cut blankets to fit each application at the job site. This minimizes the number of different low voltage blanket sizes and shapes that would otherwise need to be carried from job to job.

All classes of roll blankets are easy to cut and flexible to -40°F. Highly puncture and tear resistant, each class of blanket is also flame (self-extinguishing), oil and ozone resistant. Each comes in a convenient 36" wide roll, 30 feet in length and in unique colors making it easy to identify and highly visible in the work area.

CLEAR PVC ROLL BLANKETS - Salisbury's roll blanket line includes a Class I clear PVC material that permits complete visibility, yet provides the necessary insulating properties meeting ASTM F1742 standards.

CLASS 0 YELLOW LOW VOLTAGE INSULATING BLANKETS - Low voltage Insulating Blankets are made of Type II SALCOR®, ozone resistant rubber and are yellow. Insulating blankets are available with or without hook and pile. These blankets are Class 0 and have a maximum use of 1000VAC. Covering energized equipment is easier than ever using these blankets. Featuring one inch strips of hook and pile double stitched to the blanket with nylon thread, making the installation and removal safe and fast.

ROLL BLANKETS

CAT. NO.	DESCRIPTION	MAX USE	DIMENSIONS ft. (m)
RLB00	Class 00 brown	500 VAC	3' x 30' (.9 x 9)
RLB0	Class 0 yellow	1000 VAC	3' x 30' (.9 x 9)
RLB1	Class 1 yellow / orange	7500 VAC	3' x 30' (.9 x 9)
RLBPVC1	Class 1 clear PVC	7500 VAC	3' x 30' (.9 x 9)

BLANKET CLAMP PIN

CAT. NO.	DESCRIPTION	LENGTH in. (mm)	JAW OPENING in. (mm)	WEIGHT lbs. (kgs)
21	Nylon w/ pin boots	9.5 (241)	5 (127)	.25 (.11)
MB6	Magnetic blanket button	-	-	.044 (.2)

YELLOW LOW VOLTAGE INSULATING BLANKETS

CAT. NO.	DESCRIPTION	TYPE	SIZE in. (mm)	WEIGHT EA. lbs. (kgs)
1212YLV	Class 0 yellow zip	II	12x12 (305x305)	1 (.45)
1212YLVNV	Class 0 yellow plain	II	12x12 (305x305)	1 (.45)
1236YLV	Class 0 yellow zip	II	12x36 (305x914)	1.5 (.48)
1236YLVNV	Class 0 yellow plain	II	12x36 (305x914)	1.5 (.48)
1818YLV	Class 0 yellow zip	II	18x18 (457x457)	1.1 (.48)
1818YLVNV	Class 0 yellow plain	II	18x18 (457x457)	1.1 (.48)

NOTE: Other sizes are available, contact your local Salisbury representative for availability.

BLANKET FASTENERS


Blanket Clamp Pins can be effectively used to hold insulating blankets in place. Blanket pins are made of fiberglass reinforced nylon and have molded rubber tips to increase slip resistance.

Magnetic Blanket Buttons are designed for use in eyelets of insulating blankets when covering energized portions in hard to cover areas. Four permanent, floating magnets are mounted between nickel-plated steel plates. May be applied manually, wearing rubber gloves, or with a clampsticks.

RLB1



RLBPVC1



21




MB6 (1)




RLB0 Roll Blanket

1212YLV

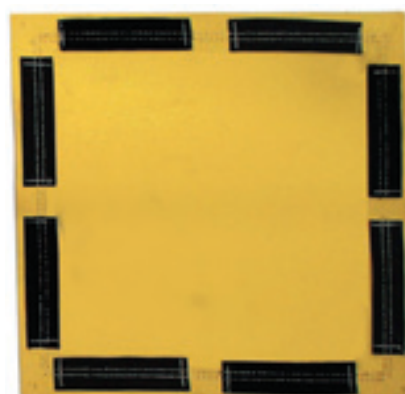

INSULATED RESCUE HOOK AND STATIC DISCHARGE STICK

SHOCK PROTECTION

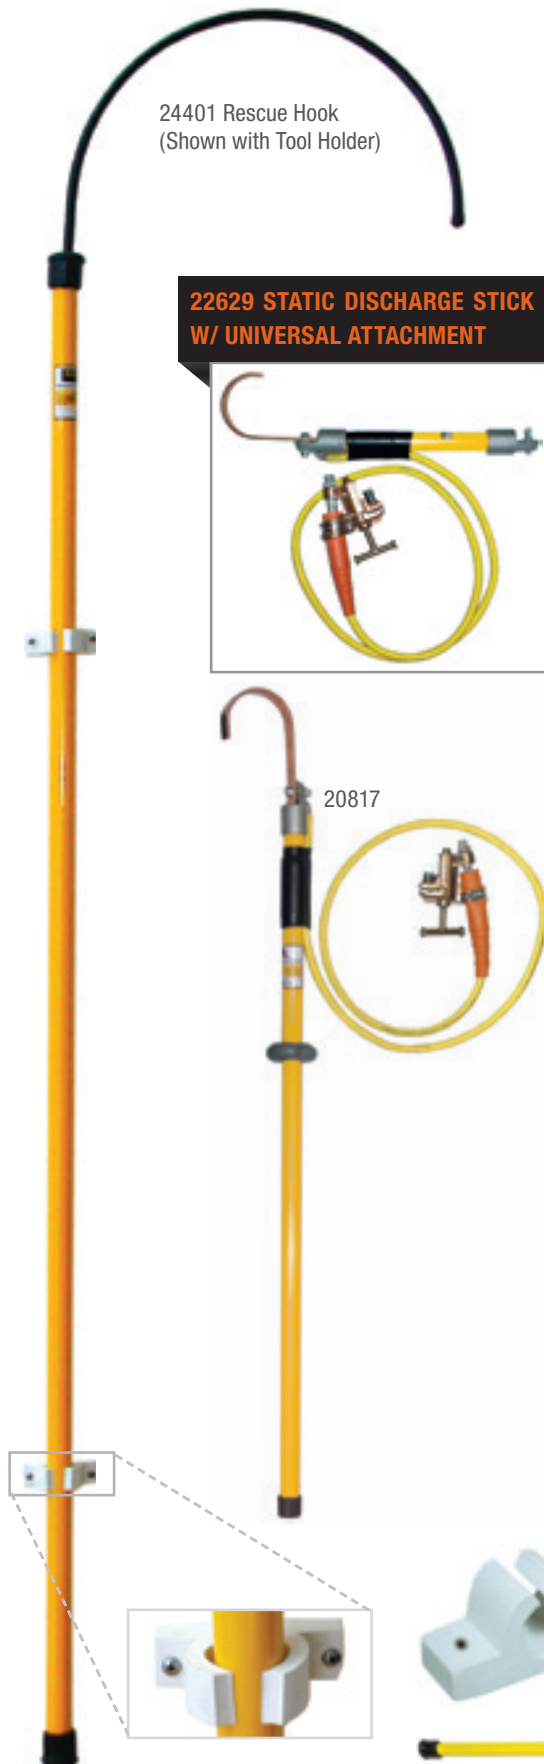

24401 Rescue Hook
(Shown with Tool Holder)

22629 STATIC DISCHARGE STICK
W/ UNIVERSAL ATTACHMENT

20817

INSULATED RESCUE HOOK - Salisbury's insulated rescue hook is an invaluable tool for any workplace. It is used to release a victim from contact. Confined spaces, in vaults, or just near electrical cabinets and switch gear are some of the places where this tool is a must. Insulated rescue hooks feature a foam-filled, fiberglass reinforced handle for superior electrical insulation and a coated, heat treated body hook with an 18" opening and are made in accordance with ASTM Standard F711. The stick is available in the standard lengths of 6 and 8 feet. Other lengths are available as a special order. Contact us with your requirements.

INSULATED RESCUE HOOK

CAT. NO.	DIMENSIONS ft. (m)	WEIGHT lbs. (kgs)
24400	3' (0.92) Length	3.4 (1.5)
24401	6' (1.8) Length	4.5 (2)
24403	8' (2.4) Length	5.5 (2.5)

STATIC DISCHARGE STICK - The Static Discharge Stick is designed to safely remove the static charge after de-energizing. This tool is pre-assembled and includes a brass alloy "U" hook, closed cell foam-filled tubular fiberglass switch stick made in accordance with ASTM Standard F711. Static discharge sticks have 6 feet of copper grounding cable attached to a Salisbury 1814 flat jaw, grade 3, bronze serrated clamp with strain relief.

STATIC DISCHARGE STICK

CAT. NO.	CABLE LENGTH ft. (m)	DESCRIPTION	WEIGHT lbs. (kgs)
20817	6 (1.8)	Static discharge stick 4' (1.2m) length	8 (3.6)
22629	6 (1.8)	Static discharge stick w/ universal attachment 1' (0.3m) length	38 (0.17)

TOOL HOLDER SALCOR® Tool Holders secure tools to trailers, compartments and tool rooms. Great for holding rescue hooks and static discharge sticks. 12 per package.

TOOL HOLDER

CAT. NO.	DESCRIPTION	WEIGHT CN lbs. (kgs)
1192	1.25 (32 mm) I.D. Tool holder	3.5 (1.6)



1192

24401

VOLTAGE DETECTORS

SHOCK PROTECTION



SELF TESTING VOLTAGE DETECTOR KITS

CAT. NO.	SETTINGS
4556	1-4544 Detector 240V to 230kV, 1-21517 Case, 1-2500 clampstick adapter
4667	1-4644 Detector 240V to 500kV, 1-21517 Case, 1-2500 clampstick adapter
4769	1-4744 Detector 240V to 69kV, w/ URD test point setting 15, 25,35kV, 1-21517 Case, 1-2500 clampstick adapter

SELF TESTING VOLTAGE DETECTOR KITS - Salisbury's self-testing voltage detectors allow testing to be continuous and automatic. An intermittent flash and beep confirms the detector is functioning properly.

Self-testing voltage detectors are used to verify live or de-energized conductors. These testers may be used with insulating rubber gloves or hot sticks using the splined universal end fitting. Testers indicate voltage with an extra bright LED light and a distinctive audible signal. It is recommended that the tester be moved closer to the conductor until a warning is indicated, or it touches the conductor, apparatus, or test point. Each tester includes three "C" batteries.

The need for additional PPE can be minimized by confirming that there is no electrical hazard present before work is performed. This can be determined by using a Salisbury voltage detector attached to an insulating hot stick of a length long enough to keep the worker outside of the arc flash boundary.

The Salisbury voltage detector alarms in the proximity of electric fields, so that it is not necessary to make physical contact with the equipment being checked. It is made of non-conductive materials, meaning that it will not conduct electricity nor will it cause an arc flash, even if contact with energized equipment is made.

GENERAL CLEANERS & GLOVE DUST

RUB-OUT® HAND CLEANER & TOWELETTES

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
1451	RUB-OUT® 16 oz. (.45kg can) 12/pack	16 (7.3)
1452	RUB-OUT® 4.5 lb. (2kg cans) 6/pack (12.7)	28
1453	RUB-OUT® dispenser for 4,5 lb. (2kg) can	1 (.5)
1460	RUB-OUT® towelettes tub of 60 towelettes	2.2 (1)
1461	RUB-OUT® towelettes carton of 100 single towelettes	2.4 (1.1)

TEN-FOUR® GLOVE DUST

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
10-4	12, 5 oz. Squeeze bottles	5.5 (12)
10-4-4QT	4 qt. Bulk, single	8 (19)

RUB-OUT® HAND CLEANER & TOWELETTES -

RUB-OUT® is a non-petroleum-based hand cleaner. Rub-out dissolves and removes grease, oil, ink, tar, pipe dope, creosote, paint and more without harming rubber or SALCOR® products. It cleans with or without water and contains natural skin conditioners that leave a fresh citrus scent. Salisbury's RUB-OUT® towelettes work fast to loosen, dissolve and absorb dirt and grease.

Our powerful yet safe cleaning agents work together with an absorbent, non-scratching abrasive cleaning towel. As a result, hands are clean and with a pleasant fragrance. After cleaning your hands, there is enough absorbency to clean your tools and other surfaces with the same towel. These shop size durable towels quickly remove tough-to-clean substances including lubricants, tar, oils, wax, caulk and much more. Put Salisbury degreasing strength to work for you.

TEN-FOUR® GLOVE DUST is a cooling, frictionless powder that absorbs moisture and perspiration when wearing rubber gloves. The 5-oz. bottle easily fits in a pocket or glove bag. The 4-quart bulk package is used in test labs as a dusting powder.





WHENEVER POSSIBLE, ALWAYS DE-ENERGIZE EQUIPMENT BEFORE WORKING ON OR AROUND THEM.

IMPORTANT SAFETY INFORMATION FOR PPE

ARC PROTECTION CLOTHING REQUIREMENTS

OSHA 29 CFR 1910.269 (l)(6)(III) "The employer shall ensure that each employee who is exposed to the hazards of flames or electric arcs does not wear clothing that, when exposed to flames or electric arcs, could increase the extent of injury that would be sustained by the employee."

Clothing made from acetate, nylon, polyester, acrylic, polyethylene and rayon, in either pure or blended forms, should not be worn when working in hazardous environments.

ASTM F1506 details the specifications of a textile to be used by an electrical worker as a means of electrical arc protection. A garment must include a label, which states the following information: Tracking I.D. Code, Meets ASTM F1506, Manufacturer's name, Care Instructions & Fiber Content, Size and "Arc Rating" - ATPV or EBT.

ASTM F2178 is the test method used to measure arc rated products intended to protect the face of workers exposed to electrical arcs.

DANGERS OF ARC FLASH

Even relatively low voltages can be fatal. For example, electrical shocks produced from common 60 hz AC power passing from hand to foot for a duration of one second can have the following effects:

EFFECTS OF ELECTRICAL SHOCK

CURRENT	EFFECTS
1-3Milliamps	Tingling Sensation
3+Milliamps	Shock (pain)
10+Milliamps	Muscular Contractions (can't let go)
30+Milliamps	Respiratory Paralysis (may be fatal)
60+Milliamps	Ventricular Fibrillation (usually fatal)
4+Amps	Heart Paralysis (fatal)
5+Amps	Tissue Burning (fatal, vital organs destroyed)

ALWAYS PERFORM A HAZARD ASSESSMENT

The NFPA 70E Standard for Electrical Safety in the Workplace requires employers to perform an Electrical Arc Hazard Assessment. Each situation is unique and needs to be evaluated on its own merits. ASTM F1959 details the standardized test that must be used to determine the thermal protective value of textiles in an electric arc application.

Clothing selected for a particular application shall have an arc thermal performance value of (EBT or ATPV) higher than the potential hazard to prevent the onset of 2nd degree burns.

INTRODUCING THE NEWEST PRODUCT TO THE SALISBURY BY HONEYWELL PRO-WEAR® ARC FLASH CLOTHING LINE. The new Premium Light Weight arc flash garment maintains the high levels of protection you've come to expect from Salisbury by Honeywell while greatly increasing user comfort. The Pro-Wear® Premium Light Weight arc flash garment is made from a synthetic blend of fibers that maintain their arc rated properties for the life of the garment. The synthetic blend of fabrics is the lightest in the industry which means the user will experience greater comfort and less heat stress. Compared with the typical standard weight 40 calorie arc flash garment, the new Pro-Wear® Premium Light Weight has a total fabric weight that is on average 50% lighter. To further increase user comfort, Salisbury by Honeywell also offers the Pro-Hood® with integrated cooling option using the new premium light weight fabrics. As with all of Salisbury by Honeywell's other arc flash clothing, the new Pro-Wear® Premium Light Weight meets NFPA 70E and ASTM F1506 standards.

ARC FLASH & GLOVE INFORMATIONAL VIDEOS ARE AVAILABLE. VISIT [SALISBURYBYHONEYWELL.COM](https://salisburybyhoneywell.com) FOR MORE INFORMATION.

**SALISBURY
PRO-WEAR®**
Color Code

**PPE
Category**

Clothing Description
(Typical Number of clothing layers given in parentheses)

**Minimum
Arc Rating
of PPE**

Navy Blue	2	Arc rated long-sleeve shirt and pants or arc rated coverall plus arc rated face shield with a balaclava or switching hood (1 or 2)	8 cal/cm ²
Royal Blue	3	Arc rated long-sleeve shirt, pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	25 cal/cm ²
Gray / Khaki	4	Arc rated long-sleeve shirt and pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	40 cal/cm ²
Green	4	PLT Arc rated long-sleeve shirt and pants and coverall and jacket and pants or total arc rated clothing system with hood (2 or 3)	40 cal/cm ²

SALISBURY INSULATED HAND TOOLS

Every insulated hand tool is rated for exposure up to 1000VAC and dielectrically tested at 10,000VAC. These tools meet or exceed current ASTM F1505-07 and IEC 900 Standards for Insulated Hand Tools. These tools will help you to be compliant with OSHA 29 CFR 1910 Subpart S and NFPA 70E.

TO FULLY COMPLY WITH OSHA 1910.333 (C)(2) AND NFPA 70E, INSULATED HAND TOOLS MUST BE USED. A COMPLETE INSULATED TOOL PROGRAM SHOULD BE IN PLACE TO MEET THESE STANDARDS.

The insulating material used is impact resistant and flame retardant. The two-color insulation makes inspection easier which adds to the overall safety. If the yellow under layer is showing, the tool may no longer be insulated properly and should be considered for electrical retesting.

Meets IEC 900 Standard for Insulated Hand Tools
Exceed current ASTM F1505-07 Standards for Insulated Hand Tools
Helps Meet OSHA Requirements
Meets NFPA 70E Requirements
Tested to 10,000 VAC and Rated for 1,000 VAC Maximum Exposure
Impact Resistant & Flame Retardant Two-Color Insulating Material



**OFFERING OVER
2,000 TOOLS!**


**SEE OUR NEW NON-SPARKING
TOOL OFFERING SEE PAGE 84.**



WARNING: SALISBURY INSULATED TOOLS ARE TO BE USED AS SECONDARY PROTECTION AND ARE NOT INTENDED TO BE USED IN PLACE OF OTHER PERSONAL PROTECTIVE EQUIPMENT. WHENEVER POSSIBLE, ALWAYS DE-ENERGIZE LINES BEFORE WORKING ON OR AROUND THEM. ALTHOUGH THE INSULATION ON SALISBURY TOOLS IS IMPACT RESISTANT AND FLAME RETARDANT, EACH TOOL SHOULD BE INSPECTED PRIOR TO EACH USE FOR CRACKS, CUTS, OR OTHER DAMAGE. SHOULD THE YELLOW INSULATION BECOME VISIBLE THROUGH THE ORANGE OUTER LAYER, DISCONTINUE USE IMMEDIATELY.



INSULATED HAND TOOL MARKINGS

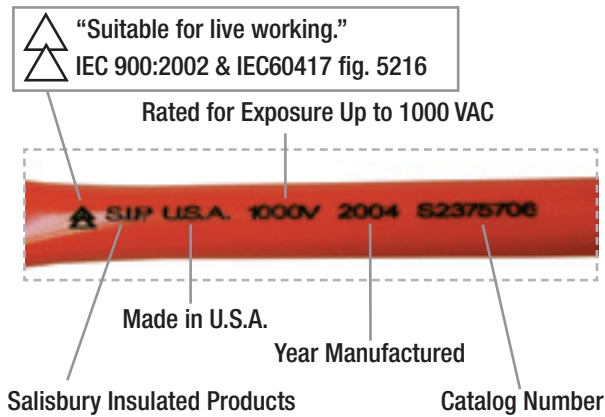

**OFFERING OVER
2,000 TOOLS!**

NOTE: Contact your local Salisbury by Honeywell Representative for your tool needs not seen here. Our tool line is capable of customizing and supplying almost any tool with protection up to 1000V. Salisbury can also supply customized tool kits and insulate almost any customer tools if necessary.



S101



S10TK23

THIS SET IS DESIGNED FOR
USE IN TIGHT WORK SPACES.

TELECOMMUNICATION TOOL BOX

CAT. NO.	DESCRIPTION
S101	16 pcs. Includes: 3/8" Dr ratchet 3/8" Drive torque ratchet 10" long 30-150 in/lb 3" Extension Regular sockets 12pt: 3/8", 7/16", 1/2", 9/16" 5/8" Deep socket 3/8" drive 9" Lineman Pliers 6" Needle nose Pliers 8" Slip joint Pliers Slotted screwdrivers: 3/16 x 4", 1/4 x 6", 5/16 x 6", 3/8 x 8" #2 x 6" Phillips screwdriver In a high impact plastic tool box

TELECOMMUNICATION TOOL POWER CONNECTING KIT

CAT. NO.	DESCRIPTION
S10TK23	24 pcs. Includes: Close quarters socket set 3/8" drive with ratchet 3" Extension Regular sockets 12pt: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" 6" Adjustable wrench Nut driver set 3": 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2" In a high impact plastic tool box

INSULATED TOOL KITS



TK9

TK30



S10TK40



S10TK25



INSIDE MAINTENANCE BOX

CAT. NO.	DESCRIPTION
S10TK40	40 pcs. Includes: Narrow tip screwdrivers: 3/16 x 6", 1/4 x 6" Slotted tip screwdriver: 3/8 x 6" Phillips screwdrivers: #1 x 3", #2 x 6" Nutdrivers: 3/16 x 3", 1/4 x 3", 5/16 x 3", 11/32 x 3", 3/8 X 3", 7/16 x 3", 1/2 x 3", 9/16 x 3" Torque wrench 30 - 150 in/lb 3/8" Drive reversible ratchet 3", 6" and 12" Extensions, 3/8" drive 8 Pcs. 3/8" to 13/16" Deep 12 pt. socket set 8 Pcs. 3/8" to 13/16" Box end wrench set 6" Type "I" Hex wrenches, long arm: 3/16", 1/4", 5/16", 3/8" 10" Water pump Pliers In a high impact plastic tool box

DELUXE MAINTENANCE TOOL KIT

CAT. NO.	DESCRIPTION
TK30	29 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 6", 1/4 x 4" Phillips screwdriver: #1 x 3", #2 x 6" Torque Wrench 3/8" drive 10" Long 30-150 In/Lb 3/8" Drive reversible ratchet 3" and 6" Extensions, 3/8" drive, 4nm -23nm 8 pcs. 3/8" to 13/16" Deep 12 pt. Socket set, 3/8" drive 8 pcs. 3/8" to 13/16" Box end wrench set 7-1/2" Diagonal cutting Pliers 8" Needle nose Pliers 9" Lineman Pliers Mini flashlight In a high impact plastic tool box

BASIC ELECTRICIAN ROLL

CAT. NO.	DESCRIPTION
TK9	9 pcs. Includes: Slotted screwdrivers: 3/16 x 4", 3/16 x 6", 1/4 x 6" Phillips screwdrivers: #1 x 3", #2 x 4" 8" Needle nose Pliers 7-1/2" Diagonal cutting Pliers 9" Lineman Pliers Combination stripper / crimper Pliers In a tool roll bag

OUTSIDE MAINTENANCE BOX

CAT. NO.	DESCRIPTION
S10TK25	24 pcs. Includes: 1/4 X 6" Narrow tip screwdriver #2 x 8" Phillips screwdriver Nutdrivers: 3/8 x 3", 7/16 x 3", 1/2 x 3", 9/16 x 3" Torque wrench 30 - 150 in/lb Reversible ratchet 3/8" drive 3", 6" and 12" Extensions, 3/8" drive 8 Pcs. 3/8" To 13/16" deep 12 pt. Socket set 6" Type "I" Hex wrenches, long arm: 3/16", 1/4", 5/16", 3/8" 10" Water pump Pliers In a high impact plastic tool box



TK60



S10TK12



TK30ETK

HOT BOX TOOL KIT WITHOUT TORQUE WRENCH

CAT. NO.	DESCRIPTION
TK60E	59 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 4", 3/16 x 6", 1/4 x 6", 5/16 x 6" Phillips screwdriver: #2 x 4", #2 x 8" Nutdrivers: 3/16, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2 Reversible ratchet, 3/8"dr 3" and 6" Extensions, 3/8"dr 10 pcs 5/16" to 7/8", 3/8"Dr socket set 11 pcs 3/8" to 1" Box end wrench set 14 pcs. 1/16" to 1/2", 6" Long arm, type "I" hex wrench set 7-1/2" Diagonal cutting Pliers 8" Needle nose Pliers 9" Lineman Pliers 9-1/2" Cable cutting Pliers 10" Water pump Pliers Combination stripper / crimper Pliers In a plastic box, including tool pouch rolls

HOT BOX TOOL KIT

CAT. NO.	DESCRIPTION
TK60	60 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 4", 3/16 x 6", 1/4 x 6", 5/16 x 6" Phillips screwdrivers: #2 x 4", #2 x 8" Nutdrivers: 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2" Torque wrench 30 - 150 in/lb; 3/8"Dr, reversible ratchet 3" and 6" Extensions, 3/8"dr 10 pcs. 5/16" to 7/8", 3/8"Dr socket set 11 pcs. 3/8" to 1" Box end wrench set 14 pcs. 1/16" to 1/2", 6" Long arm, type "I" hex wrench set 7-1/2" Diagonal cutting Pliers , 8" Needle nose Pliers 9" Lineman Pliers 9-1/2" Cable cutting Pliers 10" Water pump Pliers Combination stripper/crimper Pliers In a plastic box, including tool pouch rolls

ELECTRICIAN'S TOOL KIT

CAT. NO.	DESCRIPTION
TK30ETK	30 pcs. Includes: 9" Lineman Pliers 8" HD slip joint Pliers with cutting shear Crimping tool 10" Tongue and groove Pliers (waterpump) Slotted screwdrivers: 3/16" x 4", 1/4" x 4", 1/4" x 6", 5/16" X 6", 3/8" x 8", 3/16" x 6" Phillips screwdrivers: #1 x 3", #2 x 4" Nut drivers: 1/4" x 3", 5/16" x 3", 3/8" x 3", 7/16" x 3", 1/2" X 3", 3/16" x 3", 11/32" x 3" 8" Long needle nose Pliers with side cutter 7" Box joint cutting Pliers 9-1/2" Pliers cutting Pliers 12" Tong and groove (waterpump) 6" Flat nose Pliers Long arm, type "t" hex wrenches: 3/16" 6", 1/4" 6", 5/16" 6", 3/8" 6", 7/16" 6", 1/2" 6" In a high impact plastic tool box

HVAC TOOL KIT

CAT. NO.	DESCRIPTION
S10TK12	HVAC tool kit - 23 pcs. Includes: Slotted screwdrivers: 3/16 x 4", 3/16 x 6", 1/4 x 4", 1/4 x 6", 5/16 x 6", 3/8 x 8" Phillips screwdrivers: #1 x 3", #2 x 4" Nutdrivers: 3/16 x 3", 1/4 x 3", 5/16 x 3", 11/32 x 3", 3/8 X 3", 7/16 x 3", 1/2 x 3" Type "I" hex wrenches, long arm: 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" 8" Long needle nose Pliers w/ side cutter 12" Rectangular inspection mirror In a plastic box, including tool pouch rolls

INSULATED TOOL KITS



TK12HB
Electrical Kit for
Hybrid Vehicles



TK24SS
Substation Kit



TK16MT
Meter Kit



TK15LM
Lineman's Secondary Distribution Tool Kit



TK13TC SERVICE
TOOL KIT for Unigy™ I
& II Battery System

1000V ELECTRICAL INSULATED TOOL KIT FOR HYBRID VEHICLES

Do you have the necessary tools to guard against the dangers of electrocution from hybrid-electric vehicles?

Mechanics and firefighters should be cautious when working on hybrid vehicles because hybrid vehicles use a combination of a gasoline motor and a high voltage electric motor. The electric motor operates on voltages as high as 500 volts. That's more than eight times the lethal voltage! Don't be caught worrying about the "what ifs" while working on these vehicles.

1000V UTILITY INSULATED HAND TOOL KITS

Salisbury makes working in the field even easier with these three utility tool kits.

Salisbury offers three specially designed utility insulated hand tool kits. These convenient tool kits include everything you need for routine utility applications. Salisbury is proud to offer a 24 piece substation tool kit, a 16 piece meter tool kit and a 15 piece Lineman's Secondary Distribution Tool Kit. Each kit includes easy storage tool rolls and light weight tool box.

CAT. NO.	DESCRIPTION
TK12HB	Hybrid Tool Kit; Includes: 10" crimping tool, 9" side cutter, 8" slip joint cutter, 6" chain nose Pliers, 6" diagonal Pliers, 10" water pump Pliers, screwdrivers: #1 x 4, #2 x 4, 3/16" x 4, 1/4" x 4, 1/4" x 6, 5/16" x 6 and tool box
TK24SS	Substation Kit; Includes: (5) 3/8" - 3/4" box wrenches, (5) 3/8" - 3/4" ratcheting box wrenches, (5) 3/8" - 3/4" std. Sockets, 3/8" ratchet with 3" & 6" extension, #1 x 3", #2 x 6", #3 x 6" phillips screwdrivers, skinning knife, (2) tool rolls and sturdy tool box
TK16MT	Meter Kit; Includes: 9" lineman's Pliers, 7" diagonal cutters, 8" long nose Pliers, 5/16", 3/8", 1/2" nut drivers, #1 x 3", #2 x 4", #3 x 6" phillips screwdrivers, 1/8" x 2", 1/4" x 6", 3/16" x 4", 3/16" x 6" slotted screwdrivers, fuse puler, (2) tool rolls and sturdy tool box
TK15LM	Lineman's Secondary Distribution Tool Kit; Includes: (9) 7/16" - 15/16" ratcheting box wrenches, skinning knife, 3/8" x 12" slotted screwdriver, 30" bolt cutter, 12" "v" groove Pliers, 9" spring loaded lineman's Pliers, 10" adj. Wrench, (2) tool rolls and sturdy tool box
TK13TC	Service Tool Kit for Unigy™ I & II Battery System; Includes: 1/4" Dr. 30-150 In./Lbs., 7/16" ratcheting box wrench (2), 5/16" x 1/4" & 7/16 x 1/4" Dr. unbooted sockets, 6" x 1/4" Dr. extension, 3/8" x 1/4" & 7/16" x 1/4" Dr. socket, valve shroud removal tool, 1/4" Dr. 1-36 in./lbs. torque screwdriver, 17 mm x 1/4" Dr. allen socket, 17 mm sa allen wrench stub, 1/4" Dr. ratchet 4.5", 7/16" ratchet box torque wrench preset 125 in./lbs., 10 pocket nylon tool roll, 17 mm x 1/4" Dr. allen socket

METRIC INSULATED TOOL KITS



S10TK12M



TK60M



TK30M



S10TK25M

METRIC HVAC TOOL KIT

CAT. NO.	DESCRIPTION
S10TK12M	HVAC tool kit; 23 pcs. includes: Slotted screwdrivers: 3/16 x 4", 3/16 x 6", 1/4 x 4", 1/4 x 6", 5/16 x 6", 3/8 x 8" Phillips screwdrivers: #1 x 3", #2 x 4" Nutdrivers: 3" long: 5mm, 6mm, 7mm, 8mm, 10mm, 12mm Type "I" hex wrenches, long arm: 5mm, 6mm, 7mm, 8mm, 10mm, 12mm 8" Long needle nose Pliers w/ side cutter 12" Rectangular inspection mirror In a plastic box, including tool rolls

METRIC OUTSIDE MAINTENANCE BOX

CAT. NO.	DESCRIPTION
S10TK25M	24 pcs. Includes: 1/4 x 6" Narrow tip screwdriver #2 X 8" Phillips screwdriver Nutdrivers: 9mm x 3", 10mm x 3", 11mm x 3", 12mm x 3" Torque wrench 30 - 150 in/lb 3nm-23nm Reversible ratchet 3/8" drive 3", 6" And 12" extensions, 3/8" drive 8 pcs. 10mm-21mm Deep 12 pt. Socket set Type "I" hex wrenches, long arm: 5mm, 6mm, 8mm, 10mm 10" Water pump Pliers In a high impact plastic tool box

METRIC DELUXE MAINTENANCE TOOL KIT

CAT. NO.	DESCRIPTION
TK30M	29 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 6", 1/4 x 4" Phillips screwdriver: #1 x 3", #2 x 6" Torque Wrench 3/8" drive 10" Long 30-150 In/Lb 3/8" Drive reversible ratchet 3" and 6" Extensions, 3/8" drive, 4nm -23nm 8 pcs. 12 pt. Socket set, 3/8" drive: 10mm, 11mm, 12mm, 14mm, 16mm, 18mm, 19mm, 21mm 8 pcs. Box end wrench set: 10mm, 11mm, 12mm, 14mm, 16mm, 18mm, 19mm, 21mm 7" Diagonal cutting Pliers 8" Needle nose Pliers 9" Lineman Pliers Mini flashlight In a high impact plastic tool box

METRIC HOT BOX TOOL KIT

CAT. NO.	DESCRIPTION
TK60M	60 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 4", 3/16 x 6", 1/4 X 6", 5/16 x 6" Phillips screwdrivers: #2 x 4", #2 x 8" 3" Long nutdrivers Torque wrench 30 - 150 in/lb; 4nm-23nm 3/8" Dr, reversible ratchet 3" and 6" Extensions, 3/8" dr 10 pcs. 8mm-22mm, 3/8" Dr socket set 11 pcs. 10mm-27mm Box end wrench set 14 pcs. 1.5mm-12mm Hex wrench set 7-1/2" Diagonal cutting Pliers 8" Needle nose Pliers 9" Lineman Pliers 9-1/2" Cable cutting Pliers 10" Water pump Pliers Combination stripper/crimper Pliers In a plastic box, including tool rolls

METRIC HOT BOX TOOL KIT WITHOUT TORQUE WRENCH

CAT. NO.	DESCRIPTION
TK60EM	59 pcs. Includes: Slotted screwdrivers: 1/8 x 2", 3/16 x 4", 3/16 x 6", 1/4 x 6", 5/16 x 6" Phillips screwdriver: #2 x 4", #2 x 8" 3" Long nutdrivers: 5mm, 6mm, 7mm, 8mm, 9mm, 11mm, 12mm Reversible ratchet, 3/8" dr 3" and 6" Extensions, 3/8" dr 10 pcs 8mm-22mm, 3/8" Dr socket set 11 pcs 10mm-27mm Box end wrench set 14 pcs. 1.5mm-12mm Hex wrench set 7-1/2" Diagonal cutting Pliers 8" Needle nose Pliers 9" Lineman Pliers 9-1/2" Cable cutting Pliers 10" Water pump Pliers Combination stripper / crimper Pliers In a plastic box, including tool rolls

METRIC INSULATED TOOL KITS



TK30ETKM



S10TK23M

THIS SET IS DESIGNED FOR
USE IN TIGHT WORK SPACES.



S10TK40M



S101M

METRIC TELECOMMUNICATION TOOL POWER CONNECTING KIT

CAT. NO.	DESCRIPTION
S10TK23M	23 pcs. Includes: Metric close quarters socket set 3/8" drive with ratchet 3" & 6" Extension Regular sockets 12pt: 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm 6" Adjustable wrench Nut driver set 3": 5mm, 6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm In a high impact plastic tool box

METRIC INSIDE MAINTENANCE BOX

CAT. NO.	DESCRIPTION
S10TK40M	39 pcs. Includes: Narrow tip screwdrivers: 3/16 x 6", 1/4 x 6" Slotted tip screwdriver: 3/8 x 6" Phillips screwdrivers: #1 x 3", #2 x 6" Nutdrivers: 3" long: 5mm, 6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm Torque wrench 30 - 150 in/lb 3nm-23nm 3/8" Drive reversible ratchet 3", 6" and 12" Extensions, 3/8" drive 8 pcs. 10mm-21mm Deep 12 pt. Sckt set 8 pcs. 10mm-21mm Box end wrench set Type "I" hex wrenches, long arm: 5mm, 6mm, 8mm, 10mm 10" Water pump Pliers In a high impact plastic tool box

METRIC ELECTRICIAN'S TOOL KIT

CAT. NO.	DESCRIPTION
TK30ETKM	30 pcs. Includes: 9" Lineman Pliers 8" hd slip joint Pliers with cutting shear Crimping tool 10" Tongue and groove Pliers (waterpump) Slotted screwdrivers: 3/16" x 4", 1/4" x 4", 1/4" x 6", 5/16" x 6", 3/8" x 8", 3/16" x 6"; Phillips screwdrivers: #1 x 3", #2 x 4" Nut drivers: 5mm x 3", 6mm x 3", 7mm x 3", 8mm x 3", 9mm x 3", 11mm x 3", 12mm x 3"; 8" Long needle nose Pliers with side cutter 7" Box joint cutting Pliers 9-1/2" Pliers cutting Pliers 12" Tong and groove (waterpump) 6" Flat nose Pliers Long arm, type "T" hex wrenches: 4mm x 6", 5mm x 6", 6mm x 6", 8mm x 6", 10mm x 6", 12mm x 6" In a high impact plastic tool box

METRIC TELECOMMUNICATION TOOL BOX

CAT. NO.	DESCRIPTION
S101M	16 pcs. Includes: 3/8" Dr ratchet 3/8" Drive torque ratchet 10" long 30-150 in/lb 3nm-23nm 3" Extension Regular sockets 12pt: 10mm, 11mm, 12mm, 14mm, 16mm 16 mm Deep socket 3/8" drive 9" Lineman Pliers 6" Needle nose Pliers 8" Slip joint Pliers Slotted screwdrivers: 3/16 x 4", 1/4 x 6", 5/16 x 6", 3/8 x 8" #2 X 6" Phillips screwdriver In a high impact plastic tool box

SCREWDRIVERS & NUTDRIVERS

All Salisbury insulated screwdrivers are two color insulated for added safety. High alloy steel blade for maximum strength and ergonomic handle for comfort.

INSULATED SLOTTED SCREWDRIVERS

WITH CUSHION GRIP

Available in these blade widths:

1/8" - 3/8"



INSULATED TORX SCREWDRIVERS

Available in these size ranges:

T10 - T50



INSULATED PHILLIPS & ROBERTSON SCREWDRIVERS

WITH CUSHION GRIP

Phillips available in these sizes:

#0 X 2"
#1 X 3"
#2 X 1-1/2"
#2 X 4"
#2 X 6"
#3 X 6"
#4 X 8"

Robertson available in these sizes:

#1 X 4"
#2 X 4"
#2 X 8"
#3 X 4"



A wide variety of torx screwdrivers are available upon request.

INSULATED SLOTTED SCREWDRIVERS

WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S2376802	1/8" X 2"
S2376806	1/8" X 6"
S2375904	3/16" X 4"
S2375906	3/16" X 6"
S2375908	3/16" X 8"
S2375910	3/16" X 10"
S2375704	1/4" X 4"
S2375705	1/4" X 6"
S2375706	5/16" X 6"
S2375708	3/8" X 8"
S2375710	3/8" X 10"
S2375712	3/8" X 12"

INSULATED TORX SCREWDRIVERS

CAT. NO.	DESCRIPTION
S2341410	T10 X 3" Blade
S2341415	T15 X 3" Blade
S2341420	T20 X 3" Blade
S2341425	T25 X 3" Blade
S2341427	T27 X 4" Blade
S2341430	T30 X 4" Blade
S2341440	T40 X 6" Blade
S2341445	T45 X 6" Blade
S2341450	T50 X 6" Blade

INSULATED PHILLIPS SCREWDRIVERS

WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S2376302	#0 X 2" Phillips
S2376103	#1 X 3" Phillips
S2376103A	#1 X 6" Phillips
S2376102	#2 X 1-1/2" Phillips
S2376104	#2 X 4" Phillips
S2376105	#2 X 6" Phillips
S2376105A	#2 X 8" Phillips
S2376106	#3 X 6" Phillips
S2376108	#4 X 8" Phillips

INSULATED ROBERTSON SCREWDRIVERS

WITH CUSHION GRIP

S2377610	#1 X 4" Robertson
S2377611	#1 X 8" Robertson
S2377620	#2 X 4" Robertson
S2377621	#2 X 8" Robertson
S2377630	#3 X 4" Robertson
S2377631	#3 X 8" Robertson


MAGNETIC BIT TIP SCREWDRIVER

CAT. NO.	DESCRIPTION
S2742614	3/16", 1/4", #1, #2 Bits

SCREWDRIVER & NUTDRIVER KIT SETS AND TOOLS

INSULATED NUTDRIVERS

WITH CUSHION GRIP

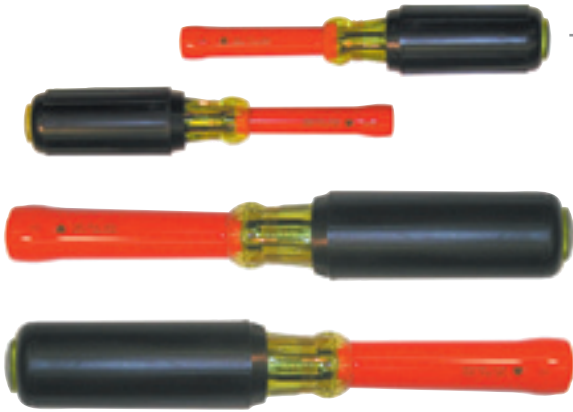

3" Lengths available in these sizes

3/16"	5mm
1/4"	6mm
5/16"	7mm
11/32"	8mm
3/8"	9mm
7/16"	10mm
1/2"	11mm
9/16"	12mm
5/8"	16mm

6" Lengths available in these sizes:

3/16"	5mm
1/4"	6mm
5/16"	7mm
11/32"	8mm
3/8"	9mm
7/16"	10mm
1/2"	11mm
9/16"	12mm
5/8"	16mm

S23870



3" LENGTH INSULATED NUTDRIVERS

WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S2542010	3/16" X 3"
S2542030	1/4" X 3"
S2542050	5/16" X 3"
S2542060	11/32" X 3"
S2542070	3/8" X 3"
S2542080	7/16" X 3"
S2542090	1/2" X 3"
S2542100	9/16" X 3"
S2542110	5/8" X 3"
S2542710	5mm X 3"
S2542730	6mm X 3"
S2542750	7mm X 3"
S2542760	8mm X 3"
S2542770	9mm X 3"
S2542780	10mm X 3"
S2542790	11mm X 3"
S2542800	12mm X 3"

6" LENGTH INSULATED NUTDRIVERS

WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S2542010L	3/16" X 6"
S2542030L	1/4" X 6"
S2542050L	5/16" X 6"
S2542060L	11/32" X 6"
S2542070L	3/8" X 6"
S2542080L	7/16" X 6"
S2542090L	1/2" X 6"
S2542100L	9/16" X 6"
S2542110L	5/8" X 6"
S2542710L	5mm X 6"
S2542730L	6mm X 6"
S2542750L	7mm X 6"
S2542760L	8mm X 6"
S2542770L	9mm X 6"
S2542780L	10mm X 6"
S2542790L	11mm X 6"
S2542800L	12mm X 6"



S25921

NUTDRIVER 3" LENGTH SETS WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S25921	7 Tools + tool roll bag: 3/16"; 1/4"; 5/16"; 11/32"; 3/8"; 7/16"; 1/2"
S25922	9 Tools + tool roll bag: 3/16"; 1/4"; 5/16"; 11/32"; 3/8"; 7/16"; 1/2"; 9/16"; 5/8"
S25925	Metric set, 8 tools + tool roll bag: 5mm; 6mm; 7mm; 8mm; 9mm; 10mm; 11mm; 12mm

NUTDRIVER 6" LENGTH SETS WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S25922L	9 Tools + tool roll bag: 3/16"; 1/4"; 5/16"; 11/32"; 3/8"; 7/16"; 1/2"; 9/16"; 5/8"
S25925L	Metric set, 8 tools + tool roll bag: 5mm; 6mm; 7mm; 8mm; 9mm; 10mm; 11mm; 12mm

SCREWDRIVER SETS WITH CUSHION GRIP

CAT. NO.	DESCRIPTION
S23871	6 Tools + tool roll bag: #1 X 3"; #2 X 4"; 1/8" X 2"; 3/16" X 6"; 1/4" X 4"; 5/16" X 6"
S23869	8 Tools + tool roll bag: #1 X 3"; #2 X 4"; 1/8" X 2"; 3/16" X 6"; 3/16" X 10"; 1/4" X 4"; 5/16" X 6"; 3/8" X 8"
S23870	10 Tools + tool roll bag: #1 X 3"; #2 X 4"; #3 X 6"; 1/8" X 2"; 3/16" X 6"; 3/16" X 10"; 1/4" X 4"; 5/16" X 6"; 3/8" X 8"; 3/8" X 12"

WRENCH SETS

AVAILABLE IN BOTH SAE & METRIC SIZES

OPEN END WRENCH SETS

CAT. NO.	DESCRIPTION
S241713	13 pcs. 1/4" - 1" In a tool roll bag
S241714	14 pcs. 3/8" - 1-1/4" In a tool roll bag
S241814	13 pcs. 7mm - 19mm, In a tool roll bag
S241818	17 pcs. 7mm - 24mm, In a tool roll bag

OPEN END WRENCH SETS

CAT. NO.	DESCRIPTION
S241780	8 pcs. 1" - 1-1/2" In a bag
S241790	6 pcs. 1-5/8" - 2" In a bag

BOX END WRENCH SETS

CAT. NO.	DESCRIPTION
S241713-B	13 pcs. 1/4" - 1" In a roll bag
S241714-B	14 pcs. 3/8" - 1-1/4" In a tool roll bag
S241814-B	13 pcs. 7mm - 19mm, In a tool roll bag
S241818-B	17 pcs. 7mm - 24mm, In a tool roll bag

BOX END WRENCH SETS

CAT. NO.	DESCRIPTION
S241780-B	8 pcs. 1" - 1-1/2" In a bag
S241790-B	6 pcs. 1-5/8" - 2" In a bag



OPEN END WRENCHES

AVAILABLE IN BOTH SAE & METRIC SIZES

SAE sizes from 1/4" - 2"

Metric sizes from 6mm - 36mm

OPEN END WRENCH METRIC SIZES		OPEN END WRENCH SAE SIZES	
CAT. NO.	DESCRIPTION	CAT. NO.	DESCRIPTION
S248306	6mm	S2488408	1/4"
S248307	7mm	S2488410	5/16"
S248308	8mm	S2488412	3/8"
S248309	9mm	S2488414	7/16"
S248310	10mm	S2488416	1/2"
S248311	11mm	S2488418	9/16"
S248312	12mm	S2488420	5/8"
S248313	13mm	S2488422	11/16"
S248314	14mm	S2488424	3/4"
S248315	15mm	S24C26	13/16"
S248316	16mm	S24C28	7/8"
S248317	17mm	S24C30	15/16"
S248318	18mm	S24C32	1"
S248319	19mm	S24C34	1-1/16"
S248320	20mm	S24C36	1-1/8"
S248321	21mm	S24C40	1-1/4"
S248322	22mm	S24C42	1-5/16"
S248323	23mm	S24C44	1-3/8"
S248324	24mm	S24C46	1-7/16"
S248325	25mm	S24C48	1-1/2"
S248326	26mm	S24C52	1-5/8"
S248327	27mm	S24C54	1-11/16"
S248328	28mm	S24C56	1-3/4"
S248329	29mm	S24C58	1-13/16"
S248330	30mm	S24C60	1-7/8"
S248332	32mm	S24C64	2"
S248336	36mm		



WRENCHES

AVAILABLE IN BOTH SAE & METRIC SIZES

RATCHETING BOX END WRENCH

12 POINT SAE SIZES


CAT. NO.	DESCRIPTION
S249008	1/4"
S249010	5/16"
S249011	11/32"
S249012	3/8"
S249014	7/16"
S249016	1/2"
S249018	9/16"
S249020	5/8"
S249022	11/16"
S249024	3/4"
S249026	13/16"
S249028	7/8"
S249030	15/16"
S249032	1"
S249034	1-1/16"
S249036	1-1/8"
S249038	1-1/4"
S24RB-42	1-5/16"
S24RB-44	1-3/8"
S24RB-46	1-7/16"
S24RB-48	1-1/2"
S24RB-50	1-9/16"
S24RB-52	1-5/8"
S24RB-54	1-11/16"
S24RB-56	1-3/4"
S24RB-58	1-13/16"
S24RB-60	1-7/8"
S24RB-64	2"
S24RB-68	2-1/8"

RATCHETING BOX END WRENCH

12 POINT METRIC SIZES

CAT. NO.	DESCRIPTION
S249115	15mm 12 Point
S249116	16mm 12 Point
S249117	17mm 12 Point
S249118	18mm 12 Point
S249119	19mm 12 Point
S249120	20mm 12 Point
S249121	21mm 12 Point
S249122	22mm 12 Point
S249123	23mm 12 Point
S249124	24mm 12 Point
S249125	25mm 12 Point
S249126	26mm 12 Point
S249127	27mm 12 Point
S249129	29mm 12 Point
S249130	30mm 12 Point
S249132	32mm 12 Point
S249134	34mm 12 Point
S249136	36mm 12 Point

RATCHETING BOX END WRENCHES

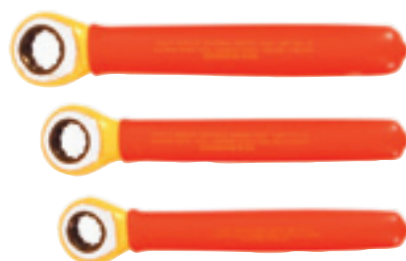

RATCHETING BOX END WRENCH

6 POINT METRIC SIZES

CAT. NO.	DESCRIPTION
S249106	6mm 6 Point
S249107	7mm 6 Point
S249108	8mm 6 Point
S249109	9mm 6 Point
S249110	10mm 6 Point
S249111	11mm 6 Point
S249112	12mm 6 Point
S249113	13mm 6 Point
S249114	14mm 6 Point

BOX END WRENCH

SAE SIZES - 12 POINT

CAT. NO.	DESCRIPTION
S2488408-B	1/4"
S2488410-B	5/16"
S2488412-B	3/8"
S2488414-B	7/16"
S2488416-B	1/2"
S2488418-B	9/16"
S2488420-B	5/8"
S2488422-B	11/16"
S2488424-B	3/4"
S24C26-B	13/16"
S24C28-B	7/8"
S24C30-B	15/16"
S24C32-B	1"
S24C34-B	1-1/16"
S24C36-B	1-1/8"
S24C40-B	1-1/4"
S24C42-B	1-5/16"
S24C44-B	1-3/8"
S24C46-B	1-7/16"
S24C48-B	1-1/2"
S24C52-B	1-5/8"
S24C54-B	1-11/16"
S24C56-B	1-3/4"
S24C58-B	1-13/16"
S24C60-B	1-7/8"
S24C64-B	2"

BOX END WRENCHES



BOX END WRENCH

METRIC SIZES - 12 POINT

CAT. NO.	DESCRIPTION
S248306-B	6mm
S248307-B	7mm
S248308-B	8mm
S248309-B	9mm
S248310-B	10mm
S248311-B	11mm
S248312-B	12mm
S248313-B	13mm
S248314-B	14mm
S248315-B	15mm
S248316-B	16mm
S248317-B	17mm
S248318-B	18mm
S248319-B	19mm
S248320-B	20mm
S248321-B	21mm
S248322-B	22mm
S248323-B	23mm
S248324-B	24mm
S248325-B	25mm
S248326-B	26mm
S248327-B	27mm
S248328-B	28mm
S248329-B	29mm
S248330-B	30mm
S248332-B	32mm
S248336-B	36mm

WRENCHES


AVAILABLE IN BOTH SAE & METRIC SIZES

RATCHETING BOX END WRENCH SET

CAT. NO.	DESCRIPTION
S24RB-13	13 pcs. 1/4" - 1", 12 Point In a tool roll bag
S24RBM-15	15 pcs. 7mm - 21mm, In a tool roll bag

RATCHETING BOX END WRENCH SET

CAT. NO.	DESCRIPTION
S24RB-12	15 pcs. 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-7/16", 1-1/2", 1-9/16", 1-5/8", 1-11/16", 1-3/4", 1-13/16", 1-7/8", 2", 2-1/8" 12 point In a tool bag
S24RBM-10	10 pcs. 22, 23, 24, 25, 26, 27, 29, 30, 32, 36mm In a tool bag

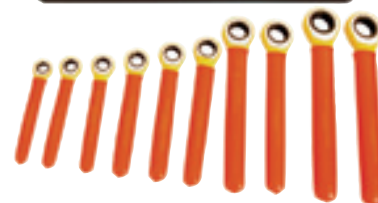

HEX WRENCH "T" HANDLE SET

CAT. NO.	DESCRIPTION
S262344	11 pcs. 5/64 - 3/8" 6" Long In plastic tool roll bag
S2613P	13 pcs. 5/64 - 1/2" 6" Long In a tool roll bag
S2610M	10 pcs. 2mm-12mm 6" Long In a tool roll bag



HEX WRENCH TYPE "L" SET


CAT. NO.	DESCRIPTION
S2610214	14 pcs. 1/16" - 1/2" Long arm In a tool roll bag
S2610217	16 pcs. 1/16" - 5/8" Long arm In a tool roll bag
S2610610	10 pcs. 1.5mm - 12.0mm Long arm In a tool roll bag
S2610614	12 pcs. 1.5mm - 17.0mm Long arm In a tool roll bag

6" LONG "T" HANDLE HEX WRENCH

AVAILABLE IN BOTH SAE & METRIC SIZES

SAE sizes from 5/64" - 9/16"

Metric sizes from 2mm - 12mm



6" LONG "T" HANDLE HEX WRENCH

SAE SIZES

CAT. NO.	DESCRIPTION
S2631605	5/64"
S2631606	3/32"
S2631607	7/64"
S2631608	1/8"
S2631609	9/64"
S2631610	5/32"
S2631612	3/16"
S2631614	7/32"
S2631616	1/4"
S2631620	5/16"
S2631624	3/8"
S2651628	7/16"
S2651632	1/2"
S2651634	9/16"

6" LONG "T" HANDLE HEX WRENCH

METRIC SIZES

CAT. NO.	DESCRIPTION
S2634620	2mm
S2634625	2.5mm
S2634630	3mm
S2634640	4mm
S2634650	5mm
S2634660	6mm
S2634680	8mm
S2634690	10mm
S2654691	11mm
S2654692	12mm

WRENCHES

AVAILABLE IN BOTH SAE & METRIC SIZES




LONG ARM HEX WRENCH

AVAILABLE IN BOTH SAE & METRIC SIZES

SAE sizes from 1/16" - 2"

Metric sizes from 1.5mm - 36mm



LONG ARM HEX WRENCH

SAE SIZES

CAT. NO.	DESCRIPTION
S262223	1/16"
S262224	5/64"
S262225	3/32"
S262226	7/64"
S262227	1/8"
S262228	9/64"
S262229	5/32"
S262231	3/16"
S262233	7/32"
S262235	1/4"
S262239	5/16"
S262243	3/8"
S262247	7/16"
S262251	1/2"
S262255	9/16"
S262259	5/8"
S262267	3/4"
S262275	7/8"
S262283	1"
S262291	1-1/8"

SIZES UP TO 2" AVAILABLE UPON REQUEST.

LONG ARM HEX WRENCH

METRIC SIZES

CAT. NO.	DESCRIPTION
S2615603	1.5mm
S2615604	2mm
S2615605	2.5mm
S2615606	3mm
S2615607	3.5mm
S2615608	4mm
S2615609	4.5mm
S2615610	5mm
S2615611	5.5mm
S2615612	6mm
S2615614	7mm
S2615616	8mm
S2615618	9mm
S2615620	10mm
S2615622	11mm
S2615624	12mm
S2615628	14mm
S2615634	17mm
S2615638	19mm
S2615644	22mm
S2615648	24mm
S2615651	27mm
S2615656	32mm
S2615660	36mm



ADJUSTABLE WRENCH

AVAILABLE IN SIZES FROM 4" - 24"

CAT. NO.	DESCRIPTION
S24804	4"; 1/2" Jaw opening
S24806	6"; 15/16" Jaw opening
S24808	8"; 1-1/8" Jaw opening
S24810	10"; 1-5/16" Jaw opening
S24812	12"; 1-1/2" Jaw opening
S24815	15"; 1-11/16" Jaw opening
S24818	18"; 2-1/16" Jaw opening
S24824	24"; 2-7/16" Jaw opening



ADJUSTABLE BUG WRENCH

CAT. NO.	DESCRIPTION
S2470221	8" Bug wrench 1/4" - 3/4" capacity
S2470222	10" Bug wrench 3/8" - 1" capacity

TORQUE WRENCHES

TORQUE WRENCH

CAT. NO.	DESCRIPTION
S22TCI150RA	1/4" Dr, 9-1/2" long, 30-200 in/lb (4nm-23nm)
S22TCI150RA38	3/8" Dr, 10" long, 30-200 in/lb (4nm-23nm)
S22TCI250RA	3/8" Dr, 12-1/2" long, 50-250 in/lb (6nm-29nm)
S22TCI750R	3/8" Dr, 15" long, 100-1000 in/lb (14nm-116nm)
S22TCI75FRN	3/8" Dr, 14-1/4" long, 5-75 ft/lb (5nm-105nm)
S22TCI150FRN	1/2" Dr, 18-1/2" long, 10-150 ft/lb (20nm-210nm)
S22TCI250FRN	1/2" Dr, 21-1/2" long, 25-250 ft/lb (43nm-348nm)


TORQUE SCREWDRIVER

CAT. NO.	DESCRIPTION
S22TS35	1/4" Dr, 6-3/8" long, 1-36 in/lb
S22TS100	1/4" Dr, 6-3/8" long, 20-100 in/oz

A WIDE VARIETY OF TORQUE WRENCHES ARE AVAILABLE UPON REQUEST. RE-CALIBRATION SERVICE AVAILABLE, CONTACT CUSTOMER SERVICE FOR MORE INFORMATION.



PLIERS

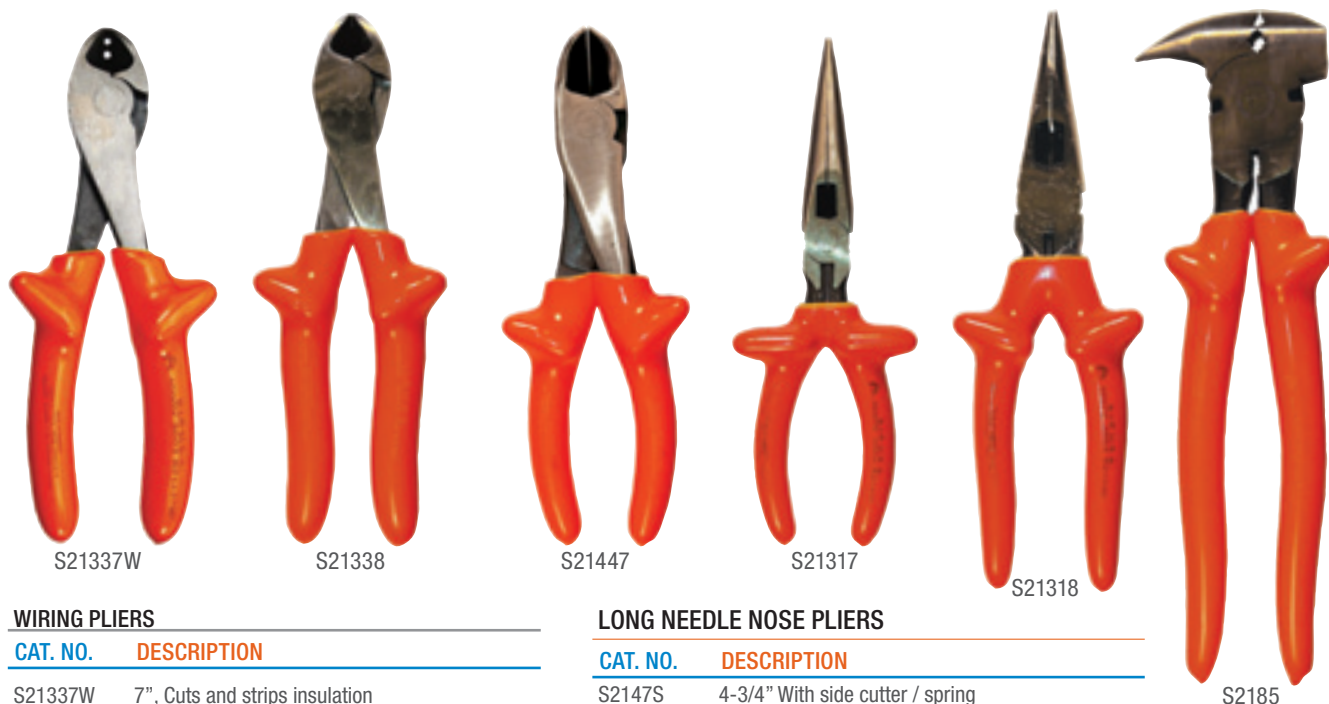

WIRING PLIERS

CAT. NO.	DESCRIPTION
S21337W	7", Cuts and strips insulation

CUTTING PLIERS, LAP JOINT

CAT. NO.	DESCRIPTION
S21337	7" Lap joint
S21338	8" Lap joint

CURVED CUTTING PLIERS

CAT. NO.	DESCRIPTION
S21447	Diagonal curve 7-3/4" box joint

LONG NEEDLE NOSE PLIERS

CAT. NO.	DESCRIPTION
S2147S	4-3/4" With side cutter / spring
S2150S	5-3/4" With side cutter / spring
S21326	6" With side cutter
S21317	7" With side cutter
S21318	8" With side cutter

FENCE TOOL

CAT. NO.	DESCRIPTION
S2185	10-1/2" Overall length hammer on one jaw, staple starter and puller on the other side


PLIERS



S21437



S21308

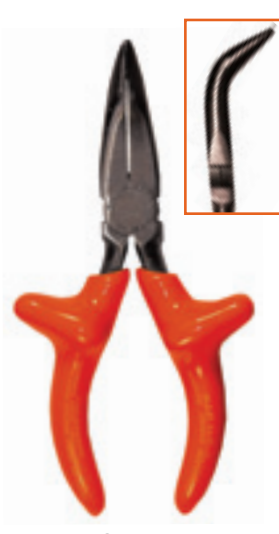

S21386



S21358



S21738



S21728



S21718



S21748



S21148-10



S21422



S215410

CUTTING PLIERS , BOX JOINT

CAT. NO.	DESCRIPTION
S21435	5" Box joint
S21435S	5" Box joint w/ spring
S21436	6" Box joint
S21436S	6" Box joint w/ spring
S21437	7" Box joint

BENT NEEDLE NOSE PLIERS

CAT. NO.	DESCRIPTION
S2149	4-1/2"
S21386	5-1/2" Without side cutter

END CUTTING PLIERS

CAT. NO.	DESCRIPTION
S21356	6"
S21357	7"
S21358	8"

LONG REACH PLIERS

CAT. NO.	DESCRIPTION
S21728	7-1/2" Diagonal cutter
S21738	8"

FLAT NOSE PLIERS

CAT. NO.	DESCRIPTION
S2144	4-3/4"
S21D305-6	6"
S21718	Long reach 8"

LONG REACH END CUTTER

CAT. NO.	DESCRIPTION
S21748	8"

SHORT NOSE PLIERS

CAT. NO.	DESCRIPTION
S21308	8" Shearing

END CUTTING NIPPERS

CAT. NO.	DESCRIPTION
S21148-10	10"
S21148-14	14"

V GROOVE PLIERS

CAT. NO.	DESCRIPTION
S21422	9-1/2", 1-1/2" Capacity
S21442	12", 2-1/4" Capacity

HEAVY DUTY SLIP JOINT PLIERS

CAT. NO.	DESCRIPTION
S21546	6" With cutting shear
S21537	7" With fine side cutter
S21548	8" With cutting shear
S215410	Pliers hose clamp slip joint 10" with cutting shear


WATERPUMP PLIERS

CAT. NO.	DESCRIPTION
S21GL6	6", 1-1/16" Capacity
S21gl10	9-1/2", 1-1/4" Capacity
S21gl12	12", 2-1/4" Capacity

PLIERS W/ SIDE CUTTERS

CAT. NO.	DESCRIPTION
S2112098	8-1/2" With sleeve-connector crimping die

ROUNDED NOSE PLIERS

CAT. NO.	DESCRIPTION
S21346	6"
S21347	7"
S21348	8-1/2"
S21369	9" High leverage
S213248	8-1/2" With cutter & crimper

SLIP JOINT PLIERS

CAT. NO.	DESCRIPTION
S21516	6", Thin nose with cutting shear

LINEMAN PLIERS

CAT. NO.	DESCRIPTION
S21350-S	9" With coiled spring

TONGUE & GROOVE PLIERS

CAT. NO.	DESCRIPTION
S21415	10", 2" Capacity smooth jaws
S21424	4-1/2", 1/2" Capacity
S21426	6-1/2", 7/8" Capacity
S21420	9-1/2", 1-1/2" Capacity
S21430	10", 2" Capacity
S21440	12", 2-1/4" Capacity
S21460	16", 4-1/4" Capacity
S21480	20", 5-1/2" Capacity


WIRE STRIPPER-CUTTER-CRIMPER

CAT. NO.	DESCRIPTION
S2111045	For cutting stripping and looping wire 10 - 18 ga
S21908	Wiring tool strips wire with no damage to conductor crimps both insulated and non-insulated wire

WIRE STRIPPER

CAT. NO.	DESCRIPTION
S2111062	Automatic wire stripper for 10-22ga; 1" depth. Blades are available for 8-12 awg; 16-26 awg and metric 4.0-0.5mm; and 1.0-.015mm
S21958	Wire stripper cutter 10-20ga for copper, strips insulation fast with no damage to wire, cuts copper wire cleanly

CRIMPING TOOL

CAT. NO.	DESCRIPTION
S21909	Crimping and cutting tool
S211005	Crimping tool and wire cutter for 10 to 22 awg

CUTTING PLIERS

CAT. NO.	DESCRIPTION
S21911	Cable cutter 9-1/2", cuts up to 4/0 aluminum and 'up to 2/0 soft copper. It is not designed for steel or ACSR

LONG REACH PLIERS & THIN PROFILE ELECTRONICS PLIERS



S21310



S21371



S21372



S2161190



S21510



S214044



S214046

LONG REACH DIAGONAL CUTTERS

CAT. NO.	DESCRIPTION
S21310	11" Long reach diagonal cutter with end cutter
S21311	11" Long reach offset diagonal cutters

LONG REACH SLIP JOINT PLIERS

CAT. NO.	DESCRIPTION
S21371	11" Long reach hd slip joint Pliers straight
S2137145	11" Long reach hd slip joint Pliers 45 degree

LONG REACH SLIP JOINT CABLE GRIPPERS

CAT. NO.	DESCRIPTION
S21372	11" Long hd slip joint cable grippers 3/8"
S21373	11" Long hd slip joint cable grippers 3/4"

LONG REACH NEEDLE NOSE

CAT. NO.	DESCRIPTION
S21611	11" Long reach needle nose straight
S2161145	11" Long reach needle nose 45 degree bent nose
S2161190	11" Long reach needle nose 90 degree bent nose

LONG REACH CABLE GRIPPING PLIERS

CAT. NO.	DESCRIPTION
S21510	11" Long 5/16 od cable gripping Pliers
S21512	11" Long 1/2 od cable gripping Pliers
S21514	11" Long 3/4 od cable gripping Pliers

LONG REACH CHAIN NOSE

CAT. NO.	DESCRIPTION
S214044	6" Long Reach Chain Nose w/ cutter smooth jaws thin profile

LONG REACH OVAL HEAD

CAT. NO.	DESCRIPTION
S214046	5.5" Long reach oval head semi flush diagonal thin profile



S214050



S214052



S214048

LONG REACH FLAT NOSE

CAT. NO.	DESCRIPTION
S214050	6" Long reach flat nose non-serrated thin profile

LONG REACH THIN HEAD


CAT. NO.	DESCRIPTION
S214052	5.5" Long reach thin head semi flush diagonal thin profile

LONG REACH NEEDLE NOSE

CAT. NO.	DESCRIPTION
S214048	7" Long reach thin needle nose non-serrated thin profile
S214054	7" Long reach bent needle nose non-serrated thin profile

SNAP RING PLIERS

CAT. NO.	DESCRIPTION
S211202R	.038" Tip diameter
S21120245R	45 Deg .038" Tip diameter
S21120290R	90 Deg .038" Tip diameter
S213202R	.047" Tip diameter
S21320245R	45 Deg .047" Tip diameter
S21320290R	90 Deg .047" Tip diameter
S213402R	.070" Tip diameter
S21340245R	45 Deg .070" Tip diameter
S21340290R	90 Deg .070" Tip diameter
S215602R	.090" Tip diameter
S21560245R	45 Deg .090" Tip diameter
S21560290R	90 Deg .090" Tip diameter

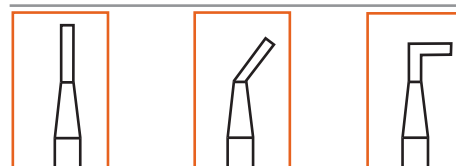TIP CONFIGURATIONS


0°

45°

90°

Use with either external or internal retaining rings.



S211202R

RATCHETING CABLE CUTTER

CAT. NO.	DESCRIPTION
S2163060	600mcm Alum 400mcm Copper
S215090FS	750mcm Alum 500mcm Copper

BOLT CUTTER

CAT. NO.	DESCRIPTION
S210090	18" Cuts 3/8" soft/medium material, 1/4" hard material
S210190	24" Cuts 7/16" soft/medium material, 5/16" hard material
S210290	30" Cuts 1/2" soft/medium material, 3/8" hard material
S210390	36" Cuts 9/16" soft/medium material, 7/16" hard material
S210590	42" Cuts 11/16" soft/medium material, 1/2" hard material

CABLE CUTTING PLIERS

CAT. NO.	DESCRIPTION
S2163035	17" For up to 1" coax cable cuts soft copper and aluminum cable up to 350 mcm, drop-forged steel, shear-type hook jaws grab and hold cable
S2163041	25" 1-3/8" Cutting capacity cuts 500 copper, 750 aluminum soft cable. Not designed for cutting steel or ACSR
S2163035-RING	For up to 1" coax cable cuts soft copper and aluminum cable up to 350 mcm; drop-forged steel; shear-type hook jaws grab and hold cable; with guidance ring
S2163030	9-1/2"
S2163055-RING	8" Cuts 24 awg cooper, aluminum multi-strand cable and wire; with guidance ring

CABLE SHEAR

CAT. NO.	DESCRIPTION
S2163041-RING	25", 1-3/8" Cutting capacity , cuts 500 copper, 750 aluminum, soft cable: 1-3/8" diameter; with guidance ring. Not designed for cutting steel or ACSR

HACKSAW

CAT. NO.	DESCRIPTION
S30602VSE	12" Hacksaw frame



S2163060



S210190



S2163035



S2163041-RING



S2163055-RING



S2163035-RING



S30602VSE

SOCKETS - 1/4" DRIVE



STANDARD OR DEEP SOCKET

1/4" DRIVE, 12 POINT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.

STANDARD SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2043906	3/16"
S2043907	7/32"
S2043908	1/4"
S2043909	9/32"
S2043910	5/16"
S2043911	11/32"
S2043912	3/8"
S2043914	7/16"
S2043916	1/2"
S2043918	9/16"

DEEP SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2044906	3/16"
S2044907	7/32"
S2044908	1/4"
S2044909	9/32"
S2044910	5/16"
S2044911	11/32"
S2044912	3/8"
S2044914	7/16"
S2044916	1/2"
S2044918	9/16"

STANDARD SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2040701	4mm 6 point
S2043702	5mm
S2043703	5.5mm
S2043704	6mm
S2043706	7mm
S2043707	8mm
S2043708	9mm
S2043709	10mm
S2043710	11mm
S2043711	12mm
S2043712	13mm
S2043713	14mm
S2040714	15mm 6 point

DEEP SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2041697	4mm 6 point
S2044702	5mm
S2044703	5.5mm
S2044704	6mm
S2044706	7mm
S2044707	8mm
S2044708	9mm
S2044709	10mm
S2044710	11mm
S2044711	12mm
S2044712	13mm
S2044713	14mm
S2041711	15mm 6 point

STANDARD OR DEEP SOCKET
3/8" DRIVE, 12 POINT SOCKET
AVAILABLE IN BOTH SAE & METRIC SIZES.
STANDARD SOCKET
SAE SIZES

CAT. NO.	DESCRIPTION
S2045208	1/4"
S2045210	5/16"
S2045212	3/8"
S2045214	7/16"
S2045216	1/2"
S2045218	9/16"
S2045120	5/8"
S2045122	11/16"
S2045124	3/4"
S2045126	13/16"
S2045128	7/8"
S2045130	15/16"
S2045132	1"

STANDARD SOCKET
METRIC SIZES

CAT. NO.	DESCRIPTION
S20306	6mm 6 point
S202307	7mm
S202308	8mm
S202309	9mm
S202310	10mm
S202311	11mm
S202312	12mm
S202313	13mm
S202314	14mm
S202315	15mm
S202316	16mm
S202317	17mm
S202318	18mm
S202319	19mm
S202320	20mm
S202321	21mm
S202322	22mm
S202323	23mm
S202324	24mm

DEEP SOCKET
SAE SIZES

CAT. NO.	DESCRIPTION
S2042408	1/4"
S2042410	5/16"
S2042412	3/8"
S2042414	7/16"
S2042416	1/2"
S2042418	9/16"
S2042420	5/8"
S2042422	11/16"
S2042424	3/4"
S2042426	13/16"
S2042428	7/8"
S2042430	15/16"
S2042432	1"

DEEP SOCKET
METRIC SIZES

CAT. NO.	DESCRIPTION
S208406	6mm 6 point
S208407	7mm 6 point
S208408	8mm 6 point
S208429	9mm
S208430	10mm
S208431	11mm
S208432	12mm
S208433	13mm
S208434	14mm
S208435	15mm
S208436	16mm
S208437	17mm
S208438	18mm
S208439	19mm
S208420	20mm 6 point
S208421	21mm 6 point
S208422	22mm 6 point
S208423	23mm 6 point
S208424	24mm 6 point
S208425	25mm 6 point
S208426	26mm 6 point




SOCKETS - 1/2" DRIVE

STANDARD OR DEEP SOCKET

1/2" DRIVE, 12 POINT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.



STANDARD SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2040212	3/8"
S2040214	7/16"
S2040216	1/2"
S2040218	9/16"
S2040120	5/8"
S2040122	11/16"
S2040124	3/4"
S2040126	13/16"
S2040128	7/8"
S2040130	15/16"
S2040132	1"
S2040134	1-1/16"
S2040136	1-1/8"
S2040138	1-3/16"
S2040140	1-1/4"
S2040142	1-5/16"
S2040144	1-3/8"
S2040146	1-7/16"
S2040148	1-1/2"

STANDARD SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2040309	9mm
S2040310	10mm
S2040311	11mm
S2040312	12mm
S2040313	13mm
S2040314	14mm
S2040315	15mm
S2040316	16mm
S2040317	17mm
S2040318	18mm
S2040319	19mm
S2040320	20mm
S2040321	21mm
S2040322	22mm
S2040323	23mm
S2040324	24mm
S2040325	25mm
S2040326	26mm
S2040327	27mm
S2040328	28mm
S2040329	29mm
S2040330	30mm
S2040331	31mm
S2040332	32mm
S2040336	36mm

DEEP SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2040812	3/8"
S2040814	7/16"
S2040816	1/2"
S2040818	9/16"
S2040820	5/8"
S2040822	11/16"
S2040824	3/4"
S2040826	13/16"
S2040828	7/8"
S2040830	15/16"
S2040832	1"
S2040834	1-1/16"
S2040836	1-1/8"
S2040838	1-3/16"
S2040840	1-1/4"
S2040842	1-5/16"
S2040844	1-3/8"
S2040846	1-7/16"
S2040848	1-1/2"

DEEP SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2048010	10mm
S2048011	11mm
S2048012	12mm
S2048013	13mm
S2048014	14mm
S2048015	15mm
S2048016	16mm
S2048017	17mm
S2048018	18mm
S2048019	19mm
S2048020	20mm
S2048021	21mm
S2048022	22mm
S2048023	23mm
S2048024	24mm
S2048025	25mm
S2048026	26mm
S2048027	27mm
S2048028	28mm
S2048030	30mm
S2048032	32mm

STANDARD SOCKET

3/4" DRIVE, 12 POINT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.

STANDARD SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2047124	3/4"
S2047126	13/16"
S2047128	7/8"
S2047130	15/16"
S2047132	1"
S2047134	1-1/16"
S2047136	1-1/8"
S2047138	1-3/16"
S2047140	1-1/4"
S2047142	1-5/16"
S2047144	1-3/8"
S2047146	1-7/16"
S2047148	1-1/2"
S2047150	1-9/16"
S2047152	1-5/8"
S2047154	1-11/16"
S2047156	1-3/4"
S2047158	1-13/16"
S2047160	1-7/8"
S2047164	2"
S2047166	2-1/16"
S2047168	2-1/8"
S2047171	2-3/16"
S2047172	2-1/4"
S2047176	2-3/8"

STANDARD SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2048122	22mm
S2048123	23mm
S2048124	24mm
S2048126	26mm
S2048127	27mm
S2048128	28mm
S2048129	29mm
S2048130	30mm
S2048132	32mm
S2048133	33mm
S2048135	35mm
S2048136	36mm
S2048138	38mm
S2048140	40mm
S2048141	41mm
S2048142	42mm
S2048146	46mm
S2048150	50mm
S2048154	54mm
S2048155	55mm



RATCHET & SOCKET ACCESSORIES



FLEX HEAD HANDLES

CAT. NO.	DESCRIPTION
S2040952	1/4" Drive flex head handle 5.4"
S2045152	3/8" Drive flex head handle 10"
S2041650	1/2" Drive flex head handle 9"
S2041652	1/2" Drive flex head handle 16"
S2041654	1/2" Drive flex head handle 24"
S2047155	3/4" Drive flex head handle 18"

RATCHETS

CAT. NO.	DESCRIPTION
S2040970NB	1/4" Drive ratchet 4.5" no boot
S2040970	1/4" Drive ratchet 4.5"
S2040971	1/4" Drive ratchet 6.5"
S2045170NB	3/8" Drive ratchet 7.6" no boot
S2045170	3/8" Drive ratchet 7.6"
S2045179	3/8" Drive ratchet 10.3"
S2045174	3/8" Drive ratchet stubby 4.8"
S2042470NB	1/2" Drive ratchet 10.3" no boot
S2042470	1/2" Drive ratchet 10.3"
S2040170	1/2" Drive ratchet 15"
S2047170	3/4" Drive ratchet 18"

"T" SOCKET DRIVER

CAT. NO.	DESCRIPTION
S2045850	6" "T"-socket driver, 3/8" drive
S2045851	12" "T"-socket driver, 3/8" drive
S2041950	6" "T"-socket driver, 1/2" drive
S2041951	12" "T"-socket driver, 1/2" drive

ADAPTERS

CAT. NO.	DESCRIPTION
S20384	Adapter 3/8" F - 1/4"M
S20385	Adapter 1/4" F - 3/8"M
S20451	Adapter 3/8" F - 1/2"M
S20401	Adapter 1/2" F - 3/8"M
S20407	Adapter 1/2" F - 3/4"M
S20409	Adapter 3/4" F - 1/2"M

EXTENSIONS

AVAILABLE IN 1/4", 3/8", 1/2" AND 3/4" DRIVES


EXTENSIONS ARE AVAILABLE IN FLARE NOSE STYLE FOR USE ON NON-BOOTED SOCKETS.

FIBERGLASS EXTENSIONS

AVAILABLE IN 3/8" AND 1/2" DRIVES

CAT. NO.	DESCRIPTION
S2045161FB	extension 6" 3/8" drive
S2045162FB	extension 12" 3/8" drive
S2040164FB	extension 6" 1/2" drive
S2040165FB	extension 12" 1/2" drive

FIBERGLASS EXTENSIONS ARE TESTED AT 80 FT./LBS., DO NOT EXCEED 60 FT./LBS.

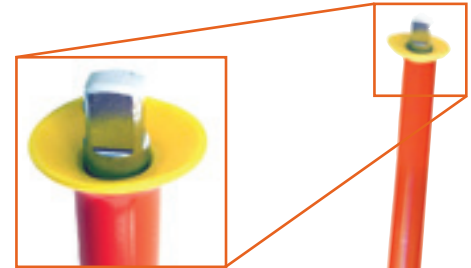

EXTENSIONS

CAT. NO.	DESCRIPTION
S2040961	1/4" drive extension 2"
S2040963	1/4" drive extension 3"
S2040962	1/4" drive extension 6"
S2040968	1/4" drive extension 8"
S2040969	1/4" drive extension 10"
S2040964	1/4" drive extension 14"
S2045159	3/8" drive extension 1.5"
S2045160	3/8" drive extension 3"
S2045161	3/8" drive extension 6"
S2045158	3/8" drive extension 9"
S2045162	3/8" drive extension 12"
S2045163	3/8" drive extension 18"
S2045164	3/8" drive extension 24"
S2045149	3/8" drive extension 35"
S2040160	1/2" drive extension 2"
S2040161	1/2" drive extension 5"
S2040162	1/2" drive extension 10"
S2040163	1/2" drive extension 20"
S2047159	3/4" drive extension 3"
S2047163	3/4" drive extension 5"
S2047161	3/4" drive extension 8"
S2047162	3/4" drive extension 16"

EXTENSIONS WITH FLARE END


CAT. NO.	DESCRIPTION
S2040961FN	1/4" drive extension 2"
S2040963FN	1/4" drive extension 3"
S2040962FN	1/4" drive extension 6"
S2040968FN	1/4" drive extension 8"
S2040969FN	1/4" drive extension 10"
S2040964FN	1/4" drive extension 14"
S2045159FN	3/8" drive extension 1.5"
S2045160FN	3/8" drive extension 3"
S2045161FN	3/8" drive extension 6"
S2045158FN	3/8" drive extension 9"
S2045162FN	3/8" drive extension 12"
S2045163FN	3/8" drive extension 18"
S2045164FN	3/8" drive extension 24"
S2045149FN	3/8" drive extension 35"
S2040160FN	1/2" drive extension 2"
S2040161FN	1/2" drive extension 5"
S2040162FN	1/2" drive extension 10"
S2040163FN	1/2" drive extension 20"
S2047159FN	3/4" drive extension 3"
S2047163FN	3/4" drive extension 5"
S2047161FN	3/4" drive extension 8"
S2047162FN	3/4" drive extension 16"



RATCHET & SOCKET ACCESSORIES



Phillips Screwdriver Bit Socket



Slotted Screwdriver Bit Socket



1/4" DRIVE SCREWDRIVER BIT SOCKETS

SLOTTED AND PHILLIPS

Available in these size ranges:

Slotted - 3/16" - 5/16"

Phillips - #0 - #3

CAT. NO.	DESCRIPTION
S2044470	Slotted 1F - 2R
S2044471	Slotted 2F - 3R
S2044472	Slotted 4F - 5R
S2044473	Slotted 6F - 8R
S2044480	Phillips #0
S2044481	Phillips #1
S2044482	Phillips #2
S2044483	Phillips #3
S2044570	6" long slotted 1F-2R
S2044571	6" long slotted 2F-3R
S2044572	6" long slotted 4F-5R
S2044573	6" long slotted 6F-8R
S2044581	6" long phillips #1
S2044582	6" long phillips #2
S2044883	6" long phillips #3

3/8" DRIVE SCREWDRIVER BIT SOCKETS

SLOTTED AND PHILLIPS

Available in these size ranges:

Slotted - 3F-4R - 12F-16R

Phillips - #1 - #4

CAT. NO.	DESCRIPTION
S2045471	Slotted 3F - 4R
S2045472	Slotted 4F - 5R
S2045473	Slotted 5F - 6R
S2045474	Slotted 8F - 12R
S2045475	Slotted 12F - 16R
S2045481	Phillips #1
S2045482	Phillips #2
S2045483	Phillips #3
S2045484	Phillips #4
S2045671	6" long slotted 3F - 4R
S2045672	6" long slotted 4F - 5R
S2045673	6" long slotted 5F - 6R
S2045674	6" long slotted 8F - 12R
S2045675	6" long slotted 12F - 16R
S2045681	6" Long phillips #1
S2045682	6" Long phillips #2
S2045683	6" Long phillips #3
S2045684	6" Long phillips #4

RATCHET & SOCKET ACCESSORIES

1/4" DRIVE TORX BIT & TAMPER-PROOF TORX SOCKET

Available in these size ranges:


T8 - T27 4" long

1/4" TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2042908	T8
S2042910	T10
S2042915	T15
S2042920	T20
S2042925	T25
S2042927	T27
S2042930	T30
S2042958	T8 4" long
S2042960	T10 4" long
S2042965	T15 4" long
S2042970	T20 4" long
S2042975	T25 4" long
S2042977	T27 4" long

1/4" TAMPER-PROOF TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2042507	T7
S2042508	T8
S2042510	T10
S2042515	T15
S2042520	T20
S2042525	T25
S2042527	T27
S2042530	T30



Torx Screwdriver Bit Socket

3/8" DRIVE TORX BIT & TAMPER-PROOF TORX SOCKET

Available in these size ranges:

T40 - T50 extra long

3/8" TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2045540	T40
S2045545	T45
S2045547	T47
S2045550	T50
S2045555	T55
S2042580	T30 4" long
S2042590	T40 4" long
S2042595	T45 4" long
S2042600	T50 4" long
S2042640	T40 6" long
S2042645	T45 6" long
S2042650	T50 6" long
S2042655	t55 6" long

3/8" TAMPER-PROOF TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2045440	T40
S2045445	T45
S2045450	T50
S2045455	T55
S2044205	5/64
S2044206	3/32
S2044207	7/64
S2044208	1/8
S2044209	9/64
S2044210	5/32
S2044212	3/16
S2044214	7/32
S2044216	1/4



Tamper-Proof Torx Screwdriver Bit Socket



1/2" DRIVE TORX BIT SOCKET

Available in this size:

T60 - T70

1/2" TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2045560	T60
S2045565	T70

TAMPER-PROOF TORX BIT SOCKET

Available in this size:

T60 - T70

1/2" TORX BIT SOCKET

CAT. NO.	DESCRIPTION
S2045570	T60
S2045580	T70

RATCHET & SOCKET ACCESSORIES

1/4" DRIVE HEX BIT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.

Available in these size ranges:

1/16" - 1/4"

2mm - 6mm

1/4" HEX BIT SOCKET


SAE SIZES

CAT. NO.	DESCRIPTION
S2044304	1/16"
S2044305	5/64"
S2044306	3/32"
S2044307	7/64"
S2044308	1/8"
S2044309	9/64"
S2044310	5/32"
S2044312	3/16"
S2044314	7/32"
S2044316	1/4"

1/4" HEX BIT SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2044324	2mm
S2044325	2.5mm
S2044326	3mm
S2044327	4mm
S2044328	5mm
S2044330	6mm



Hex Screwdriver
Bit Socket

1/2" DRIVE HEX BIT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.

Available in these size ranges:

5/16" - 3/4"

12mm - 19mm

1/2" HEX BIT SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2041213	5/16"
S2041214	3/8"
S2041215	7/16"
S2041216	1/2"
S2041218	9/16"
S2041220	5/8"
S2041221	11/16"
S2041222	3/4"
S2041613	5/16" 6" long
S2041614	3/8" 6" long
S2041615	7/16" 6" long
S2041266	1/2" 6" long
S2041268	9/16" 6" long
S2041270	5/8" 6" long
S2041621	11/16" 6" long
S2041622	3/4" 6" long

1/2" HEX BIT SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2041412	12mm
S2041413	13mm
S2041414	14mm
S2041416	16mm
S2041417	17mm
S2041419	19mm
S2041462	12mm 6" long
S2041463	13mm 6" long
S2041464	14mm 6" long
S2041466	16mm 6" long
S2041467	17mm 6" long
S2041469	19mm 6" long

3/8" DRIVE HEX BIT SOCKET

AVAILABLE IN BOTH SAE & METRIC SIZES.

Available in these size ranges:

1/16" - 1/2"

2mm - 12mm

3/8" HEX BIT SOCKET

SAE SIZES

CAT. NO.	DESCRIPTION
S2041201	1/16"
S2041202	5/64"
S2041203	3/32"
S2041204	7/64"
S2041205	1/8"
S2041206	9/64"
S2041207	5/32"
S2041208	3/16"
S2041209	7/32"
S2041210	1/4"
S2041310	9/32"
S2041211	5/16"
S2041212	3/8"
S2041225	7/16"
S2041226	1/2"
S2045904	1/8" 6" long
S2045905	5/32" 6" long
S2045906	3/16" 6" long
S2045907	7/32" 6" long
S2045908	1/4" 6" long
S2045909	9/32" 6" long
S2045910	5/16" 6" long
S2045912	3/8" 6" long
S2045913	7/16" 6" long
S2045914	1/2" 6" long

3/8" HEX BIT SOCKET

METRIC SIZES

CAT. NO.	DESCRIPTION
S2041400	2mm
S2041401	2.5mm
S2041402	3mm
S2041403	4mm
S2041404	5mm
S2041405	6mm
S2041406	7mm
S2041407	8mm
S2041408	9mm
S2041409	10mm
S2041410	11mm
S2041411	12mm
S2041502	3mm 6" long
S2041503	4mm 6" long
S2041504	5mm 6" long
S2041505	6mm 6" long
S2041506	7mm 6" long
S2041507	8mm 6" long
S2041508	9mm 6" long
S2041509	10mm 6" long
S2041510	11mm 6" long
S2041511	12mm 6" long



RATCHET & SOCKET SETS



S102

BATTERY TORQUE SET

CAT. NO.	DESCRIPTION
S102	4 pcs. Includes: 3/8" dr torque ratchet 10" long 30-150 in/lb, 7" fiberglass extension, 1/2" box wrench 1/2" regular socket 6pt In a plastic box



S104

SOCKET SET 3/8" DRIVER DEEP SET

CAT. NO.	DESCRIPTION
S103	11 pcs. Includes: 3/8" reversible ratchet, 3" and 6" extension Deep sockets 12pt: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4 and 13/16" In a fitted plastic case
S103-ST	11 pcs. Regular socket, 3/8 Dr.
S104	16 pcs. Includes: ratchet, 3" and 6" extension Deep sockets 12pt: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16 and 1" In a fitted plastic case
S105	Metric 14 pcs. includes: ratchet, 3" and 6" extension Deep sockets 12pt: 9mm to 19mm In a fitted plastic case
S106	Metric 24 pcs. includes: ratchet, 3" and 6" extension Deep sockets 6 and 12pt: 6mm to 26mm In a fitted plastic case
S601	13 pcs. Deep socket kit, 1/4 to 13/16; 3/8 Dr, In a custom box



S602

ALLEN SOCKET SET

CAT. NO.	DESCRIPTION
S602	14 Tools + roll, 3/8 dr 1/8" to 1/2" Includes: 3/8" reversible ratchet, 3" and 6" extension
S602M	Metric 13pcs 3mm-12mm hex bit 3/8" Dr.
S603	Allen socket kit includes: 15 tools + roll 3/8" Dr., 1/16"-3/8" 3/8" reversible ratchet, 3" and 6" extension In a tool roll



Tool Roll
Included

CLOSE QUARTERS SOCKET SET

THESE SETS ARE DESIGNED FOR USE IN TIGHT WORK SPACES

CAT. NO.	DESCRIPTION
S204946	1/4" Dr 13 pcs. includes: 1/4" ratchet, 3" & 6" flared extensions, regular sockets 12pt: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 and 9/16" Packaged in a plastic tool box.
S204653	3/8" Dr 16 pcs. includes: 3/8" ratchet, 3" & 6" flared extensions, regular sockets 12pt: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16 and 1" Packaged in a plastic case tool box.
S204121	1/2" Dr 21 pcs. includes: 1/2" ratchet, 5" flared extension, regular sockets 12pt: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16 and 1-1/2" Packaged in a plastic case.
S204122	3/4" Dr 27 pcs. includes: 3/4" ratchet, 5" flared extension, regular sockets 12pt: 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16, 1-5/8, 1-11/16, 1-3/4, 1-13/16, 1-7/8, 2, 2-1/16, 2-1/8, 2-3/16, 2-1/4 and 2-3/8" Packaged in a plastic case tool box.
S201340	1/4" Dr 13 pcs. includes: 1/4" ratchet, 3" & 6" flared extensions, regular sockets 12pt: 5mm to 14mm Packaged in a plastic case tool box.
S2089023	3/8" Dr 16 pcs. includes: 3/8" ratchet, 3" & 6" flared extensions, regular sockets 12pt: 7mm to 19mm Packaged in a plastic case tool box.
S201919	1/2" Dr 21 pcs. includes: 1/2" ratchet, 5" flared extension, regular sockets 12pt: 10mm to 28mm Packaged in a plastic case tool box.
S2094712E	3/4" Dr 22 pcs. includes: 3/4" ratchet, 5" flared extension, regular sockets 12pt: 22, 23, 24, 26, 27, 28, 29, 30, 32, 33, 35, 36, 38, 40, 41, 42, 46, 50, 54, 55mm Packaged in a plastic case tool box.



SPECIALIZED TOOLS



ADJUSTABLE MAGNETS

CAT. NO.	DESCRIPTION
S302375	Retrieving tool 18"

SCREWSTARTERS

CAT. NO.	DESCRIPTION
ULL-N-4	Slotted
ULL-PN-12	Phillips

POCKET MAGNETS

CAT. NO.	DESCRIPTION
S30385	6" long

ACCESSORIES

CAT. NO.	DESCRIPTION
S30FPF-1	Fuse puller
SIP-LIGHT	Waterproof flashlight
S90001	Penta wrench
KN985313	Dismantling knife

HOOK & PICK

CAT. NO.	DESCRIPTION
S3042996	4 pc. pick & hook set; Straight pick, 90 deg. hook, round hook & compound bend pick
S3042996-1	Straight pick
S3042996-2	90 deg
S3042996-3	Round
S3042996-4	Compound bend pick

BOXES AND ROLLS

CAT. NO.	DESCRIPTION
BOX-TK30	TK30 box with foam insert
BOX-TK60	TK60 box
BOX PB-16	16" tool box
ROLL-04	Roll 10 pockets for screwdrivers and nutdrivers
ROLL-05	Roll 9 pockets (4 for Pliers and 5 for screwdrivers) for TK9
ROLL-06	Roll 18 pockets for 1 hex wrenches
ROLL-08	Roll 13 pockets for "t" type hex wrench
ROLL-10	Roll 18 pockets for box and open wrenches
ROLL-11	Socket kit roll

DOUBLE END PICKUP MAGNET

CAT. NO.	DESCRIPTION
S27300-6	6" Double ended pickup magnet 5 lbs and 1-1/2 lbs pulling capacity
S27300-12	12" Double ended pickup magnet 5 lbs and 1-1/2 lbs pulling capacity
S27300-18	18" Double ended pickup magnet 5 lbs and 1-1/2 lbs pulling capacity

CAPABLE OF RETRIEVING STEEL PARTS AND FASTENERS FROM 1-1/2 LB TO 5 LB FROM HARD TO REACH PLACES. ALL SIP MAGNETS ARE MADE OF ALNICO MATERIAL.

DOUBLE END SCREW STARTERS


CAT. NO.	DESCRIPTION
S27400-6	6" Double end screw starter phillips at one end and slotted at the opposite end
S27400-12	12" Double end screw starter phillips at one end and slotted at the opposite end
S27400-18	18" Double end screw starter phillips at one end and slotted at the opposite end

SLOTTED SCREW STARTER WITH MAGNET

CAT. NO.	DESCRIPTION
S27500-6	6" Slotted screw starter with 1-1/2 lbs pickup magnet on opposite side
S27500-12	12" Slotted screw starter with 1-1/2 lbs pickup magnet on opposite side
S27500-18	18" Slotted screw starter with 1-1/2 lbs pickup magnet on opposite side

PHILLIPS SCREW STARTER WITH MAGNET

CAT. NO.	DESCRIPTION
S27700-6	6" Phillips screw starter with 1-1/2 lbs pickup magnet on opposite side
S27700-12	12" Phillips screw starter with 1-1/2 lbs pickup magnet on opposite side
S27700-18	18" Phillips screw starter with 1-1/2 lbs pickup magnet on opposite side

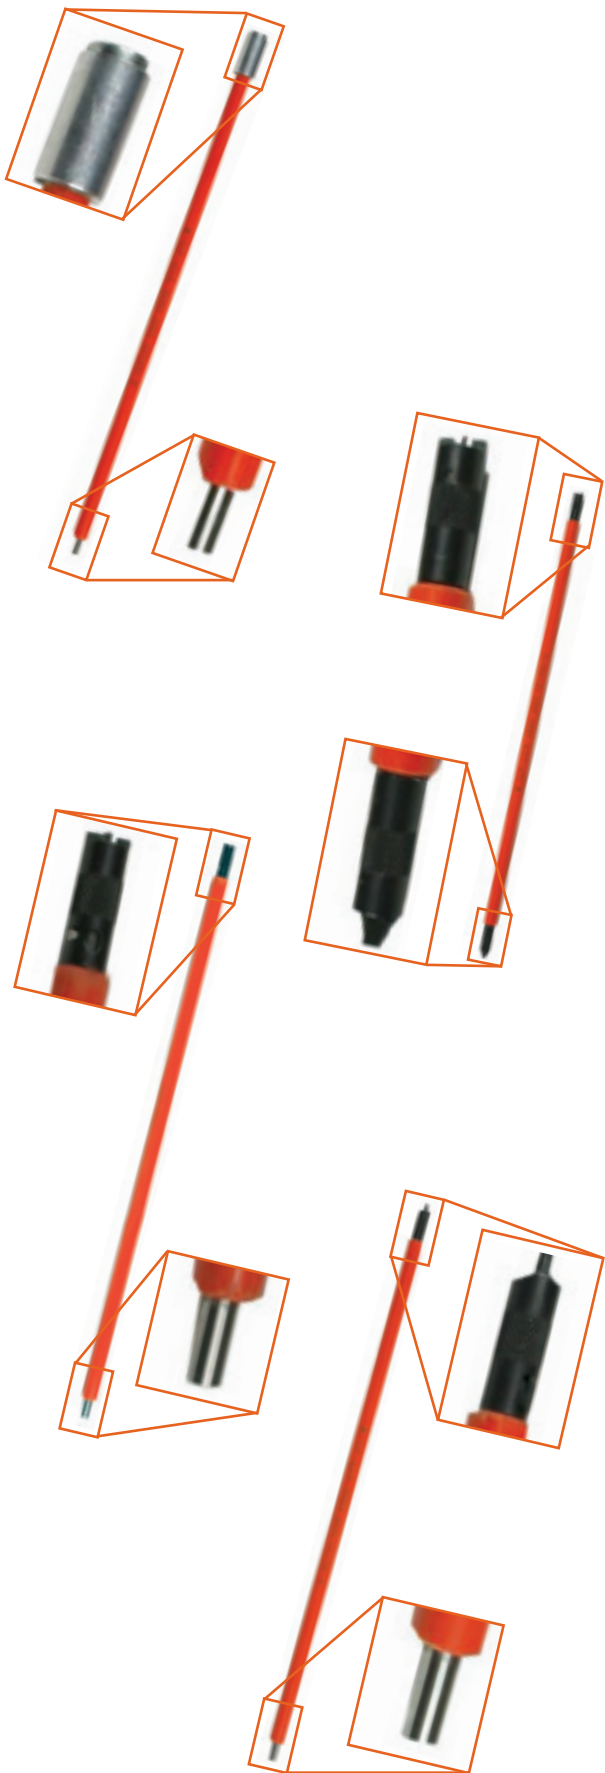

NON-CONDUCTIVE TOOLS



Pickup Magnet with
1-1/2 LBS Pulling Capacity
at each mirror end



INSPECTION - MIRRORS

CAT. NO.	DESCRIPTION
S276A2-6	7/8" Circular mirror, 6" OAL (Over All Length) with pickup magnet 1-1/2lbs pulling capacity at the other end
S276A2-12	7/8" Circular mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276A2-18	7/8" Circular mirror, 18" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276E2-6	1-1/4" Circular mirror, 6" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276E2-12	1-1/4" Circular mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276E2-18	1-1/4" Circular mirror, 18" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276C2-6	2-1/4" Circular mirror, 6" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276C2-12	2-1/4" Circular mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276C2-18	2-1/4" Circular mirror, 18" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276S2-6	3-1/4" Circular mirror, 6" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276S2-12	3-1/4" Circular mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276S2-18	3-1/4" Circular mirror, 18" OAL with pickup magnet 1-1/2lbs pulling capacity at the other end
S276K2-6	2-1/4 x 3-1/2" Rectangular mirror, 6" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276K2-12	2-1/4 x 3-1/2" Rectangular mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276K2-18	2-1/4 x 3-1/2" Rectangular mirror, 18" OAL with pickup magnet 1-1/2 lbs pulling capacity
S276B2-6	1 x 2" Oval mirror, 6" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276B2-12	1 x 2" Oval mirror, 12" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end
S276B2-18	1 x 2" Oval mirror, 18" OAL with pickup magnet 1-1/2 lbs pulling capacity at the other end

NON-SPARKING & NON-MAGNETIC SAFETY TOOLS

SPECIFICALLY DESIGNED TO ELIMINATE THE RISK OF DANGEROUS SPARKS.

NON-SPARKING & NON-MAGNETIC SAFETY TOOLS

Salisbury by Honeywell is proud to introduce the *New Non-Sparking/Non-Magnetic Insulated Hand Tools and Tool Kits*. This new introduction to the Insulated Hand Tool line are manufactured from special Aluminum-Bronze and Copper-Beryllium alloys for safe use in areas where hazardous, flammable, or combustible vapors, liquids, dusts, or residues may be present. These tools are also highly corrosion-resistant.

Aluminum bronze and copper beryllium non-sparking safety tools are specifically designed to eliminate the risk of sparks at sites where explosive atmospheres may be present.

Our safety tools are drop forged for the highest quality in hand tools. These corrosion-resistant tools are suitable for use in ship yards, laboratories and paper and pulp mills, as well as in the pharmaceutical, food product manufacturing and wine industries.

Every non-sparking/non-magnetic double insulated hand tool is rated for exposure up to 1000 VAC and dielectrically tested at 10,000 VAC. These tools meet or exceed ASTM 1505-07 and IEC 900 standards for insulated hand tools. These tools are necessary for compliance with OSHA 1910.333 (c)(2) and NFPA. These tools also meet CSA-2462 standards.

These tools utilize the same highly impact resistant insulating material as our established full line of insulated hand tools. The insulating material used is flame retardant and created with two-colors; making inspection easier and adding to the overall safety. If the yellow under layer is showing, the tool may no longer be insulated properly and should be considered for replacement and shall be removed from service.

Appropriate applications include industries where non-sparking safety tools are required. The non-magnetic feature of these alloys also make them ideal for working on special machinery with powerful magnets such as MRI machines, military de-mining and explosives.

INDUSTRIES REQUIRING HAND TOOLS WITH NON-SPARKING PROPERTIES

MANUFACTURING INDUSTRIES:

- Alcohol Industries
- Ammunition, Missile & Explosives Plants
- Automotive Plants
- Breweries & Distilleries
- Chemical Manufacturing
- Flammable Materials Manufacturing
- Flour Mills
- Furniture Manufacturers (Varnish and Painting)
- Gas Plants
- Glue Factories
- Ink Industries
- Liquefied Petroleum Gases (LPG)
- Mining
- Nuclear Products
- Oil & Natural Gas Drilling, Refining & Handling
- Paint, Lacquer & Varnish Products
- Paper and Pulp Mills
- Petrochemicals
- Petroleum Refining
- Pharmaceutical Industries
- Pipeline Construction & Maintenance
- Plastic Manufacturing
- Sugar Mills
- Synthetic Fiber Manufacturing
- Wine Industries

TRANSPORTATION INDUSTRIES:

- Airports
- Railroads
- Shipyards
- Tankers
- Tanker Trucks
- Vessels
- Workboats

GOVERNMENT AGENCIES:

- Aircraft & Missile Plants
- Airport (Refueling & Maintenance Operations)
- Armed Forces
- Chemical, Biological, Radiological, Nuclear or Explosives Logistical Support Operational Equipment
- Fire Departments, Military Bases
- First Responders to Weapons of Mass Destruction, Firefighters, Public Safety Bomb Squads & Local Rescue Squads
- Hazardous Materials Handling & Clean-up
- Munitions Depots
- Nuclear Production & Waste
- Public Utilities: Gas, Electric & Telecommunication
- Waste Management
- Water Treatment Facilities

OTHER INDUSTRIES:

- Cleaning & Spraying Operations
- Confined Space Maintenance
- Explosive & Pyrotechnics
- Geophysical Exploration
- Grain Storage & Handling
- Hazardous Material Handling
- Maintenance & Service Operations
- Paint Spraying, Finishing & Booth Operations
- Packing Plants
- Propane Distributors & Bulk Plants
- Warehousing of all Hazardous Materials

INDUSTRIES REQUIRING HAND TOOLS WITH NON-MAGNETIC PROPERTIES

- Aircraft Maintenance & Overhaul
- Aluminum & Other Metal Smelting
- Electronics Manufacturers
- Hospitals & Clinics Magnetic Resonance Imaging (MRI)
- MRI Maintenance
- Mine Sweepers
- Nuclear Products & Testing Machines
- Precision Magnetic Equipment
- Public Utilities: Gas, Electric & Telephone
- Radar Transmission Centers

INDUSTRIES REQUIRING HAND TOOLS WITH CORROSION-RESISTANT PROPERTIES

- Boat Owners
- Chemical Manufacturing
- Desalinization Plants
- Food Product Manufacturing
- Laboratories
- Paper & Pulp Mills
- Petrochemicals
- Pharmaceutical Industry
- Plastic Manufacturing
- Shipyards
- Tankers, Vessels & Other Work Boats
- Wine Industry

**INTRODUCING
NEW GREEN COLOR
OUTER COATING OVER
YELLOW COATING.**



OFFERING A FULL LINE OF TOOLS & TOOL KITS:

CONTACT CUSTOMER SERVICE FOR ADDITIONAL INFORMATION ON SALISBURY'S FULL OFFERING OF NON-SPARK NON-MAGNETIC INSULATED HAND TOOLS & KITS.

- Box End Wrenches
- Open End Wrenches
- Hex Wrenches
- Ratcheting Wrenches

- Pliers
- Cutters
- Socket Wrenches
- Screwdrivers

- Sockets
- Spanner Wrenches
- Tool Kits and more

NON-SPARKING & NON-MAGNETIC SAFETY TOOLS

KITS



NON-SPARKING & NON MAGNETIC BASIC ELECTRICIAN ROLL

CAT. NO.	DESCRIPTION
TK10NS	9 pcs. includes: 3/16 x 4 Slotted screwdriver 1/4 x 6 Slotted screwdriver 5/16 x 6 Slotted screwdriver #2 x 4 Phillips screwdriver #1 x 3 Phillips screwdriver 8" Needle nose Pliers 7 1/2" Diagonal Pliers 8" Lineman Pliers 10" Water pump Pliers In a tool roll bag


NON-SPARKING & NON MAGNETIC HYBRID TOOL KIT

CAT. NO.	DESCRIPTION
TK11HBNS	11 pcs. Includes: 8" Lineman Pliers 8" Slipjoint Pliers 6" Chain nose Pliers 6" Diagonal Pliers 10" Water pump Pliers #1 x 3 Phillips screwdriver #2 x 4 Phillips screwdriver 3/16 x 4 Slotted screwdriver 1/4 x 4 Slotted screwdriver 1/4 x 6 Slotted screwdriver 5/16 x 6 Slotted screwdriver In a plastic tool box

NON-SPARKING & NON MAGNETIC SCREWDRIVER KIT

CAT. NO.	DESCRIPTION
S23872NS	7 pcs. includes: 1/8 x 3 Slotted screwdriver 3/16 x 4 Slotted screwdriver 1/4 x 6 Slotted screwdriver 5/16 x 6 Slotted screwdriver #0 x 2 3/8 Phillips screwdriver #1 x 3 Phillips screwdriver #2 x 4 Phillips screwdriver In a tool roll bag
S23873NS	10 pcs. Includes: 1/8 x 3 Slotted screwdriver 3/16 x 4 Slotted screwdriver 1/4 x 6 Slotted screwdriver 5/16 x 6 Slotted screwdriver 3/8 x 8 Slotted screwdriver 3/8 x 12 Slotted screwdriver #1 x 3 Phillips screwdriver #2 x 4 Phillips screwdriver #3 x 6 Phillips screwdriver #4 x 8 Phillips screwdriver In a tool roll bag

**INTRODUCING
NEW GREEN COLOR
OUTER COATING OVER
YELLOW COATING.**



NON-SPARKING & NON MAGNETIC OPEN END WRENCH SETS

CAT. NO.	DESCRIPTION
S241714NS	14 pcs. wrench open 3/8" - 1-1/4" In a tool roll bag
S241713NS	13 pcs. wrench open 1/4" - 1" In a tool roll bag
S241814NS	13 pcs. Wrench open 7mm - 19mm In a tool roll bag
S241818NS	17 pcs. Wrench open 7mm - 24mm In a tool roll bag



NON-SPARKING & NON MAGNETIC BOX END WRENCH SETS

CAT. NO.	DESCRIPTION
S241714-BNS	14 pcs. Wrench box 3/8" - 1-1/4" In a tool roll bag
S241713-BNS	13 pcs. Wrench box 1/4" - 1" in a tool roll bag
S241814-BNS	13 pcs. Wrench box 7mm - 19mm In a tool roll bag
S241818-BNS	17 pcs. Wrench box 7mm - 24mm In a tool roll bag



NON-SPARKING & NON MAGNETIC HEX WRENCH TYPE "L" SET

CAT. NO.	DESCRIPTION
S2610214NS	14 pcs. 1/16" - 1/2" Long arm In a tool roll bag

NON-SPARKING & NON MAGNETIC METRIC HEX WRENCH TYPE "L"

CAT. NO.	DESCRIPTION
S2610610NS	12 pcs. Hex wrench 1.5mm - 12mm type I long arm In a tool roll bagnon-sparking & non magnetic Close Quarter Socket Sets

CAT. NO.	DESCRIPTION
S204947NS	1/4" Dr. set 13 pcs. includes : 1/4" ratchet 4" & 8" flared extensions, regular sockets 6pt: 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", and 9/16" In a plastic case.

THIS SET IS DESIGNED FOR USE IN TIGHT WORK SPACES.

S204654NS	3/8" Dr. set 14 pcs. includes : 3/8" ratchet 3" & 6" flared extensions, regular sockets 6pt: 1/4", 5/16", 3/8", 7/16", 1/2" 9/16", 5/8", 11/16", 3/4", 13/16" and 7/8" In a plastic case.
-----------	--

THIS SET IS DESIGNED FOR USE IN TIGHT WORK SPACES.

S204122NS	1/2" Dr. set 22 pcs. includes: 1/2" ratchet 4" & 8" flared extension, regular sockets 6pt : 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/8", 1 3/16", 1 1/4", 1 5/16", 1 3/8", 1 7/16", 1 1/2" In a plastic tool box.
-----------	--

THIS SET IS DESIGNED FOR USE IN TIGHT WORK SPACES.



Arc Flash: An arcing fault is the flow of current through the air between phase conductors or phase conductors and neutral or ground. An arcing fault can release tremendous amounts of concentrated radiant energy at the point of the arcing in a small fraction of a second resulting in extremely high temperatures, a tremendous pressure blast and shrapnel hurling at high velocity.

ASTM: American Society for Testing and Materials

Arc Thermal Performance Value (ATPV): This value is presented in calories per square centimeter and represents the maximum capability for arc flash protection of a particular garment. This rating also applies to fabrics; however, a garment made from more than one layer of arc flash rated fabric will have a calorie per square centimeter rating greater than the sum of the ATPV ratings of the original fabrics. The calories per square centimeter rating of most arc flash protection suits, coveralls and coats is commonly sewn into the fabric in large letters on the outside of the garment.

Calories per Centimeter Squared (cal/cm²): This is a number identifying the amount of energy that can be delivered to a Point at a particular distance from an arc flash. Once this value is known, the ATPV rating of the flash clothing required for work at that distance from the potential flash hazard is also known. See ATPV.

Calorie: A calorie is the energy required to raise one gram of water one degree Celsius at one atmosphere. The onset of second-degree burns may occur at 1.2 calories per centimeter squared per second. One calorie per centimeter squared per second can be equal to holding your finger over the tip of the flame of a cigarette lighter for one second.

De-energized: Free from any electrical connection to a source of potential difference and from electrical charge; not having a potential different from that of the earth.

Electrical Hazard: A dangerous condition such that contact or equipment failure can result in electric shock, arc flash burn, thermal burn, or blast.

Electrical Safety: Recognizing hazards associated with the use of electrical energy and taking precautions so that hazards do not cause injury or death.

Electrically Safe Work Condition: A state in which the conductor or circuit part to be worked on or near has been disconnected from energized parts, locked/tagged in accordance with established standards, tested to ensure the absence of voltage and grounded if determined necessary.

Energy Breakopen Threshold (EBT): Primarily, this addresses the physical strength of the fabric with respect to thermal energy and at what arc-flash value the fabric will fail.

Flame-Resistant (FR): The property of a material whereby combustion is prevented, terminated, or inhibited following the application of a flaming or non-flaming source of ignition, with or without subsequent removal of the ignition source.

Flash Hazard: A dangerous condition associated with the release of energy caused by an electric arc.

Flash Hazard Analysis: A study investigating a worker's potential exposure to arc-flash energy, conducted for the purpose of injury prevention, the determination of safe work practices and the appropriate levels of PPE.

Flash Protection Boundary: An approach limit at a distance from exposed live parts within which a person could receive a second degree burn if an electrical arc flash were to occur.

Flash Suit: A complete arc rated clothing and equipment system that covers the entire body, except for the hands and feet. This includes pants, jacket and bee-keeper-type hood fitted with a face shield.

IEEE: The Institute of Electrical and Electronics Engineers (IEEE) (Note: IEEE1584 – 2002 Guide to Performing Arc-Flash Hazard Calculations).

Incident Energy: The amount of energy impressed on a surface, a certain distance from the source, generated during an electrical arc event. One of the units used to measure incident energy is calories per centimeter squared (cal/cm²).

Limited Approach Boundary: An approach limit at a distance from an exposed live part within which a shock hazard exists.

NEC The National Electrical Code: The NFPA Standard 70-2005 "The National Electrical Code" (NEC) (Note: paragraph 110.16 contains requirements for warning labels).

NFPA: The National Fire Protection Association.

NFPA 70E Standard: Standard that provides guidance on implementing appropriate work practices that are required to safeguard workers from injury while working on or near exposed electrical conductors or circuit parts that could become energized.

OSHA: Occupational Safety and Health Administration.

OSHA 29 CFR 1910, Subpart S-Electrical: Occupational Safety and Health Standards. Section 1910 Subpart S-Electrical Standard number 1910.333 specifically addresses Standards for Work Practices.

Personal Protective Equipment (PPE): Categories defined by NFPA 70E to explain protection levels needed when performing tasks. The values range from -1 to 4. ATPV rated PPE is required for categories 1 through 4 as follows:

- Category 1: 4 cal/cm²
- Category 2: 8 cal/cm²
- Category 3: 25 cal/cm²
- Category 4: 40 cal/cm²

Prohibited Approach Boundary: An approach limit at a distance from an exposed live part within which work is considered the same as making contact with the live part.

Restricted Approach Boundary: An approach limit at a distance from an exposed live part within which there is an increased risk of shock, due to electrical arc over combined with inadvertent movement, for personnel working in close proximity to the live part.

Shock Hazard: A dangerous electrical condition associated with the possible release of energy caused by contact or approach to energized parts.

Voltage, Nominal: A nominal value assigned to a circuit or system for the purpose of conveniently designating its voltage class. The actual voltage at which a circuit operates can vary from the nominal within a range that permits satisfactory operation of equipment.

Working Near (live parts): Any activity inside a limited approach boundary.

Working On (live parts): Coming in contact with live parts with the hands, feet, or other body parts, with tools, probes, or with test equipment, regardless of the personal protective equipment a person is wearing.

PRODUCT INDEX

SAS ASSESSMENT SOLUTIONS

SAS Services	6-13
SAS Offerings	11
SAS Overview	7
SAS Safety Labels	12
SAS Safety Training	13

FACE, HEAD & NECK PROTECTION

2000V	19
4000V	19
10000V	19
AFHOOD10	22
AFHOOD15	22
AFHOOD20	22
AFHOOD28EO	22
AFHOOD28FF	22
AFLENS	17
AFLENSU	17, 19
Arc Flash Protection	
Hoods	22
AS12CLIP	17, 23
AS12CLR	17
AS12CLR-FB	16, 17
AS12ORG-FB	17
AS1000	18
AS1000FB	18
AS1000FS	19
AS1000HAT	18, 21
AS1000HAT Kit	21
AS1000U	18
AS1200	15, 17
AS1200FB	16, 17
AS1200FS	17, 19
AS1200FS-FB	17
AS1200HAT	15, 17, 21
AS1200HAT-CLR	15, 17
AS1200U	16, 17
AS2000	15
AS2000FS	15
AS2000HAT	21
ASBAG	18, 40
ASCP	20
ASFL	17, 23
ASSLB	20
BN-1	20
BRACKET	20
CE Marking	27
FBBRACKET	20
FH8BL-C	24
FH11BL-C	24
FH20BL-C	24
FH31RB-C	24
FH40GY-C	24
FH40PLT-C	24
FH55GY-C	24
FH75GY-C	24
FH100TW-C	24
FLCLIP	17, 23
FLKIT	17, 23
HN-1	20
LFH40	24, 28
Protective Faceshield Optional	
Accessories	17
Protective Nets	20
Replacement Arc Flash	
Protection Lenses	19
Replacement Brackets	20

SA79	18
SA79R	18
Safety Glasses	20
SKA10	21
SKA12	21
SKA20	21
Transparent Chin Guard	
AS12CLR	17
TS56505GRY	20
TS56505GRYA	20
TS56505GRYS	20

PERSONAL ELECTRICAL SHOCK PROTECTION & ACCESSORIES

1-21517	52
10-4	45, 52
10-4-4QT	45, 52
21	50
1192	51
1212YLV	50
1212YLVNV	50
1236YLV	50
1236YLVNV	50
1451	52
1452	52
1453	52
1460	52
1461	52
1818YLV	50
1818YLVNV	50
4556	52
4667	52
4769	52
20817	51
21405	48
21406	48
22629	51
51508	48
51509	48
51511	48
51512	48
AFG11	47
AFG20	47
AFG31	47
AFG40	47
AFG55	47
AFG100	47
ARC45-15	49
ARC45-40	49
ARC48-15	49
ARC48-40	49
ARC142	49
ARC142-K12	49
ARC142-K16	49
Arc Flash Gloves	47
Arc Protection Blankets	49
ASTM Specification	
Reference	42
B2	44
B22	44
Blanket Fasteners	50
Class 00	45
Class 0 Yellow Low voltage	
Insulating Blankets	50
Class 2	45
Clear PVC Roll Blankets	50
Dielectric Footwear	48
E00	45
E1	45
E2	45

E014BL9H	45
E0014R10H	45
E214YB10	45
External Rod	
Clampsticks	52
Ferrules	54
G99	48
G99B	48
G99S	48
G99V	48
G100	48
G100A	48
GB112	48
GB114	48
GB116	48
GB118	48
GK	47
GK011BL9	47
Glove Bags	48
Glove Inflator	48
GLove Kits	47
Glove Liners	46
H1	44
Hand Cleaner	
& Towelettes	52
ILP3S	46
ILP5S	46
ILP7C	46
ILP10	46
ILP10A	46
ILPG3S	46
ILPG5S	46
ILPG7C	46
ILPG10	46
ILPG10A	46
IMPORTANT SAFETY	
INFORMATION FOR PPE	53
Insulated Rescue Hook	51
Insulating Gloves	47
Insulating rubber gloves	45
L10JK	46
L10MKW	46
L12J	46
Leather Protectors	46
Low Voltage molded Sleeves	44
Low-volt Blankets	50
M24-2	49
M30-2	49
M36-2	49
M36-4	49
M48-2	49
MB6	50
Protective Rubber Equipment	
Labeling Chart	42
RLB00	50
RLB1	50
RLBPVC1	50
Roll Blankets	50
RUB-OUT®	
Hand Cleaner	52
S1	44
Sleeve Buttons, Straps, and	
Harnesses	44
Static Discharge Stick	51
Switchboard Matting	49
T31	44
T32	44
TEN-FOUR®	
Glove Dust	45, 52
Tool Holder SALCOR®	51
Type I 2RB	44
Type I 3LY	44

Type II 2ROS	44
Voltage Detectors	52

PRO-WEAR® ARC FLASH PROTECTION CLOTHING & KITS

8 cal/cm² to 20 cal/cm²	
PPE Kits	34
31 cal/cm² PPE Kits	34
40 cal/cm² PPE Kits	36
55 cal/cm² & 75 cal/cm²	
PPE Kits	36
100 cal/cm² PPE Kits	37
ACB830BL	30
ACB1130BL	30
ACB2030BL	30
ACB3130RB	30
ACB4030GY	30
ACB4030PLT	30, 35
ACB5530GY	30
ACB7530GY	30
ACB10030TW	30
ACC832BL	29
ACC1132BL	29
ACC2032BL	29
ACC3132RB	29
ACC4032GY	29
ACC4032PLT	29, 35
ACC5532GY	29
ACC7532GY	29
ACC10032TW	29
ACCA8BL	31
ACCA11BL	31
ACCA20BL	31
ACP830BL	31
ACP1130BL	31
ACP2030BL	31
Arc Flash Protection	
Hood	28
Arc Flash protection Premium	
Coverall Kits	33
Arc Flash protection Premium	
Coveralls	31, 32
Arc Flash protection Premium	
overpants	31
Clothing Kits Sizing	26
FH8BL	28
FH11BL	28
FH20BL	28
FH31RB	28
FH40GY	28
FH40PLT	28, 35
FH40PLT-C	35
FH55GY	28
FH75GY	28
FH100TW	28
Flash Protection	
Bib Overalls	30
Flash Protection Coats	29
PPE Category	
PPE Chart	41
Heavy Duty Tool Bag	40
material weights	26
Material Weights	
& Sizing	26
Personal Protection	
Equipment Kits	34
PRO-WEAR® Premium	
Light weight	22, 23, 35
SK8	34
SK11	34

SK 20	34
SK31	34
SK40	36
SK40PLT	35, 36
SK40PLT-C	35
SK55	36
SK75	36
SK100	37
SKBACKPACK	40
SKBAG	40
SKCA8	33
SKCA11	33
storage bag	40
The Ultimate	
Back Pack	40
UWG-GPU	39
UWG-HUXT	39
UWG-KLG	39
UWG-WPGC	39
UWG-WPSC	39

INSULATED HAND TOOLS (SIP) & KITS

Salisbury Insulated Products (S.I.P.)	63
1/2" Drive Hex Bit	
Socket	80
1/2" Hex Bit Socket	80
1/2" Torx Bit Socket	79
1/4" Drive Hex	
Bit Socket	80
1/4" Drive Screwdriver	
Bit Sockets	78
1/4" Hex Bit Socket	80
1/4" Tamper-Proof	
Torx Bit Socket	79
1/4" Torx Bit Socket	79
3/8" Drive Hex	
Bit Socket	81
3/8" Drive Screwdriver	
Bit Sockets	78
3/8" Hex Bit Socket	81
3/8" Tamper-Proof Torx Bit	
Socket	79
3/8" Torx Bit Socket	79
6" Long "T" Handle	
Hex Wrench	65
1000V Electrical Insulated	
Tool Kit	58
1000V Utility Insulated	
Hand Tool Kits	58
Accessories	84
Adapters	76
Adjustable Bug Wrench	66
Adjustable Magnets	84
Adjustable Wrench	66
Allen Socket Set	82
Basic Electrician Roll	56
Battery Torque Set	82
Bent Needle Nose Pliers	68
Bent Needle Nose Pliers	68
Bolt Cutter	71
Box End Wrench	64
Box End Wrench Metric	
Sizes - 12 Point	64
Box End Wrench	
SAE Sizes - 12 Point	64
Box End Wrench Set	63
Boxes And Rolls	84
Box PB-16	84
Box-TK30	84

PRODUCT INDEX

Box-TK60	84	Magnetic Bit Tip		ROLL-05	84	S24RB-58	64	S21516	69
Cable Cutter	71	Screwdriver	61	ROLL-06	84	S24RB-60	64	S21537	68
Cable Shear	71	Metric Deluxe Maintenance		ROLL-08	84	S24RB-64	64	S21546	68
Close Quarters		Tool Kit	60	ROLL-10	84	S24RB-68	64	S21548	68
Socket Set	83	Metric Electrician's		ROLL-11	84	S24RBM-10	65	S21611	70
Crimping Tool	69	Tool Kit	59	Rounded Nose Plier	69	S24RBM-15	65	S21718	68
Curved Cutting Pliers	67	Metric Hot Box Tool Kit Without		Rounded Nose Pliers	69	S30PFP-1	84	S21728	68
Cutting Pliers	69	Torque Wrench	59	S10TK12	57	S101	55	S21738	68
Cutting Pliers, Box Joint	68	Metric Hvac Tool Kit	60	S10TK12M	59, 60	S101M	60	S21748	68
Cutting Pliers, Lap Joint	67	Metric Inside Maintenance		S10TK23	55	S102	82	S21908	69
Cutting Pliers, Lap Joint	67	Box	59	S10TK23M	60	S103	82	S21909	69
Deep Socket	72, 73, 74	Metric Insulated		S10TK25	56	S103-ST	82	S21911	69
Deluxe Maintenance		Tool Kits	59	S10TK25M	59	S104	82	S23869	62
Tool Kit	56, 59	Metric Outside Maintenance		S10TK40	56	S105	82	S23870	62
Double End		Box	60	S10TK40M	59, 60	S106	82	S23871	62
Pickup Magnet	85	Metric Telecommunication		S21D305-6	68	S601	82	S23872NS	88
Double End Screw		Tool Box	60	S21GL6	69	S602	82	S23873NS	88
Starters	85	Metric Telecommunication		S21GL10	69	S602M	82	S23873NS	88
Electrician's Tool Kit	57	Tool Power		S21GL12	69	S603	82	S24804	66
End Cutting Nippers	68	Connecting Kit	60	S22TCI75FRN	67	S2144	68	S24806	66
End Cutting Pliers	68			S22TCI150FRN	67	S2147S	67	S24808	66
Extensions	77	Non-Conductive		S22TCI150RA	67	S2149	68	S24810	66
Extensions With		Tools	85, 86	S22TCI150RA38	67	S2150S	67	S24812	66
Flare End	77	Non-Sparking & Non Magnetic		S22TCI250FRN	67	S2610M	65	S24815	66
Fence Tool	67	Basic Electrician Roll	88	S22TCI250RA	67	S2613P	65	S24818	66
Fiberglass Extensions	77	Non-Sparking & Non Magnetic		S22TCI750R	67	S20384	76	S24824	66
Flat Nose Plier	68	Box End Wrench Sets	89	S22TS35	67	S20385	76	S25921	62
Flex Head Handles	76	Non-Sparking & Non		S22TS100	67	S20401	76	S25922	62
Hacksaw	71	Magnetic Close Quarter		S24C26	63	S20407	76	S25922L	62
Heavy Duty Slip		Socket Sets	89	S24C26-B	64	S20409	76	S25925	62
Joint Pliers	68	Non-Sparking & Non		S24C28	63	S20451	76	S25925L	62
Hex Wrench "T"		Magnetic Hex Wrench		S24C28-B	64	S21148-10	68	S27300-6	85
Handle Set	65	Type "L" Set	89	S24C30	63	S21148-14	68	S27300-12	85
Hex Wrench		Non-Sparking & Non Magnetic		S24C30-B	64	S21308	68	S27300-18	85
Type "L" Set	65	Hybrid Tool Kit	88	S24C32	63	S21310	70	S27400-6	85
Hook & Pick	84	Non-Sparking & Non Magnetic		S24C32-B	64	S21311	70	S27400-12	85
Hvac Tool Kit	57	Metric Hex		S24C34	63	S21317	67	S27400-18	85
Inside Maintenance Box	56	Wrench Type "L "	89	S24C34-B	64	S21318	67	S27500-6	85
Inspection - Mirrors	86	Non-Sparking & Non Magnetic		S24C36	63	S21326	67	S27500-12	85
Insulated Hand		Open End Wrench Sets	89	S24C36-B	64	S21337	67	S27500-18	85
Tool Markings	55	Non-Sparking & Non-Magnetic		S24C40	63	S21337W	67	S27700-6	85
Insulated Hand Tools	54	Safety Tools	87, 88, 89	S24C40-B	64	S21338	67	S27700-12	85
Insulated Nutdrivers	62	Non-Sparking & Non Magnetic		S24C42	63	S21346	69	S27700-18	85
Insulated Robertson		Screwdriver Kit	88	S24C42-B	64	S21347	69	S30385	84
Screwdrivers	61	Open End Wrench	63	S24C44	63	S21348	69	S90001	84
Insulated Slotted		Open End Wrench Sets	63	S24C44-B	64	S21350-S	69	S201340	83
Screwdrivers	61	Outside Maintenance		S24C46	63	S21356	68	S201919	83
Insulated Tool Kits	55	Box	56	S24C46-B	64	S21357	68	S204121	83
Insulated Torx		Phillips Screw Starter		S24C48	63	S21358	68	S204122	83
Screwdrivers	61	With Magnet	85	S24C48-B	64	S21369	69	S204122NS	89
KN985313	84	Pliers	68, 69, 71	S24C52	63	S21371	70	S204653	83
Lineman Pliers	69	Pliers	67	S24C52-B	64	S21372	70	S204654NS	89
Long Arm Hex Wrench	66	Pliers W/ Side Cutters	69	S24C54	63	S21373	70	S204946	83
Long Needle Nose Pliers	67	Pocket Magnets	84	S24C54-B	64	S21386	68	S204947NS	89
Long Reach Cable		Ratcheting		S24C56	63	S21415	69	S208406	73
Gripping Pliers	70	Box End Wrench	64	S24C56-B	64	S21420	69	S208407	73
Long Reach Chain Nose	70	Ratcheting Box End Wrench		S24C58	63	S21422	68	S208408	73
Long Reach Diagonal		6 Point Metric Sizes	64	S24C58-B	64	S21424	69	S208409	73
Cutters	70	Ratcheting Box End Wrench		S24C60	63	S21426	69	S208420	73
Long Reach End Cutter	68	12 Ptoint Metric Sizes	64	S24C60-B	64	S21430	69	S208421	73
Long Reach Flat Nose	70	Ratcheting Box End Wrench		S24C64	63	S21435	68	S208422	73
Long Reach		12 Point Sae Sizes	64	S24C64-B	64	S21435S	68	S208423	73
Needle Nose	70	Ratcheting Box End Wrench		S24RB-12	65	S21436	68	S208424	73
Long Reach Oval Head	70	Set	65	S24RB-13	65	S21436S	68	S208425	73
Long Reach Plier	68	Ratcheting Cable Cutter	71	S24RB-42	64	S21437	68	S208426	73
Long Reach Pliers	70	Ratchets	76	S24RB-44	64	S21440	69	S208429	73
Long Reach Pliers	68	Ratchet & Socket		S24RB-46	64	S21442	68	S208430	73
Long Reach Slip Joint		Accessories	76, 77, 78, 79, 80, 81	S24RB-48	64	S21460	69	S208431	73
Cable Grippers	70	Ratchet & Socket		S24RB-50	64	S21480	69	S208432	73
Long Reach Slip Joint		Sets	82, 83	S24RB-52	64	S21510	70	S208433	73
Pliers	70	ROLL-04	84	S24RB-54	64	S21512	70	S208434	73
Long Reach Thin Head	70			S24RB-56	64	S21514	70	S208435	73

PRODUCT INDEX

S208436.....	73	S248323.....	63	S262231.....	66	S2041207.....	81	S2042432.....	73
S208437.....	73	S248323-B.....	64	S262233.....	66	S2041208.....	81	S2042507.....	79
S208438.....	73	S248324.....	63	S262235.....	66	S2041209.....	81	S2042508.....	79
S208439.....	73	S248324-B.....	64	S262239.....	66	S2041210.....	81	S2042510.....	79
S211005.....	69	S248325.....	63	S262243.....	66	S2041211.....	81	S2042515.....	79
S211202R.....	71	S248325-B.....	64	S262247.....	66	S2041212.....	81	S2042520.....	79
S213202R.....	71	S248326.....	63	S262251.....	66	S2041213.....	80	S2042525.....	79
S213248.....	69	S248326-B.....	64	S262255.....	66	S2041214.....	80	S2042527.....	79
S213402R.....	71	S248327.....	63	S262259.....	66	S2041215.....	80	S2042530.....	79
S214044.....	70	S248327-B.....	64	S262267.....	66	S2041216.....	80	S2042580.....	79
S214046.....	70	S248328.....	63	S262275.....	66	S2041218.....	80	S2042590.....	79
S214048.....	70	S248328-B.....	64	S262283.....	66	S2041220.....	80	S2042595.....	79
S214050.....	70	S248329.....	63	S262291.....	66	S2041221.....	80	S2042600.....	79
S214052.....	70	S248329-B.....	64	S262344.....	65	S2041222.....	80	S2042640.....	79
S214054.....	70	S248330.....	63	S302375.....	84	S2041225.....	81	S2042645.....	79
S215090FS.....	71	S248330-B.....	64	S2040120.....	74	S2041226.....	81	S2042650.....	79
S215410.....	68	S248332.....	63	S2040122.....	74	S2041266.....	80	S2042655.....	79
S215602R.....	71	S248332-B.....	64	S2040124.....	74	S2041268.....	80	S2042908.....	79
S241713.....	63	S248336.....	63	S2040126.....	74	S2041270.....	80	S2042910.....	79
S241713-B.....	63	S248336-B.....	64	S2040128.....	74	S2041310.....	81	S2042915.....	79
S241713-BNS.....	89	S249008.....	64	S2040130.....	74	S2041400.....	81	S2042920.....	79
S241713NS.....	89	S249010.....	64	S2040132.....	74	S2041401.....	81	S2042925.....	79
S241714.....	63	S249011.....	64	S2040134.....	74	S2041402.....	81	S2042927.....	79
S241714-B.....	63	S249012.....	64	S2040136.....	74	S2041403.....	81	S2042930.....	79
S241714-BNS.....	89	S249013.....	64	S2040138.....	74	S2041404.....	81	S2042958.....	79
S241714NS.....	89	S249014.....	64	S2040140.....	74	S2041405.....	81	S2042960.....	79
S241718NS.....	89	S249015.....	64	S2040142.....	74	S2041406.....	81	S2042965.....	79
S241780.....	63	S249016.....	64	S2040144.....	74	S2041407.....	81	S2042970.....	79
S241780-B.....	63	S249018.....	64	S2040146.....	74	S2041408.....	81	S2042975.....	79
S241790.....	63	S249020.....	64	S2040148.....	74	S2041409.....	81	S2042977.....	79
S241790-B.....	63	S249022.....	64	S2040212.....	74	S2041410.....	81	S2043906.....	72
S241814.....	63	S249024.....	64	S2040214.....	74	S2041411.....	81	S2043907.....	72
S241814-B.....	63	S249026.....	64	S2040216.....	74	S2041412.....	80	S2043908.....	72
S241814-BNS.....	89	S249028.....	64	S2040218.....	74	S2041413.....	80	S2043909.....	72
S241814NS.....	89	S249030.....	64	S2040701.....	72	S2041414.....	80	S2043910.....	72
S241818.....	63	S249032.....	64	S2040702.....	72	S2041416.....	80	S2043911.....	72
S241818-B.....	63	S249034.....	64	S2040703.....	72	S2041417.....	80	S2043912.....	72
S241818-BNS.....	89	S249036.....	64	S2040704.....	72	S2041419.....	80	S2043914.....	72
S241818NS.....	89	S249038.....	64	S2040705.....	72	S2041462.....	80	S2043916.....	72
S248306.....	63	S249106.....	64	S2040706.....	72	S2041463.....	80	S2043918.....	72
S248306-B.....	64	S249107.....	64	S2040707.....	72	S2041464.....	80	S2044205.....	79
S248307.....	63	S249108.....	64	S2040708.....	72	S2041466.....	80	S2044206.....	79
S248307-B.....	64	S249109.....	64	S2040709.....	72	S2041467.....	80	S2044207.....	79
S248308.....	63	S249110.....	64	S2040710.....	72	S2041469.....	80	S2044208.....	79
S248308-B.....	64	S249111.....	64	S2040711.....	72	S2041502.....	81	S2044209.....	79
S248309.....	63	S249112.....	64	S2040712.....	72	S2041503.....	81	S2044210.....	79
S248309-B.....	64	S249113.....	64	S2040713.....	72	S2041504.....	81	S2044212.....	79
S248310.....	63	S249114.....	64	S2040714.....	72	S2041505.....	81	S2044214.....	79
S248310-B.....	64	S249115.....	64	S2040812.....	74	S2041506.....	81	S2044216.....	79
S248311.....	63	S249116.....	64	S2040814.....	74	S2041507.....	81	S2044304.....	80
S248311-B.....	64	S249117.....	64	S2040816.....	74	S2041508.....	81	S2044305.....	80
S248312.....	63	S249118.....	64	S2040818.....	74	S2041509.....	81	S2044306.....	80
S248312-B.....	64	S249119.....	64	S2040820.....	74	S2041510.....	81	S2044307.....	80
S248313.....	63	S249120.....	64	S2040822.....	74	S2041511.....	81	S2044308.....	80
S248313-B.....	64	S249121.....	64	S2040824.....	74	S2041613.....	80	S2044309.....	80
S248314.....	63	S249122.....	64	S2040826.....	74	S2041614.....	80	S2044310.....	80
S248314-B.....	64	S249123.....	64	S2040828.....	74	S2041615.....	80	S2044312.....	80
S248315.....	63	S249124.....	64	S2040830.....	74	S2041621.....	80	S2044314.....	80
S248315-B.....	64	S249125.....	64	S2040832.....	74	S2041622.....	80	S2044316.....	80
S248316.....	63	S249126.....	64	S2040834.....	74	S2041697.....	72	S2044324.....	80
S248316-B.....	64	S249127.....	64	S2040836.....	74	S2041711.....	72	S2044325.....	80
S248317.....	63	S249129.....	64	S2040838.....	74	S2042408.....	73	S2044326.....	80
S248317-B.....	64	S249130.....	64	S2040840.....	74	S2042410.....	73	S2044327.....	80
S248318.....	63	S249132.....	64	S2040842.....	74	S2042412.....	73	S2044328.....	80
S248318-B.....	64	S249134.....	64	S2040844.....	74	S2042414.....	73	S2044330.....	80
S248319.....	63	S249136.....	64	S2040846.....	74	S2042416.....	73	S2044470.....	78
S248319-B.....	64	S262223.....	66	S2040848.....	74	S2042418.....	73	S2044471.....	78
S248320.....	63	S262224.....	66	S2041201.....	81	S2042420.....	73	S2044472.....	78
S248320-B.....	64	S262225.....	66	S2041202.....	81	S2042422.....	73	S2044473.....	78
S248321.....	63	S262226.....	66	S2041203.....	81	S2042424.....	73	S2044480.....	78
S248321-B.....	64	S262227.....	66	S2041204.....	81	S2042426.....	73	S2044481.....	78
S248322.....	63	S262228.....	66	S2041205.....	81	S2042428.....	73	S2044482.....	78
S248322-B.....	64	S262229.....	66	S2041206.....	81	S2042430.....	73	S2044483.....	78

PRODUCT INDEX

S2044570.....	78	S2045684.....	78	S2341427.....	61	S2610614.....	65	slip-light.....	84
S2044571.....	78	S2045904.....	81	S2341430.....	61	S2615603.....	66	Slip Joint Plier.....	69
S2044572.....	78	S2045905.....	81	S2341440.....	61	S2615604.....	66	Slip Joint Pliers.....	69
S2044573.....	78	S2045906.....	81	S2341445.....	61	S2615605.....	66	Slotted Screw Starter	
S2044581.....	78	S2045907.....	81	S2341450.....	61	S2615606.....	66	With Magnet.....	85
S2044582.....	78	S2045908.....	81	S2375704.....	61	S2615607.....	66	Snap Ring Plier.....	71
S2044583.....	78	S2045909.....	81	S2375705.....	61	S2615608.....	66	Sockets - 1/2" Drive.....	74
S2044702.....	72	S2045910.....	81	S2375706.....	61	S2615609.....	66	Sockets - 1/4" Drive.....	72
S2044703.....	72	S2045912.....	81	S2375708.....	61	S2615610.....	66	Sockets - 3/4" Drive.....	75
S2044704.....	72	S2045913.....	81	S2375710.....	61	S2615611.....	66	Sockets - 3/8" Drive.....	73
S2044706.....	72	S2045914.....	81	S2375712.....	61	S2615612.....	66	Socket Set 3/8" Driver Deep	
S2044707.....	72	S2047124.....	75	S2375904.....	61	S2615614.....	66	Set.....	82
S2044708.....	72	S2047126.....	75	S2375906.....	61	S2615616.....	66	Specialized Tools.....	84
S2044709.....	72	S2047128.....	75	S2375908.....	61	S2615618.....	66	Standard	
S2044710.....	72	S2047130.....	75	S2375910.....	61	S2615620.....	66	Socket.....	72, 73, 74
S2044711.....	72	S2047132.....	75	S2376102.....	61	S2615622.....	66	Tamper-Proof	
S2044712.....	72	S2047134.....	75	S2376103.....	61	S2615624.....	66	Torx Bit Socket.....	79
S2044713.....	72	S2047136.....	75	S2376103A.....	61	S2615628.....	66	Telecommunication	
S2044883.....	78	S2047138.....	75	S2376104.....	61	S2615634.....	66	Tool Box.....	55
S2044906.....	72	S2047140.....	75	S2376105.....	61	S2615638.....	66	Thin Profile Electronics	
S2044907.....	72	S2047142.....	75	S2376105A.....	61	S2615644.....	66	Pliers.....	70
S2044908.....	72	S2047144.....	75	S2376106.....	61	S2615648.....	66	TK9.....	56
S2044909.....	72	S2047146.....	75	S2376108.....	61	S2615651.....	66	TK10NS.....	88
S2044910.....	72	S2047148.....	75	S2376302.....	61	S2615656.....	66	TK11HBNS.....	88
S2044911.....	72	S2047150.....	75	S2376802.....	61	S2615660.....	66	TK12HB.....	58
S2044912.....	72	S2047152.....	75	S2376806.....	61	S2631605.....	65	TK13TC.....	58
S2044914.....	72	S2047154.....	75	S2377610.....	61	S2631606.....	65	TK15LM.....	58
S2044916.....	72	S2047156.....	75	S2377611.....	61	S2631607.....	65	TK16MT.....	58
S2044918.....	72	S2047158.....	75	S2377620.....	61	S2631608.....	65	TK24SS.....	58
S2045120.....	73	S2047160.....	75	S2377621.....	61	S2631609.....	65	TK30.....	56
S2045122.....	73	S2047164.....	75	S2377630.....	61	S2631610.....	65	TK30ETK.....	57
S2045124.....	73	S2047168.....	75	S2377631.....	61	S2631611.....	65	TK30ETKM.....	60
S2045126.....	73	S2047171.....	75	S2470221.....	66	S2631612.....	65	TK30M.....	59
S2045128.....	73	S2047172.....	75	S2470222.....	66	S2631614.....	65	TK60.....	57
S2045130.....	73	S2047176.....	75	S2488408.....	63	S2631616.....	65	TK60E.....	57
S2045132.....	73	S2048010.....	74	S2488408-B.....	64	S2631620.....	65	TK60EM.....	59
S2045208.....	73	S2048011.....	74	S2488410.....	63	S2631622.....	65	TK60M.....	59
S2045210.....	73	S2048012.....	74	S2488410-B.....	64	S2631624.....	65	Tongue & Groove Plier.....	69
S2045212.....	73	S2048013.....	74	S2488412.....	63	S2631628.....	65	Torque Screwdriver.....	67
S2045214.....	73	S2048014.....	74	S2488412-B.....	64	S2631632.....	65	Torque Wrenches.....	67
S2045216.....	73	S2048015.....	74	S2488414-B.....	64	S2631634.....	65	Torque Wrenches.....	67
S2045218.....	73	S2048016.....	74	S2488416.....	63	S2634620.....	65	"T" Socket Driver.....	76
S2045220.....	73	S2048017.....	74	S2488416-B.....	64	S2634625.....	65	Ull-N-4.....	84
S2045440.....	79	S2048018.....	74	S2488418.....	63	S2634630.....	65	Ull-Pn-12.....	84
S2045445.....	79	S2048019.....	74	S2488418-B.....	64	S2634640.....	65	V Groove Plier.....	68
S2045450.....	79	S2048020.....	74	S2488420.....	63	S2634650.....	65	Waterpump Plier.....	68
S2045455.....	79	S2048021.....	74	S2488420-B.....	64	S2634660.....	65	Waterpump Pliers.....	69
S2045471.....	78	S2048022.....	74	S2488422.....	63	S2634680.....	65	Wire Stripper.....	69
S2045472.....	78	S2048023.....	74	S2488422-B.....	64	S2634690.....	65	Wire Stripper-Cutter	
S2045473.....	78	S2048024.....	74	S2488424.....	63	S2634691.....	65	-Crimper.....	69
S2045474.....	78	S2048025.....	74	S2488424-B.....	64	S2634692.....	65	Wiring Plier.....	67
S2045475.....	78	S2048026.....	74	S2542010.....	62	S2742614.....	61	Wiring Pliers.....	67
S2045481.....	78	S2048027.....	74	S2542030.....	62	S3042996.....	84	Wrenches.....	64, 66
S2045482.....	78	S2048028.....	74	S2542050.....	62	S3042996-1.....	84		
S2045483.....	78	S2048030.....	74	S2542060.....	62	S3042996-2.....	84		
S2045484.....	78	S2048032.....	74	S2542070.....	62	S3042996-3.....	84		
S2045540.....	79	S2089023.....	83	S2542080.....	62	S3042996-4.....	84		
S2045545.....	79	S2094712E.....	83	S2542090.....	62	S21120245R.....	71		
S2045547.....	79	S2111045.....	69	S2542100.....	62	S21120290R.....	71		
S2045550.....	79	S2112098.....	69	S2542110.....	62	S21320245R.....	71		
S2045555.....	79	S2137145.....	70	S2542710.....	62	S21320290R.....	71		
S2045560.....	79	S2161145.....	70	S2542730.....	62	S21340245R.....	71		
S2045565.....	79	S2161190.....	70	S2542750.....	62	S21340290R.....	71		
S2045570.....	79	S2163030.....	71	S2542760.....	62	S21560245R.....	71		
S2045580.....	79	S2163035.....	71	S2542770.....	62	S21560290R.....	71		
S2045671.....	78	S2163035-RING.....	71	S2542780.....	62	Screwdriver & Nutdriver			
S2045672.....	78	S2163041.....	71	S2542790.....	62	Sets.....	62		
S2045673.....	78	S2163041-RING.....	71	S2542800.....	62	Screwdriver Sets With			
S2045674.....	78	S2163055-RING.....	71	S2610214.....	65	Cushion Grip.....	62		
S2045675.....	78	S2341410.....	61	S2610214NS.....	89	Screwdrivers			
S2045681.....	78	S2341415.....	61	S2610217.....	65	& Nutdrivers.....	61		
S2045682.....	78	S2341420.....	61	S2610610.....	65	Screwstarters.....	84		
S2045683.....	78	S2341425.....	61	S2610610NS.....	89	Short Nose Plier.....	68		

LIMITED WARRANTY

Salisbury by Honeywell Line Equipment is warranted for a period of twelve (12) month from the date of shipment of the products to be free from defects and meet or exceed the current ASTM standards. Our only obligation will be, at our option, to replace any portion proving defective or to refund the purchase price thereof. The buyer assumes all other risk, if any, such as the risk of any direct, indirect or consequential loss or damage arising out of the use of or inability to use, these products.

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND MAY NOT BE VARIED OR EXTENDED EXCEPT IN WRITING BY AN AUTHORIZED OFFICIAL OF SALISBURY.

Salisbury by Honeywell

Your complete safety solution.

We have everything you need to meet the NFPA 70E Standards and OSHA 29 1910.269 Regulations. Which have been established to protect workers from electrical shock and arc flash hazards. For example, the NFPA 70E Standard specifies areas in which arc flash protection is required for workers. All personnel within the defined boundaries must wear specified protective equipment, even on circuits as low as 50 volts. The NFPA 70E Standard and OSHA Regulations MUST be met, and Salisbury has made it easy to meet them.

We take your safety seriously.

AUTHORIZED DISTRIBUTOR



facebook.com/SalisburybyHoneywell



youtube.com/Salisbury1855

SALISBURY

by Honeywell

Honeywell Safety Products

101 E. Crossroads Pkwy, Ste A

Bolingbrook, IL 60440 USA

Phone: 1-630-343-3800

Fax: 1-630-343-3838

www.salisburybyhoneywell.com

ARCCAT-121215-RV102015

January 2016

© 2016 Honeywell International Inc.

Honeywell