

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Ratchets: Square Drive Lever Control


Premium quality ratchets with a secret weapon. The Cementex "X-Drive" System available on our 3/8" and 1/2" square drive ratchets extends the drive of these ratchets to allow for direct connection of Insulated Sockets; eliminating the requirement of an extension bar, and allowing access to tight places. The large lever control makes adjustments easy even while wearing insulating gloves.



Ratchets	Square Drive			Profile		Tang Style	
	1/4"	3/8"	1/2"	Standard	Low	X Drive	Short
IR14-LC	*			*			*
IR14-LCS	*			*			*
IR14-LCLP	*			*			*
IR38-LC		*		*		*	
IR38-LCS		*		*		*	
IR38-LCLP		*		*		*	
IR38-LCSD		*		*		*	
IR38-LCLPSD		*		*		*	
IR12-LC			*	*		*	
IR12-LCS			*	*		*	
IR12-LCLP			*	*		*	
IR12-LCSD			*	*		*	
IR12-LCLPSD			*	*		*	




IR38-LC and IR38-LCS




**Standard Profile
Cementex X-Drive**

1/4" Dr. = n/a
3/8" Dr. = 2.60"
1/2" Dr. = 2.90"
30250TW 3/8" Dr. = 2.60"




**Low Profile
Cementex X-Drive**

1/4" Dr. = n/a
3/8" Dr. = 2.60"
1/2" Dr. = 2.90"
30250TW 3/8" Dr. = 2.30"



**Regular Profile
Short Drive**

1/4" Dr. = 1.83"
3/8" Dr. = 2.20"
1/2" Dr. = n/a
30150TW 1/4" Dr. = 1.90"
30150TW 3/8" Dr. = 2.08"



**Low Profile
Short Drive**

1/4" Dr. = 1.48"
3/8" Dr. = 1.85"
1/2" Dr. = n/a
30150TW 1/4" Dr. = 1.56"
30150TW 3/8" Dr. = 1.68"

Ratchets

RATED
1000 VAC / 1500 VDC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Torque Wrenches

- Audible "click" and/or a few degrees of travel provide simple, fast indication of micrometer - accurate torque settings.
- Low friction torque control mechanism produces accurate readings in either direction.
- All torque wrenches have tolerance limits of +/-4% in clockwise (right-hand) setting.
- Two calibration adjustments (major and fine) permit easy and precise torque settings. Most conventional torque wrenches have only one adjustment.
- Dual scale models give readings in Inch-Pounds/Newton Meters or Foot-Pounds/Newton Meters.
- Spring-loaded or Twist-locking collar locks scale on desired reading and remains in locked position. Wrench cannot be left inadvertently unlocked.
- Heavy-Duty, reversible ratchet models have quick-shift lever to allow easy single-hand shifting.
- Always store all adjustable models at their lowest torque setting.

National Electrical Code 2017 - 110.14(D)

Installation - where a tightening torque is indicated as a numeric value on equipment or in installation instructions provided by the manufacturer, a calibrated torque tool shall be used to achieve the indicated torque value, unless the equipment manufacturer has provided installation instructions for an alternative method to achieve the required torque.



40200TW38I

50250TW38I



25250TW12F
Standard Profile

30150TW38I-NR
Clockwise Only

40200TW38I-LP
Low Profile

125TW716I
Fixed Range

Torque Screwdrivers

- Precision micrometer scale calibrated in Inch-Pounds, increments 1 inch-lbs.
- Easy-release bit holders featuring 1/4" female hex drive securely retain bits during operation while permitting easy removal.
- Anti-backlash design for repeatability.
- Meets or exceeds ASME B107.14M and ISO 6789 specifications.
- Adjustable model accuracy is +/-6 of setting, starting at 20% of full scale. Right hand (clockwise) only.



236TSDK



1050TSD

30

PN	DESC
236TSD	2-36 Inch Lbs.
236TSDK	2-36 Inch Lbs. in Protective Case w/ Bits
236TSD140	2-36 Inch Lbs. 1/4" Square Drive
1050TSD	10-50 Inch Lbs.
1050TSDK	10-50 Inch Lbs. in Protective Case w/ Bits
1050TSD BOOT	1050TSD Replacement Boot
235TSD BOOT	236TSD Replacement Boot

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Part Number	Range / Scale					Square Drive			Profile				Tang / Alternate Head		
	Size	In. Lb.	Ft. Lb.	Nm	Preset	1/4"	3/8"	1/2"	Std	Low	CW	CCW	X Drive	Short	Fixed
30150TW14I	30-150	*				*			*					*	
30150TW14I-LP	30-150	*				*				*				*	
30150TW14I-CW	30-150	*				*					*			*	
30150TW14I-NR	30-150	*				*								*	
30150TW38I	30-150	*					*		*					*	
30150TW38I-LP	30-150	*					*			*				*	
30150TW38I-CW	30-150	*					*				*			*	
30150TW38I-NR	30-150	*					*							*	
30150TW38F	30-150		*				*		*					*	
30150TW38F-LP	30-150		*				*			*				*	
30150TW38F-CW	30-150		*				*				*			*	
40200TWS014I	40-200	*					*			*					
40200TW38I	40-200	*					*		*				*		
40200TW38I-SD	40-200	*					*		*					*	
40200TW38I-LP	40-200	*					*			*			*		
40200TW38I-LPSD	40-200	*					*			*				*	
40200TW38I-CW	40-200	*					*				*		*		
40200TW38I-CWSD	40-200	*					*				*			*	
50250TW38I	50-250	*					*		*				*		
50250TW38I-SD	50-250	*					*			*				*	
50250TW38I-LP	50-250	*					*			*			*		
50250TW38I-CW	50-250	*					*				*		*		
1050TW14I	10-50	*					*		*						
1050TW38NM	10-50			*			*		*				*		
1050TW38NM-SD	10-50			*			*			*				*	
1050TW38NM-LP	10-50			*			*			*			*		
1050TW38NM-CW	10-50			*			*				*		*		
575TW38F	5-75		*				*		*				*		
575TW38F-SD	5-75		*				*			*				*	
575TW38F-LP	5-75		*				*			*			*		
575TW38F-CW	5-75		*				*				*		*		
1575TW38F	15-75		*				*		*				*		
1575TW38F-SD	15-75		*				*			*				*	
1575TW38F-LP	15-75		*				*			*			*		
1575TW38F-CW	15-75		*				*				*		*		
150750TW12I	150-750	*					*		*				*		
150750TW12I-SD	150-750	*					*			*				*	
150750TW12I-LP	150-750	*					*			*			*		
150750TW12I-CW	150-750	*					*				*		*		
25250TW12F	25-250		*				*		*				*		
25250TW12F-SD	25-250		*				*			*				*	
25250TW12F-LP	25-250		*				*			*			*		
25250TW12F-CW	25-250		*				*				*		*		
30150TW12F	50-250		*				*		*				*		
30150TW12F-SD	50-250		*				*			*				*	
30150TW12F-LP	50-250		*				*			*			*		
30150TW12F-CW	50-250		*				*				*		*		
1050TW38NM	10-50			*			*		*				*		
1050TW38NM-SD	10-50			*			*			*				*	
1050TW38NM-LP	10-50			*			*			*			*		
1050TW38NM-CW	10-50			*			*				*		*		
125TW380I	125				*										*
125TW716I	125				*										*
125TW120I	125				*										*
125TW10MI	125				*										*
125TW13MI	125				*										*


Extensions & Adapters

RATED
1000 VAC / 1500 VDC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Extension Bars

No shortage of options here: Flared, Fiberglass, Flexible, Magnetized, Wobble. With Cementex extension bars you are never out of reach. Don't see what you're looking for? Let us know. Custom lengths and configurations available.

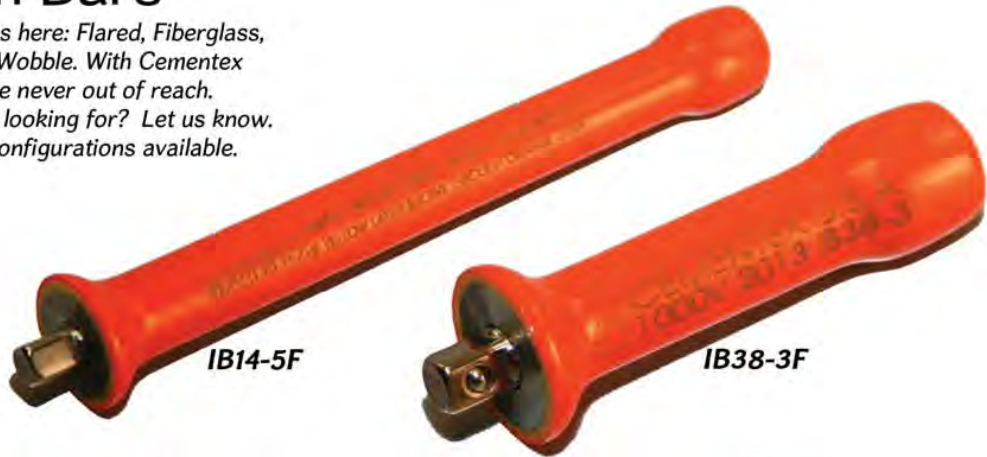

Wobble Extension Bars



IB38-8F

PN _____ 1/4" Drive _____

- IB14-2..... 2"
- IB14-3..... 3"
- IB14-6..... 6"
- IB14-10..... 10"
- IB14-14..... 14"

*all 1/4" SqDr extensions are flared as shown

PN _____ 3/8" Drive _____

- IB38-1.5..... 1-1/2"
- IB38-3..... 3"
- IB38-3F..... 3" Flared
- FX38-3..... 3" Fiberglass
- IB38-5..... 5"
- IB38-6..... 6"
- IB38-6F..... 6" Flared
- IB38-6MAG... 6" With Magnet
- IB38-6W..... 6" Wobble
- FX38-6..... 6" Fiberglass
- FX38-7..... 7" Fiberglass
- IB38-8..... 8"
- IB38-8F..... 8" Flexible
- IB38-8W..... 8" Wobble
- FX38-8..... 8" Fiberglass
- IB38-10..... 10"
- IB38-12..... 12"
- IB38-12F..... 12" Flared
- FX38-12..... 12" Fiberglass
- IB38-20..... 20"
- IB38-20F..... 20" Flared

PN _____ 1/2" Drive _____

- IB12-2..... 2"
- IB12-2F... 2" Flared
- FX12-3.... 3" Fiberglass
- IB12-5..... 5"
- IB12-5F... 5" Flared
- FX12-5.... 5" Fiberglass
- FX12-6.... 6" Fiberglass
- FX12-8.... 8" Fiberglass
- IB12-10.... 10"
- IB12-10F.. 10" Flared
- FX12-12... 12" Fiberglass
- IB12014... 14"
- FX12-14... 14" Fiberglass
- IB12-20... 20"
- FX12-20... 20" Fiberglass
- FX12-24... 24" Fiberglass
- FX12-30... 30" Fiberglass

PN _____ 3/4" Drive _____

- FX34-6... 6" Fiberglass



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Wobble / Fixed Extension Bars

The New Wobble / Fixed Extension Bars from Cementex provide the best of both worlds. The convenience and improved access to unique locations that is achieved with a wobble, plus the improved torque provided by a fixed Extension Bar; all in one.

PN	DESC
IB14-3WF.....	1/4" Drive - 3" Wobble / Fixed Extension Bar
IB14-6WF.....	1/4" Drive - 6" Wobble / Fixed Extension Bar
IB38-3WF.....	3/8" Drive - 3" Wobble / Fixed Extension Bar
IB38-6WF.....	3/8" Drive - 6" Wobble / Fixed Extension Bar
IB12-6WF.....	1/2" Drive - 6" Wobble / Fixed Extension Bar



Extension Bars/Socket Adapters

Socket Adapters



14F38M

38F14M

38F12M

12F38M

PN	DESC
14F38M.....	1/4" Female - 3/8" Male
14F38M W/W.....	1/4" Female - 3/8" Male with Washer
38F14M.....	3/8" Female - 1/4" Male
38F14M W/W.....	3/8" Female - 1/4" Male with Washer
38F14M-6.....	3/8" Female - 1/4" Male 6" Length
38F12M.....	3/8" Female - 1/2" Male
38F12M W/W.....	3/8" Female - 1/2" Male with Washer
12F38M.....	1/2" Female - 3/8" Male
12F38M W/BOOT....	1/2" Female - 3/8" Male with Boot
12F38ML.....	1/2" Female - 3/8" Male Extender
12F34M.....	1/2" Female - 3/4" Male
34F12M.....	3/4" Female - 2-1/4" Male



12F38ML

RATED
 1000 VAC / 1500 VDC
 Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Cementex offers 1,000 Volt Rated insulated sockets for use with insulated tools including; Ratchets, Torque Wrenches, Extensions Bars, T-Handled Square Drives, Breaker Bars, etc.

With a quality and selection that is unmatched in the market place, we go the extra mile by utilizing our unique coating technique. This method allows the socket to be shaped in a way that allows maximum access to the tightest of places while providing the highest level of protection.

Flush Connect: a socket without the standard "Boot" that is incorporated into most Cementex sockets. This "Boot" serves to provide coverage protection to socket / ratchet / extension bar connection points. "Flush Connect" sockets are designed for use with Cementex Non-"X-Drive" and "X-Drive" Ratchets as well as other manufacturer's Non-"X-Drive" ratchets. "Flush Connect" Sockets, when used with an extension bar, should utilize a "Flared" extension bar. All 1/4" square drive sockets from Cementex are only offered as the "Flush Connect" style.

1/4" Square Drive: SAE

SIZE__	STANDARD WALL	DEEP WALL
5/32"	IS14-05	IS14-05L
3/16"	IS14-06	IS14-06L
7/32"	IS14-07	IS14-07L
1/4"	IS14-08	IS14-08L
9/32"	IS14-09	IS14-09L
5/16"	IS14-10	IS14-10L
11/32"	IS14-11	IS14-11L
3/8"	IS14-12	IS14-12L
7/16"	IS14-14	IS14-14L
1/2"	IS14-16	IS14-16L
9/16"	IS14-18	IS14-18L



1/4" Square Drive: Metric

SIZE__	STANDARD WALL	DEEP WALL
4mm	IS14-04M	IS14-04ML
4.5mm	IS14-4.5M	IS14-4.5ML
5mm	IS14-05M	IS14-05ML
5.5mm	IS14-05.5M	IS14-05.5ML
6mm	IS14-06M	IS14-06ML
7mm	IS14-07M	IS14-07ML
8mm	IS14-08M	IS14-08ML
9mm	IS14-09M	IS14-09ML
10mm	IS14-10M	IS14-10ML
11mm	IS14-11M	IS14-11ML
12mm	IS14-12M	IS14-12ML
13mm	IS14-13M	IS14-13ML
14mm	IS14-14M	IS14-14ML
15mm	IS14-15M	IS14-15ML
16mm	IS14-16M	IS14-15ML



Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.



3/8" Square Drive: SAE



6 Point



Sockets



SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
3/16"	IS38-06 6PT	IS38-06 6PT WO	IS38-06L 6PT	IS38-06L 6PT WO
1/4"	IS38-08 6PT	IS38-08 6PT WO	IS38-08L 6PT	IS38-08L 6PT WO
5/16"	IS38-10 6PT	IS38-10 6PT WO	IS38-10L 6PT	IS38-10L 6PT WO
3/8"	IS38-12 6PT	IS38-12 6PT WO	IS38-12L 6PT	IS38-12L 6PT WO
7/16"	IS38-14 6PT	IS38-14 6PT WO	IS38-14L 6PT	IS38-14L 6PT WO
1/2"	IS38-16 6PT	IS38-16 6PT WO	IS38-16L 6PT	IS38-16L 6PTWO
9/16"	IS38-18 6PT	IS38-18 6PT WO	IS38-18L 6PT	IS38-18L 6PT WO
5/8"	IS38-20 6PT	IS38-20 6PT WO	IS38-20L 6PT	IS38-20L 6PT WO
11/16"	IS38-22 6PT	IS38-22 6PT WO	IS38-22L 6PT	IS38-22L 6PT WO
3/4"	IS38-24 6PT	IS38-24 6PT WO	IS38-24L 6PT	IS38-24L 6PT WO
13/16"	IS38-26 6PT	IS38-26 6PT WO	IS38-26L 6PT	IS38-26L 6PT WO
7/8"	IS38-28 6PT	IS38-28 6PT WO	IS38-28L 6PT	IS38-28L 6PT WO
15/16"	IS38-30 6PT	IS38-30 6PT WO	IS38-30L 6PT	IS38-30L 6PT WO
1"	IS38-32 6PT	IS38-32 6PT WO	IS38-32L 6PT	IS38-32L 6PT WO

12 Point



SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
1/4"	IS38-08	IS38-08 12PT WO	IS38-08L	IS38-08L 12PT WO
9/32"	IS38-09	IS38-09 12PT WO	IS38-09L	IS38-09L 12PT WO
5/16"	IS38-10	IS38-10 12PT WO	IS38-10L	IS38-10L 12PT WO
11/32"	IS38-11	IS38-11 12PT WO	IS38-11L	IS38-11L 12PT WO
3/8"	IS38-12	IS38-12 12PT WO	IS38-12L	IS38-12L 12PT WO
7/16"	IS38-14	IS38-14 12PT WO	IS38-14L	IS38-14L 12PT WO
1/2"	IS38-16	IS38-16 12PT WO	IS38-16L	IS38-16L 12PT WO
9/16"	IS38-18	IS38-18 12PT WO	IS38-18L	IS38-18L 12PT WO
5/8"	IS38-20	IS38-20 12PT WO	IS38-20L	IS38-20L 12PT WO
11/16"	IS38-22	IS38-22 12PT WO	IS38-22L	IS38-22L 12PT WO
3/4"	IS38-24	IS38-24 12PT WO	IS38-24L	IS38-24L 12PT WO
13/16"	IS38-26	IS38-26 12PT WO	IS38-26L	IS38-26L 12PT WO
7/8"	IS38-28	IS38-28 12PT WO	IS38-28L	IS38-28L 12PT WO
15/16"	IS38-30	IS38-30 12PT WO	IS38-30L	IS38-30L 12PT WO
1"	IS38-32	IS38-32 12PT WO	IS38-32L	IS38-32L 12PT WO
1-1/16"	IS38-34	IS38-34 12PT WO	IS38-34L	IS38-34L 12PT WO
1-1/8"	IS38-36	IS38-36 12PT WO	IS38-36L	IS38-36L 12PT WO

RATED
1000 VAC / 1500 VDC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

3/8" Square Drive: Metric



Sockets

6 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL
5mm	IS38-05M 6PT	IS38-05MM 6PT WO	IS38-05ML 6PT
6mm	IS38-06M 6PT	IS38-06MM 6PT WO	IS38-06ML 6PT
7mm	IS38-07M 6PT	IS38-07MM 6PT WO	IS38-07ML 6PT
8mm	IS38-08M 6PT	IS38-08MM 6PT WO	IS38-08ML 6PT
9mm	IS38-09M 6PT	IS38-09MM 6PT WO	IS38-09ML 6PT
10mm	IS38-10M 6PT	IS38-10MM 6PT WO	IS38-10ML 6PT
11mm	IS38-11M 6PT	IS38-11MM 6PT WO	IS38-11ML 6PT
12mm	IS38-12M 6PT	IS38-12MM 6PT WO	IS38-12ML 6PT
13mm	IS38-13M 6PT	IS38-13MM 6PT WO	IS38-13ML 6PT
14mm	IS38-14M 6PT	IS38-14MM 6PT WO	IS38-14ML 6PT
15mm	IS38-15M 6PT	IS38-15MM 6PT WO	IS38-15ML 6PT
16mm	IS38-16M 6PT	IS38-16MM 6PT WO	IS38-16ML 6PT
17mm	IS38-17M 6PT	IS38-17MM 6PT WO	IS38-17ML 6PT
18mm	IS38-18M 6PT	IS38-18MM 6PT WO	IS38-18ML 6PT
19mm	IS38-19M 6PT	IS38-19MM 6PT WO	IS38-19ML 6PT
20mm	IS38-20M 6PT	IS38-20MM 6PT WO	IS38-20ML 6PT
21mm	IS38-21M 6PT	IS38-21MM 6PT WO	IS38-21ML 6PT
22mm	IS38-22M 6PT	IS38-22MM 6PT WO	IS38-22ML 6PT



12 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
5mm	IS38-05M	IS38-05MM 12PT WO	IS38-05ML	IS38-05ML 12PT WO
6mm	IS38-06M	IS38-06MM 12PT WO	IS38-06ML	IS38-06ML 12PT WO
7mm	IS38-07M	IS38-07MM 12PT WO	IS38-07ML	IS38-07ML 12PT WO
8mm	IS38-08M	IS38-08MM 12PT WO	IS38-08ML	IS38-08ML 12PT WO
9mm	IS38-09M	IS38-09MM 12PT WO	IS38-09ML	IS38-09ML 12PT WO
10mm	IS38-10M	IS38-10MM 12PT WO	IS38-10ML	IS38-10ML 12PT WO
11mm	IS38-11M	IS38-11MM 12PT WO	IS38-11ML	IS38-11ML 12PT WO
12mm	IS38-12M	IS38-12MM 12PT WO	IS38-12ML	IS38-12ML 12PT WO
13mm	IS38-13M	IS38-13MM 12PT WO	IS38-13ML	IS38-13ML 12PT WO
14mm	IS38-14M	IS38-14MM 12PT WO	IS38-14ML	IS38-14ML 12PT WO
15mm	IS38-15M	IS38-15MM 12PT WO	IS38-15ML	IS38-15ML 12PT WO
16mm	IS38-16M	IS38-16MM 12PT WO	IS38-16ML	IS38-16ML 12PT WO
17mm	IS38-17M	IS38-17MM 12PT WO	IS38-17ML	IS38-17ML 12PT WO
18mm	IS38-18M	IS38-18MM 12PT WO	IS38-18ML	IS38-18ML 12PT WO
19mm	IS38-19M	IS38-19MM 12PT WO	IS38-19ML	IS38-19ML 12PT WO
20mm	IS38-20M	IS38-20MM 12PT WO	IS38-20ML	IS38-20ML 12PT WO
21mm	IS38-21M	IS38-21MM 12PT WO	IS38-21ML	IS38-21ML 12PT WO
22mm	IS38-22M	IS38-22MM 12PT WO	IS38-22ML	IS38-22ML 12PT WO
23mm	IS38-23M	IS38-23MM 12PT WO	IS38-23ML	IS38-23ML 12PT WO
24mm	IS38-24M	IS38-24MM 12PT WO	IS38-24ML	IS38-24ML 12PT WO
25mm	IS38-25M	IS38-25MM 12PT WO	IS38-25ML	IS38-25ML 12PT WO
26mm	IS38-26M	IS38-26MM 12PT WO	IS38-26ML	IS38-26ML 12PT WO



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.



1/2" Square Drive: SAE

Sockets

6 Point



SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
3/8"	IS12-12 6PT	IS12-12 6PT WO	IS12-12L 6PT	IS12-12L 6PT WO
7/16"	IS12-14 6PT	IS12-14 6PT WO	IS12-14L 6PT	IS12-14L 6PT WO
1/2"	IS12-16 6PT	IS12-16 6PT WO	IS12-16L 6PT	IS12-16L 6PT WO
9/16"	IS12-18 6PT	IS12-18 6PT WO	IS12-18L 6PT	IS12-18L 6PT WO
5/8"	IS12-20 6PT	IS12-20 6PT WO	IS12-20L 6PT	IS12-20L 6PT WO
11/16"	IS12-22 6PT	IS12-22 6PT WO	IS12-22L 6PT	IS12-22L 6PT WO
3/4"	IS12-24 6PT	IS12-24 6PT WO	IS12-24L 6PT	IS12-24L 6PT WO
13/16"	IS12-26 6PT	IS12-26 6PT WO	IS12-26L 6PT	IS12-26L 6PT WO
7/8"	IS12-28 6PT	IS12-28 6PT WO	IS12-28L 6PT	IS12-28L 6PT WO
15/16"	IS12-30 6PT	IS12-30 6PT WO	IS12-30L 6PT	IS12-30L 6PT WO
1"	IS12-32 6PT	IS12-32 6PT WO	IS12-32L 6PT	IS12-32L 6PT WO
1-1/16"	IS12-34 6PT	IS12-34 6PT WO	IS12-34L 6PT	IS12-34L 6PT WO
1-1/8"	IS12-36 6PT	IS12-36 6PT WO	IS12-36L 6PT	IS12-36L 6PT WO
1-3/16"	IS12-38 6PT	IS12-38 6PT WO	IS12-38L 6PT	IS12-38L 6PT WO
1-1/4"	IS12-40 6PT	IS12-40 6PT WO	IS12-40L 6PT	IS12-40L 6PT WO
1-5/16"	IS12-42 6PT	IS12-42 6PT WO	IS12-42L 6PT	IS12-42L 6PT WO
1-3/8"	IS12-44 6PT	IS12-44 6PT WO	IS12-44L 6PT	IS12-44L 6PT WO
1-7/16"	IS12-46 6PT	IS12-46 6PT WO	IS12-46L 6PT	IS12-46L 6PT WO
1-1/2"	IS12-48 6PT	IS12-48 6PT WO	IS12-48L 6PT	IS12-48L 6PT WO
1-9/16"	IS12-50 6PT	IS12-50 6PT WO	IS12-50L 6PT	IS12-50L 6PT WO

12 Point



SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
1/4"	IS12-08	IS12-08 12PT WO	IS12-08L	IS12-08L 12PT WO
5/16"	IS12-10	IS12-10 12PT WO	IS12-10L	IS12-10L 12PT WO
3/8"	IS12-12	IS12-12 12PT WO	IS12-12L	IS12-12L 12PT WO
7/16"	IS12-14	IS12-14 12PT WO	IS12-14L	IS12-14L 12PT WO
1/2"	IS12-16	IS12-16 12PT WO	IS12-16L	IS12-16L 12PT WO
9/16"	IS12-18	IS12-18 12PT WO	IS12-18L	IS12-18L 12PT WO
5/8"	IS12-20	IS12-20 12PT WO	IS12-20L	IS12-20L 12PT WO
11/16"	IS12-22	IS12-22 12PT WO	IS12-22L	IS12-22L 12PT WO
3/4"	IS12-24	IS12-24 12PT WO	IS12-24L	IS12-24L 12PT WO
13/16"	IS12-26	IS12-26 12PT WO	IS12-26L	IS12-26L 12PT WO
7/8"	IS12-28	IS12-28 12PT WO	IS12-28L	IS12-28L 12PT WO
15/16"	IS12-30	IS12-30 12PT WO	IS12-30L	IS12-30L 12PT WO
1"	IS12-32	IS12-32 12PT WO	IS12-32L	IS12-32L 12PT WO
1-1/16"	IS12-34	IS12-34 12PT WO	IS12-34L	IS12-34L 12PT WO
1-2/8"	IS12-36	IS12-36 12PT WO	IS12-36L	IS12-36L 12PT WO
1-3/16"	IS12-38	IS12-38 12PT WO	IS12-38L	IS12-38L 12PT WO
1-1/4"	IS12-40	IS12-40 12PT WO	IS12-40L	IS12-40L 12PT WO
1-5/16"	IS12-42	IS12-42 12PT WO	IS12-42L	IS12-42L 12PT WO
1-3/8"	IS12-44	IS12-44 12PT WO	IS12-44L	IS12-44L 12PT WO
1-7/16"	IS12-46	IS12-46 12PT WO	IS12-46L	IS12-46L 12PT WO
1-1/2"	IS12-48	IS12-48 12PT WO	IS12-48L	IS12-48L 12PT WO
1-9/16"	IS12-50	IS12-50 12PT WO	IS12-50L	IS12-50L 12PT WO
1-5/8"	IS12-52	IS12-52 12PT WO	IS12-52L	IS12-52L 12PT WO
1-11/16"	IS12-54	IS12-54 12PT WO	IS12-54L	IS12-54L 12PT WO
1-3/4"	IS12-56	IS12-56 12PT WO	IS12-56L	IS12-56L 12PT WO


RATED
 1,000 VAC / 1,500 VDC
 Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

1/2" Square Drive: Metric

6 Point



Sockets

RATED
1000 VAC
1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
7mm	IS12-7M 6PT	IS12-7M 6PT WO	IS12-7ML 6PT	IS12-7ML 6PT WO
8mm	IS12-8M 6PT	IS12-8M 6PT WO	IS12-8ML 6PT	IS12-8ML 6PT WO
9mm	IS12-9M 6PT	IS12-9M 6PT WO	IS12-9ML 6PT	IS12-9ML 6PT WO
10mm	IS12-10M 6PT	IS12-10M 6PT WO	IS12-10ML 6PT	IS12-10ML 6PT WO
11mm	IS12-11M 6PT	IS12-11M 6PT WO	IS12-11ML 6PT	IS12-11ML 6PT WO
12mm	IS12-12M 6PT	IS12-12M 6PT WO	IS12-12ML 6PT	IS12-12ML 6PT WO
13mm	IS12-13M 6PT	IS12-13M 6PT WO	IS12-13ML 6PT	IS12-13ML 6PT WO
14mm	IS12-14M 6PT	IS12-14M 6PT WO	IS12-14ML 6PT	IS12-14ML 6PT WO
15mm	IS12-15M 6PT	IS12-15M 6PT WO	IS12-15ML 6PT	IS12-15ML 6PT WO
16mm	IS12-16M 6PT	IS12-16M 6PT WO	IS12-16ML 6PT	IS12-16ML 6PT WO
17mm	IS12-17M 6PT	IS12-17M 6PT WO	IS12-17ML 6PT	IS12-17ML 6PT WO
18mm	IS12-18M 6PT	IS12-18M 6PT WO	IS12-18ML 6PT	IS12-18ML 6PT WO
19mm	IS12-19M 6PT	IS12-19M 6PT WO	IS12-19ML 6PT	IS12-19ML 6PT WO
20mm	IS12-20M 6PT	IS12-20M 6PT WO	IS12-20ML 6PT	IS12-20ML 6PT WO
21mm	IS12-21M 6PT	IS12-21M 6PT WO	IS12-21ML 6PT	IS12-21ML 6PT WO
22mm	IS12-22M 6PT	IS12-22M 6PT WO	IS12-22ML 6PT	IS12-22ML 6PT WO
23mm	IS12-23M 6PT	IS12-23M 6PT WO	IS12-23ML 6PT	IS12-23ML 6PT WO
24mm	IS12-24M 6PT	IS12-24M 6PT WO	IS12-24ML 6PT	IS12-24ML 6PT WO
25mm	IS12-25M 6PT	IS12-25M 6PT WO	IS12-25ML 6PT	IS12-25ML 6PT WO
26mm	IS12-26M 6PT	IS12-26M 6PT WO	IS12-26ML 6PT	IS12-26ML 6PT WO
27mm	IS12-27M 6PT	IS12-27M 6PT WO	IS12-27ML 6PT	IS12-27ML 6PT WO
28mm	IS12-28M 6PT	IS12-28M 6PT WO	IS12-28ML 6PT	IS12-28ML 6PT WO
29mm	IS12-29M 6PT	IS12-29M 6PT WO	IS12-29ML 6PT	IS12-29ML 6PT WO
30mm	IS12-30M 6PT	IS12-30M 6PT WO	IS12-30ML 6PT	IS12-30ML 6PT WO
32mm	IS12-32M 6PT	IS12-32M 6PT WO	IS12-32ML 6PT	IS12-32ML 6PT WO
36mm	IS12-36M 6PT	IS12-36M 6PT WO	IS12-36ML 6PT	IS12-36ML 6PT WO

12 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
7mm	IS12-07MM	IS12-07MM WO	IS12-07ML	IS12-07ML WO
8mm	IS12-08MM	IS12-08MM WO	IS12-08ML	IS12-08ML WO
9mm	IS12-09M	IS12-09M WO	IS12-09ML	IS12-09ML WO
10mm	IS12-10M	IS12-10M WO	IS12-10ML	IS12-10ML WO
11mm	IS12-11M	IS12-11M WO	IS12-11ML	IS12-11ML WO
12mm	IS12-12M	IS12-12M WO	IS12-12ML	IS12-12ML WO
13mm	IS12-13M	IS12-13M WO	IS12-13ML	IS12-13ML WO
14mm	IS12-14M	IS12-14M WO	IS12-14ML	IS12-14ML WO
15mm	IS12-15M	IS12-15M WO	IS12-15ML	IS12-15ML WO
16mm	IS12-16M	IS12-16M WO	IS12-16ML	IS12-16ML WO
17mm	IS12-17M	IS12-17M WO	IS12-17ML	IS12-17ML WO
18mm	IS12-18M	IS12-18M WO	IS12-18ML	IS12-18ML WO
19mm	IS12-19M	IS12-19M WO	IS12-19ML	IS12-19ML WO
20mm	IS12-20M	IS12-20M WO	IS12-20ML	IS12-20ML WO
21mm	IS12-21M	IS12-21M WO	IS12-21ML	IS12-21ML WO
22mm	IS12-22M	IS12-22M WO	IS12-22ML	IS12-22ML WO
23mm	IS12-23M	IS12-23M WO	IS12-23ML	IS12-23ML WO
24mm	IS12-24M	IS12-24M WO	IS12-24ML	IS12-24ML WO
25mm	IS12-25M	IS12-25M WO	IS12-25ML	IS12-25ML WO
26mm	IS12-26M	IS12-26M WO	IS12-26ML	IS12-26ML WO
27mm	IS12-27M	IS12-27M WO	IS12-27ML	IS12-27ML WO
28mm	IS12-28M	IS12-28M WO	IS12-28ML	IS12-28ML WO
29mm	IS12-29M	IS12-29M WO	IS12-29ML	IS12-29ML WO
30mm	IS12-30M	IS12-30M WO	IS12-30ML	IS12-30ML WO
32mm	IS12-32M	IS12-32M WO	IS12-32ML	IS12-32ML WO
36mm	IS12-36M	IS12-36M WO		



Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

SIZE	3/8" Drive		1/2" Drive	
	STD WALL	DEEP WALL	STD WALL	DEEP WALL
13/16"	IS38-26 PENTA		IS12-26 PENTA	

SIZE	3/8" Drive		1/2" Drive	
	DEEP WALL	STD WALL	DEEP WALL	STD WALL
1/2"	IS38-16L-IMPACT		IS12-16L-IMPACT	
1-1/2"	IS38-48L-IMPACT		IS12-48L-IMPACT	
1-9/16"	IS38-50L-IMPACT		IS12-50L-IMPACT	
1-5/8"	IS38-52L-IMPACT		IS12-52L-IMPACT	
1-11/16"	IS38-54L-IMPACT		IS12-54L-IMPACT	
1-5/8"	IS38-56L-IMPACT		IS12-56L-IMPACT	

Penta

5 Point 1000V rated sockets.
Additional sizes available upon request.

Impact

Sockets are manufactured with extra-thick sidewalls to withstand heavy impact and extreme torque.



Specialty and Driver Bit Sockets

Flat Tip Screw Driver Bit Sockets

	3/8" Square Drive				1/2" Square Drive					
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH			
	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN		
1/4"	IF14-140	IF14-140XL	IF38-140	IF38-140 WO	IF38-140XL	IF38-140XL WO	IF12-140L	IF12-140L WO	IF12-140XL	IF12-140XL WO
5/16"	IF14-516	IF14-516XL	IF38-516	IF38-516 WO	IF38-516XL	IF38-516XL WO	IF12-516L	IF12-516L WO	IF12-516XL	IF12-516XL WO
3/8"	IF14-380	IF14-380XL	IF38-380	IF38-380 WO	IF38-380XL	IF38-380XL WO	IF12-380L	IF12-380L WO	IF12-380XL	IF12-380XL WO
1/2"	-	-	-	-	-	-	IF12-120L	IF12-120L WO	IF12-120XL	IF12-120XL WO

Phillips Tip Screw Driver Bit Sockets

	3/8" Square Drive				1/2" Square Drive					
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH			
	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN		
#1	IP14-01	IP14-01XL	IP38-01	IP38-01 WO	IP38-01XL	IP38-01XL WO	IP12-01L	IP12-01L WO	IP12-01XL	IP12-01XL WO
#2	IP14-02	IP14-02XL	IP38-02	IP38-02 WO	IP38-02XL	IP38-02XL WO	IP12-02L	IP12-02L WO	IP12-02XL	IP12-02XL WO
#3	IP14-03	IP14-03XL	IP38-03	IP38-03 WO	IP38-03XL	IP38-03XL WO	IP12-03L	IP12-03L WO	IP12-03XL	IP12-03XL WO
#4	-	-	-	-	-	-	IP12-04L	IP12-04L WO	IP12-04XL	IP12-04XL WO

	3/8" Square Drive				1/2" Square Drive					
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH			
	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN	BOOTED	FLUSH CONN		
08	IT14-T8	IT14-T8L								
10	IT14-T10	IT14-T10L	IT38-T10	IT38-T10 WO	IT38-T10XL	IT38-T10XL WO				
15	IT14-T15	IT14-T15L	IT38-T15	IT38-T15 WO	IT38-T15XL	IT38-T15XL WO				
20	IT14-T20	IT14-T20L	IT38-T20	IT38-T20 WO	IT38-T20XL	IT38-T20XL WO				
25	IT14-T25	IT14-T25L	IT38-T25	IT38-T25 WO	IT38-T25XL	IT38-T25XL WO				
27	IT14-T27	IT14-T27L	IT38-T27	IT38-T27 WO	IT38-T27XL	IT38-T27XL WO	IT12-T27L	IT12-T27L WO	IT12-T27XL	IT12-T27XL WO
30	IT14-T30	IT14-T30L	IT38-T30	IT38-T30 WO	IT38-T30XL	IT38-T30XL WO	IT12-T30L	IT12-T30L WO	IT12-T30XL	IT12-T30XL WO
40	-	-	IT38-T40	IT38-T40 WO	IT38-T40XL	IT38-T40XL WO	IT12-T40L	IT12-T40L WO	IT12-T40XL	IT12-T40XL WO
45	-	-	IT38-T45	IT38-T45 WO	IT38-T45XL	IT38-T45XL WO	IT12-T45L	IT12-T45L WO	IT12-T45XL	IT12-T45XL WO
50	-	-	IT38-T50	IT38-T50 WO	IT38-T50XL	IT38-T50XL WO	IT12-T50L	IT12-T50L WO	IT12-T50XL	IT12-T50XL WO
55	-	-	IT38-T55	IT38-T55 WO	IT38-T55XL	IT38-T55XL WO	IT12-T55L	IT12-T55L WO	IT12-T55XL	IT12-T55XL WO

RATED 1000 VAC / 1500 VDC Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Hex Bit Sockets

Cementex Hex Bit Sockets are now available in our standard "Booted" style as well as in our "Flush Connect" configuration. This "Booted" style matches that of our standard sockets and is designed for direct connection to the Cementex "X-Drive" Ratchets and standard extension bars; providing complete coverage of conductive materials. All 1/4" square drive sockets from Cementex are only offered as the "Flush Connect" style.

Hex Bit Sockets



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts



1/4" Square Drive SAE

SIZE	3" LENGTH	6" LENGTH
1/8"	IH14-04	IH14-04XL
5/32"	IH14-05	IH14-05XL
3/16"	IH14-06	IH14-06XL
7/32"	IH14-07	IH14-07XL
1/4"	IH14-08	IH14-08XL
5/16"	IH14-10	IH14-10XL
3/8"	IH14-12	IH14-12XL
7/16"	IH14-14	IH14-14XL
1/2"	IH14-16	IH14-16XL

3/8" Square Drive SAE

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
1/8"	IH38-04	IH38-04 WO	IH38-04XL	IH38-04XL WO
9/64"	IH38-4.5	IH38-4.5 WO	IH38-4.5XL	IH38-4.5XL WO
5/32"	IH38-05	IH38-05 WO	IH38-05XL	IH38-05XL WO
3/16"	IH38-06	IH38-06 WO	IH38-06XL	IH38-06XL WO
7/32"	IH38-07	IH38-07 WO	IH38-07XL	IH38-07XL WO
1/4"	IH38-08	IH38-08 WO	IH38-08XL	IH38-08XL WO
5/16"	IH38-10	IH38-10 WO	IH38-10XL	IH38-10XL WO
3/8"	IH38-12	IH38-12 WO	IH38-12XL	IH38-12XL WO
7/16"	IH38-14	IH38-14 WO	IH38-14XL	IH38-14XL WO
1/2"	IH38-16	IH38-16 WO	IH38-16XL	IH38-16XL WO
9/16"	IH38-18	IH38-18 WO	IH38-18XL	IH38-18XL WO
5/8"	IH38-20	IH38-20 WO	IH38-20XL	IH38-20XL WO
3/4"	IH38-24	IH38-24 WO	IH38-24XL	IH38-24XL WO
7/8"	IH38-28	IH38-28 WO	IH38-28XL	IH38-28XL WO



1/2" Square Drive SAE

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
1/4"	IH12-08	IH12-08 WO	IH12-08XL	IH12-08XL WO
5/16"	IH12-10	IH12-10 WO	IH12-10XL	IH12-10XL WO
3/8"	IH12-12	IH12-12 WO	IH12-12XL	IH12-12XL WO
7/16"	IH12-14	IH12-14 WO	IH12-14XL	IH12-14XL WO
1/2"	IH12-16	IH12-16 WO	IH12-16XL	IH12-16XL WO
9/16"	IH12-18	IH12-18 WO	IH12-18XL	IH12-18XL WO
5/8"	IH12-20	IH12-20 WO	IH12-20XL	IH12-20XL WO
3/4"	IH12-24	IH12-24 WO	IH12-24XL	IH12-24XL WO

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.



1/4" Square Drive

Metric

SIZE	3" LENGTH	6" LENGTH
4mm	IH14-04M	IH14-04MXL
5mm	IH14-05M	IH14-05MXL
6mm	IH14-06M	IH14-06MXL
7mm	IH14-07M	IH14-07MXL
8mm	IH14-08M	IH14-08MXL

3/8" Square Drive

Metric

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
4mm	IH38-04M	IH38-04M WO	IH38-04MXL	IH38-04MXL WO
5mm	IH38-05M	IH38-05M WO	IH38-05MXL	IH38-05MXL WO
6mm	IH38-06M	IH38-06M WO	IH38-06MXL	IH38-06MXL WO
7mm	IH38-07M	IH38-07M WO	IH38-07MXL	IH38-07MXL WO
8mm	IH38-08M	IH38-08M WO	IH38-08MXL	IH38-08MXL WO
9mm	IH38-09M	IH38-09M WO	IH38-09MXL	IH38-09MXL WO
10mm	IH38-10M	IH38-10M WO	IH38-10MXL	IH38-10MXL WO
11mm	IH38-11M	IH38-11M WO	IH38-11MXL	IH38-11MXL WO
12mm	IH38-12M	IH38-12M WO	IH38-12MXL	IH38-12MXL WO
13mm	IH38-13M	IH38-13M WO	IH38-13MXL	IH38-13MXL WO
14mm	IH38-14M	IH38-14M WO	IH38-14MXL	IH38-14MXL WO

1/2" Square Drive

Metric

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
6mm	IH12-06M	IH12-06M WO	IH12-06MXL	IH12-06MXL WO
8mm	IH12-08M	IH12-08M WO	IH12-08MXL	IH12-08MXL WO
10mm	IH12-10M	IH12-10M WO	IH12-10MXL	IH12-10MXL WO
12mm	IH12-12M	IH12-12M WO	IH12-12MXL	IH12-12MXL WO
14mm	IH12-14M	IH12-14M WO	IH12-14MXL	IH12-14MXL WO
17mm	IH12-17M	IH12-17M WO	IH12-17MXL	IH12-17MXL WO



Hex Bit Sockets

RATED
1000 VAC / 1500 VDC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

1/4" Square Drive Socket Sets



ISS14-13L

SAE (All Kits Include - 1/4" SqDr Skt Set Pouch)

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes
ISS14-9L	IR14-LC	2" 3" 6"	6-Pt Deep Wall	3/16" 1/4" 5/16" 3/8" 7/16"
ISS14-13	IR14-LC	3" 6"	6-Pt Std Wall	3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"
ISS14-13L	IR14-LC	3" 6"	6-Pt Deep Wall	3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"
ISS14-14	IR14-LC	3" 6"	6-Pt Std Wall	5/32" 3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"

Metric (All Kits Include - 1/4" SqDr Skt Set Pouch)

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes
ISS14-13M	IR14-LC	2" 3" 6"	6-Pt Std Wall	5 6 7 8 9 10 11 12 13
ISS14-13ML	IR14-LC	2" 3" 6"	6-Pt Deep Wall	6 7 8 9 10 11 12 13 15
ISS14-14M	IR14-LC	3" 6"	6-Pt Std Wall	4 6 7 8 9 10 11 12 13 14



IHBS14-6

Hex Bit

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS14-6	N/A	N/A	3" SAE Hex Bit	1/8" 5/32" 3/16" 7/32" 1/4" 5/16"	Zippered Pouch



ISS14-18



Combo

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes
ISS14-18	IR14-LC	2" 6"	6-Pt Std Wall 3" SAE Hex Bit	3/16" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16" 1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 1/4" SqDr Skt Set Pouch

RATED 1000 VAC 1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

3/8" Square Drive Socket Sets



ISS38-12L 6PT



ISS38-16L

Socket Sets

12 - Point Standard Wall - SAE

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-8	N/A	3"	7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Driver Roll Pouch 6
ISS38-8I2	TW38DR-12: 12" T-Handle		3/8" 1/2" 9/16" 5/8" 3/4" 7/8"	T-Handle Bag, Long
ISS38-9	IR38-LC		3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Zippered Pouch
ISS38-10		5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8"		Zippered Pouch
ISS38-11	IR38-LC	3" 6"	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Driver Roll Pouch 6
ISS38-14	IR38-LC	3" 6"	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6

12 - Point Deep Wall - SAE

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-11L	IR38-LC	3" 6"	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Driver Roll Pouch 6
ISS38-11L-SO			3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6
ISS38-12FTW	1575TW38F: Torque	3" 6"	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Pocket Pouch 12
ISS38-13L	IR38-LC	3" 6"	5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8"	Driver Roll Pouch 6
ISS38-16L	IR38-LC	3" 6"	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Blow Molded Case, Small

6 - Point Deep Wall - SAE

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-12L 6PT	30150TW38I: Torque	3"	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 7/8"	Driver Roll Pouch 6

12 - Point Standard Wall Flush Connect - SAE

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-8WO			3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16"	Zippered Pouch
ISS38-16 W	IR38-LC	3" 6"	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1" N/A	

RATED
1000 VAC / 1500 VDC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

3/8" Square Drive Socket Sets



ISS38-16M WO



ISS38-10ML



Socket Sets



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

12 - Point Standard Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-4M	IR38-LC	3" 6"	10 13 17 19	
ISS38-8M	IR38-LC	3" 6"	9 10 11 12 13	Driver Roll Pouch 6
ISS38-9M	IR38-LC		10 12 13 14 15 16 18 19	Driver Roll Pouch 6
ISS38-10M			10 11 12 13 14 15 16 17 18 19	Zippered Pouch
ISS38-11M	IR38-LC:	3" 6"	10 12 13 14 15 16 18 19	Driver Roll Pouch 6
ISS38-13M	IR38-LC:	3"	10 11 12 13 14 15 16 17 18 19 22	Driver Roll Pouch 8

12 - Point Deep Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-10ML			10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-13ML	IR38-LC	3"	10 11 12 13 14 15 16 17 18 19 22	Driver Roll Pouch 8
ISS38-13ML SO			10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6
ISS38-14ML	IR38-LC	3" 6"	9 10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-15ML	IR38-LC	3" 6"	7 8 9 10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-19M	IR38-LC	3" 6"	10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6

6 - Point Standard Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-16M			17 18 19 20 21 22	Zippered Pouch
ISS38-19M 6PT	IR38-LC	3" 6"	10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6

6 - Point Deep Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-3ML			6 7 8	Zippered Pouch
ISS38-11ML			9 10 11 12 13 14 15 16 17 18 19	Zippered Pouch

12 - Point Standard Wall Flush Connect - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-16M WO	IR38-LC-SD	3" 6"	7 8 9 10 11 12 13 14 15 16 17 18 19	Snap Closure Case 601

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

3/8" Square DriveHex Bit Socket Sets



ISHS38-5



ISHS-30L

SAE

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS38-4			3" Hex Bit	1/4" 5/16" 3/8" 7/16"	Zippered Pouch
ISHS38-5	IR38-LC		3" Hex Bit	3/16" 1/4" 5/16" 3/8"	Zippered Pouch
IHBS38-7			3" Hex Bit	1/8" 3/16" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHBS38-9			3" Hex Bit	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHBS38-13	IR38-LC	3" 6"	3" Hex Bit	1/8" 9/64" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Pocket Pouch 8
IHBS38-7XL			6" Hex Bit	1/8" 3/16" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHBS38-9XL			6" Hex Bit	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHSS38-7TW	30150TW38I:Torque		3" Hex Bit 6" Hex Bit	5/16" 3/8" 7/16" 5/16" 3/8" 7/16"	Zippered Pouch

Metric

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS38-6M			3" Hex Bit	7 8 9 10 11 12	Zippered Pouch
IHBS38-7M			3" Hex Bit	6 7 8 9 10 11 12	Zippered Pouch
IHBS38-7MXL			6" Hex Bit	6 7 8 9 10 11 12	Zippered Pouch
IHBS38-8M			3" Hex Bit	6 7 8 9 10 11 12 14	Zippered Pouch
IHBS38-9M			3" Hex Bit	2 2.5 3 4 5 6 7 8 9	Zippered Pouch
IHBS38-11M-SO			3" Hex Bit	2 2.5 3 4 5 6 7 8 9	Zippered Pouch

Combo Hex Bit and Socket Sets

*** all sockets included in combo kits below are 12 Pt. 6Pt available upon request.

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
ISHS-20L	IR38-LC-SD	3" 6"	3" Hex Bit Deep Wall Flush	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8"	Blow Molded Case, Small
ISHS-30L	IR38-LC-SD	3" 6"	3" Hex Bit Std Wall Flush Deep Wall Flush	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16"	Snap Closure Case 701

Socket Sets

RATED
1000 VAC / 1500 DC
Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

1/2" Square Drive Socket Sets



Socket Sets

RATED
1,000 VAC / 1,500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

SAE (All Kits include 12 Point Sockets unless otherwise noted)

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
ISS12-11L-SO	N/A	N/A	Deep Wall	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6
ISS12-12	IR12-LC	5" 10"	Std Wall	1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6
ISS12-12L	IR12-LC	5" 10"	Deep Wall	1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Pocket Pouch 12
ISS12-21 W/O	IR12-LC	5"	Std Wall, Flush Conn Deep Wall, Flush Conn	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1" 1-1/32" 1-1/16" 1-1/8" 1-1/4"	Snap Closure Case 701

Metric

ISS12-12M	IR12-LC	5" 10"	Std Wall	12 14 16 18 19 21 22 24 25	Pocket Pouch 12
ISS12-18M	IR12-LC	5" 10"	Std Wall	7 8 9 10 11 12 13 14 15 16 17 18 19 20 21	Pocket Pouch 12

Hex Bit

IHBS12-6	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16"	
IHBS12-8	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 3/4"	Driver Roll Pouch 6
IHBS12-9	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4"	Driver Roll Pouch 6

Combo SAE

ISHS12-13	5"	3" Hex Bit Std Wall	5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16"	Snap Closure Case 601
ISHS-25	IR12-LC: 5" TW12-DR	3" Hex Bit Std Wall	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	20" Tool Box

Metric

ISHC12-17M	IR12-LC 5" TW12-DR	3" Hex Bit Std Wall	8 10 12 14 17 8 9 10 11 12 13 14 17 19	20" Tool Box
ISHS12-25M	IR12-LC 5" 3" TW12-DR	Hex Bit Sockets: Std Wall	6 8 10 12 14 16 17 20 10 11 12 13 14 16 17 19 21 22 24 25 27 28	20" Tool Box Driver Roll Pouch 6 Zippered Pouch